

We are IntechOpen, the world's leading publisher of Open Access books Built by scientists, for scientists

6,900

Open access books available

186,000

International authors and editors

200M

Downloads

Our authors are among the

154

Countries delivered to

TOP 1%

most cited scientists

12.2%

Contributors from top 500 universities



WEB OF SCIENCE™

Selection of our books indexed in the Book Citation Index
in Web of Science™ Core Collection (BKCI)

Interested in publishing with us?
Contact book.department@intechopen.com

Numbers displayed above are based on latest data collected.
For more information visit www.intechopen.com



Mass Transfer in Multiphase Mechanically Agitated Systems

Anna Kielbus-Rapala and Joanna Karcz
West Pomeranian University of Technology, Szczecin
Poland

1. Introduction

In this chapter, the results of the experimental studies concerning the volumetric mass transfer coefficient k_{La} obtained for mechanically agitated gas – liquid and gas – solid – liquid systems are discussed.

Mechanically agitated gas – liquid and gas –solid – liquid systems are widely used in many processes, for example oxidation, fermentation or wastewater treatment. In such cases, oxygen mass transfer between gas and liquid phases in the presence of solid particles can be described and analyzed by means of the volumetric mass transfer coefficient k_{La} . In the gas – liquid and gas – solid – liquid systems, the k_{La} coefficient value is affected by many factors such as geometrical parameters of the vessel, type of the impeller, operating parameters of the process (impeller speed, aeration rate), properties of the continuous phase (density, viscosity, surface tension, etc.) and also by the type, size and loading of solid particles.

To improve the efficiency of the processes conducted in gas – liquid and gas – solid – liquid three – phase systems two or more impellers on the common shaft are often used (Kielbus–Rapala & Karcz, 2009). Multiple – impeller stirred vessels due to the advantages such as increased gas hold – up, higher residence time of gas bubbles, superior liquid flow characteristics and lower power consumption per impeller are becoming more important comparing with single – impeller systems (Gogate et al., 2000). As the number of energy dissipation points increased with an increase in the impellers number on the same shaft, there is likely to be an enhancement in the gas hold – up due to gas redistribution, which results into higher values of volumetric gas – liquid mass transfer coefficient (Gogate et al., 2000).

Correct design of the vessel equipped with several agitators, therefore, the choice of the adequate configuration of the impellers for a given process depends on many parameters. That, which of the parameters will be the most important depends on the kind of process, which will be realized in the system. For the less oxygen demanding processes the designer attention is focused on the mixing intensity much more than on the volumetric mass transfer coefficient. When the most important thing is to achieve high mass transfer efficiency of the process, the agitated vessel should be such designed that the configuration of the agitators used ensure to get high both mixing intensity and the mass transfer coefficient values (Kielbus-Rapala & Karcz, 2010).

1.1 Survey of the results for gas-liquid system

Good mass transfer performance requires large interface area between gas and liquid and a high mass transfer coefficient. The obtaining the good dispersion of the gas bubbles in the liquid agitated depends on the respectively high agitator speed, therefore the characteristics of the gas-liquid flow are intensively studied (Paul et al., 2004; Harnby et al., 1997).

In literature, there are a large number of correlations for the prediction of volumetric mass transfer coefficients k_{La} in mechanically stirred gas-liquid systems (Linek et al., 1982, 1987; Nocentini et al., 1993; Gogate & Pandit, 1999; Vasconcelos et al., 2000; Markopoulos et al., 2007). Markopoulos et al. (2007) compared the results which were obtained by other authors for agitated Newtonian and non-Newtonian aerated liquids. The comparative analysis carried out by Markopoulos et al. (2007) shows that significant disagreement is observed taking into account the form of the correlations for k_{La} . Therefore, no single equation exists representing all of the mass transfer data given in literature. The differences can mainly be ascribed to the differences in the geometry of the system, the range of operational conditions, capability to gas bubbles coalescence and the measurement method used. For a given geometry of the agitated vessel and liquid properties, volumetric mass transfer coefficient k_{La} for gas-liquid system is often described in literature by means of the following dependences

$$k_{La} = f(P/V_L, w_{og}) \quad (1)$$

or

$$k_{La} = f(n, w_{og}) \quad (2)$$

where: P/V_L - specific power consumption, w_{og} - superficial gas velocity, n - agitator speed. Most often, empirical correlations have the form of the following equations

$$k_{La} = C_1(P_{G-L}/V_L)^{a1}(w_{og})^{a2} \quad (1a)$$

or

$$k_{La} = C_2(n)^{a3}(w_{og})^{a4} \quad (2a)$$

Detailed values of the exponents $a1$ and $a2$ in Eq. (1a) obtained by different authors are given in paper by Markopoulos et al. (2007).

Recently, Pinelli (2007) has studied the role of small bubbles in gas-liquid mass transfer in agitated vessels and analyzed two-fraction model for non-coalescent or moderately viscous liquids. Martin et al. (2008) analyzed the effect of the micromixing and macromixing on the k_{La} values. This study shows that each mixing scale has a particular effect on the mass transfer rate.

It is worth to notice that values of the k_{La} coefficient can be depended on the measurement method used (Kiełbus-Rapala & Karcz, 2009). Although a number of techniques were developed to measure the k_{La} values, the unsteady-state gassing-out dynamic methods (Van't Riet, 1979; Linek et al., 1982; Linek et al., 1987; Linek et al., 1996; Ozkan et al., 2000; Lu et al., 2002; Garcia-Ochoa & Gomez, 2009) are preferably used as they are fast, experimentally simple and applicable in various systems. These methods are used in many variants. For example, Machon et al. (1988) used a variation of the dynamic method in which the gas from liquid was firstly removed by vacuum and the system was then aerated

for some time. When aeration was stopped and the bubbles escaped from the liquid, the steady state concentration of dissolved oxygen was measured.

Apart from experimental studies, new methods are recently used to prediction the values of the volumetric mass transfer coefficient. Lemoine & Morsi (2005) applied artificial neural network to analyze mass transfer process in a gas-liquid system. Using CFD technique, Moilanen et al. (2008) modeled mass transfer in an aerated vessel of working volume 0.2 m³ which was equipped with Rushton, Phasejet or Combijet impeller.

1.2 Survey of the results for gas-solid-liquid system

The critical impeller speed for the solid suspension in liquid can be defined as the impeller speed at which no particles resting on the bottom of the vessel longer then 1- 3s (Zwietering, 1958). In multiple -impeller system introduction of gas into solid - liquid system implicate an increase in the impeller speed required for particles suspension just like in a single - impeller system. For solid suspension multiple impeller systems would prove to be disadvantageous if the distance between impellers is greater than the diameter of the impeller as there is an increase in the critical impeller speed for solid suspension (Gogate et al., 2000).

The data on the multiple - impeller systems working in the three - phase gas - solid - liquid systems are limited (Kielbus-Rapała & Karcz, 2009). Various aspects of the three - phase system stirring in the vessel equipped with more than one impeller on the common shaft were the aim of the studies in papers (Dutta & Pangarkar, 1995; Dohi et al., 1999, 2004; Roman & Tudose, 1997; Majirowa et al, 2002; Jahoda et al., 2000; Jin & Lant, 2004). The impellers used were usually Rushton turbines or pitched blade turbine. Dutta & Pangarkar (1995) and Dohi et al. (1999) analyzed experimentally the critical impeller speed needed to gas dispersion simultaneously with solid suspension in the systems, with four and three impellers, respectively. Critical impeller speed in multiple - impeller system can be modified easily by choosing optimal impeller combination. Power consumption in multiple - impeller systems was studied by Dohi et al., 1999, 2004; Majirowa et al., 2002; Roman & Tudose, 1997. Investigations in such systems concerned also gas hold - up (Dutta & Pangarkar, 1995; Dohi et al., 1999, 2004; Majirowa et al., 2002; Jahoda et al., 2000) and mixing time (Dutta & Pangarkar, 1995; Dohi et al., 1999; Jahoda et al., 2000). Hydrodynamics problems in the system stirred by means of triple impellers were analysed by Jin & Lant (2004). Authors compared hydrodynamic conditions in the stirred vessel with the air - lift and bubble column.

Although k_{La} coefficients were widely studied in the two - phase gas - liquid multiple - impeller systems (Arjunwadkar et. al, 1998; Fijasowa et al., 2007; Puthli et al., 2005; Moucha et al., 2003; Linek et al., 1996; Wu, 1995; Yoshida et al., 1996; Yawalkar et al., 2002) and many papers (Alper et al., 1980; Brehm et al., 1985; Lu et al., 1993; Kralj & Sinic, 1984; Chapman et al., 1983; Ruthiya et al., 2003) regard k_{La} measurements in the three - phase system stirred in the vessel equipped with single - impeller, the information in literature on this parameter in multi impeller gas - solid - liquid system is substantial.

On the basis of the literature data, the effect of solid particles on gas - liquid oxygen mass transfer rate in single - impeller systems at low solid concentrations analyzed Kielbus - Rapała & Karcz (2009) and Karcz & Kielbus - Rapała (2006). This effect was investigated by many authors (Alper et al., 1980; Brehm et al., 1985; Oguz et al., 1987; Lu et al., 1993; Kralj &

No	Ref.	Type of solids	Size of particles	Solids concentration	k_{La} coefficient Value
1.	Chandrasekaran & Sharma, 1977	activated carbon 0-2 mass %	<100 μm	0-0.2 mass % 0.2-2 mass %	increases 1.5 times Constant
2.	Joosten et al., 1977	Polypropylene, sugar, glass beads, 0-40% vol.	53-105, 250 μm 74-105 μm 53 μm , 88 μm	0-20% vol. 20-40% vol.	Constant rapidly decreases
3.	Alper et al., 1980	activated carbon, quartz sand 0-2 mass %	< 5 μm < 5 μm	0-0.2 mass % 0.2-2 mass %	increases 1.5 times constant
4.	Lee et al., 1982	glass beads 0-50 mass %	56 μm	0-30 mass % 30-50 mass %	decreases rapidly decreases slowly
5.	Chapmann et al., 1983	glass ballotini 3 and 20 mass %		0-3 mass % 3-20 mass %	slightly decreases significantly decreases
6.	Kralj & Sincic, 1984	activated carbon 0.25 and 0.5 mass %		the whole range	Constant
7.	Brehm et al., 1985	Al_2O_3 0-10% vol.	50 μm , 300 μm	0-5% vol. 5-10% vol.	increases 1.5 times Decreases
8.	Greaves & Loh, 1985	ion exchange resin 0-40 mass % glass ballotini 0-50 mass %	$780 \pm 70 \mu\text{m}$ 665 μm , 1.300 μm	0-15 mass % 15-50 mass %	constant decreases rapidly
9.	Bartos & Satterfield, 1986	glass beads 0-30% vol.	60 μm	the whole range	decreases with solid concentration increasing
10.	Mills et al., 1987	glass beads 0-40% vol.	66 μm	the whole range	decreases with solid concentration increasing
11.	Lu & Liang, 1990; cit. in Lu et al., 1993	kaolin 0-4 mass %	5.7 μm	the whole range	decreases with solid concentration increasing
12.	Lu et al., 1993	kaolin powder 0-4.5% vol. yeast 0-8% vol.	5.5 μm 3.7 μm	the whole range	increases to maximum (c.a. 2%) and then decreases
13.	Özbek & Gayik, 2001	Schotchbrite™ pads pieces (biomass): 5-25% vol.	0.1625 cm^3 , 0.65 cm^3 , 1.4625 cm^3	the whole range	decreases with solid concentration increasing
14.	Kielbus & Karcz, 2006	Sea sand 0.5-5 mass %	335 μm	0.5 mass % 2.5-5mass %	Increases Decreases
15.	Littlejohns & Daugulis, 2007	nylon 6.6, glass beads; Silicone rubber, styrene-butadiene copolymer	2.59 mm 6 mm 2.5 mm 3.59 mm	167g/l	Increases up to 268% Reducing by up to 63%

Table 1. The effect of presence and concentration of solid particles on k_{La} values determined by different authors

Sinic, 1984; Chapman et al., 1983, Ozkan et al., 2000; Kordac & Linek, 2010). The results of their studies were not always similar. The effect of presence and concentration of solid particles on volumetric mass transfer coefficient k_La determined by different authors is compared in Table 1.

Volumetric mass transfer coefficient value increased (Alper et al., 1980; Brehm et al., 1985; Lu et al., 1993), was constant (Kralj & Sinic, 1984) or slightly decreased (Chapman et al., 1983) with adding the particles in the system. Such differences can suggest that very important are properties of the particles, containing particle size (Ozbek & Gayik, 2001), density, hydrophobicity, oxygen diffusivity (Zhang et al., 2006; Littlejohns et al., 2007) and concentration. Various mechanisms were proposed for describing an enhancement of k_La caused by the particles. Shuttling effect, where absorptive particles enter the liquid boundary layer, absorbing dissolved gas and then desorbing this gas when back in the bulk phase. This effect is used especially for small particles with a size equal or smaller than the gas – liquid boundary layer (Ruthiya et al., 2003). For inert particles, without absorptive properties, the possible mechanisms which explain an enhancement of k_La include boundary layer mixing and gas – liquid interface changing. Boundary layer mixing, involving an increase in k_L due to turbulence at gas – liquid interface (Ruthiya et al., 2003; Kluytmants et al., 2003; Zhang et al., 2006), which causes a larger refreshment rate of liquid boundary layer by mixing with the bulk fluid. Changes in the gas – liquid interfacial area can be result of the particles presence at the gas – liquid interface, which can collide and interact with the gas – liquid interface or may induce turbulence near or at it, leading to a smaller effective diffusion layer or causing coalescence inhibition and an increase in a interfacial area (Ruthiya et al., 2003). However, a simple mechanism describing all cases does not exist. Comparing the data shown in Table 1 for a high concentration of the particles in the agitated three phase system it is worth to notice that values of the k_La coefficient rather decrease when the solid concentration increases (for example data given by Joosten et al., 1977; Lee et al., 1982; Brehm et al., 1985).

The results of the volumetric mass transfer coefficient k_La for the agitated three phase gas-solid-liquid system are usually correlated by different authors in the form of the following dependence

$$k_La = f(P/V_L, w_{og}, \dots) \quad (3)$$

Some correlations presented in literature are shown in Table 2.

Galaction et al. (2004) conducted the k_La coefficient measurements in the three – phase system containing various type of microorganisms. Authors studied the effect of concentration and morphology of biomass, specific power input and superficial air velocity on volumetric gas – liquid mass transfer coefficient value in the stirred vessel equipped with two turbine stirrers. They proposed the following mathematical correlation

$$k_La = aX^\alpha(P_{G-L-S}/V_L)^\beta w_{og}^\gamma \quad (4)$$

describing the influence of considered factors on k_La . The values of the parameters a , α , β and γ in Eq. (4) are given in Table 3. On the basis of the measurements authors have found that, in the bioreactor, the value of k_La depends not only on operating and geometrical parameters but also on the type and morphology of the microorganisms in the system.

Author	Equation	System	Impeller	D [m]	Operating parameters	Comments
Kralj & Sincic 1984	$k_L a = 0.109 \left(\frac{P_{G-L-S}}{V_L} \right)^{0.213} w_{og}^{0.34}$	Aqueous solution of NaOH – air – active carbon	Rushton turbine; $d/D = 0.33$	0.1	$n = 12.5-50$ 1/s; $w_{og} = 10^{-3}-10^{-2}$ m/s; $X = 0.25, 0.5$ mass%	required the presence of the antifoams (0.03-0.1% mass.)
Brehm et al. 1985	$k_L a = 0.5612 \left(\frac{P_{G-L-S}}{V_L} \right)^{0.65} \left(\frac{\eta_m}{\eta} \right)^{0.47} w_{og}^{0.4}$	water or aqueous solution of polyetylen glycol – air – different solid particles	Turbine with 4 flat blades; $d/D = 0.5$	0.145	$n = 8.33-13.33$ 1/s; $Vg = 0.139-2.78 \times 10^{-4}$ m ³ /s ; $X \leq 10$ % obj.	solids: Al ₂ O ₃ , Fe ₂ O ₃ kieselguhr, glass beads ($d_p = 50-300$ μm); sand ($d_p = 300$ μm and powder); 185 exp. points; Δ±11.5%
Brehm & Oguz 1988	$k_L a = 3.07 \cdot 10^{-3} \frac{\left(\frac{P_{G-L-S}}{V_L} \right)^{0.75} w_{og}^{0.5\alpha} D_L^{0.5}}{\eta_m^{0.34} \sigma_L^3}$	water (or various organic liquids) – air – various solid particles	Turbine with 4 flat blades; $d/D = 0.5$	0.145	$\eta_m = 1.3-40.7 \times 10^3$ Pas; $P_{G-L-S}/V_L = 0.75-6.3$ kW/m ³ ; $w_{og} = 0.84-4.2$ m/s; $\sigma_L = 24.3-71.8 \times 10^{-3}$ N/m; $D_L = 0.68-2.41$ m ² /s;	Particles: CaCO ₃ , Fe ₂ O ₃ , BaSO ₄ , n [1/s] = const = 10.83; $\alpha = (\sigma_{water}/\sigma_L)^{1/2}$ Δ±11 %

Table 2. The correlations of the volumetric mass transfer coefficient $k_L a$ for the agitated gas-solid-liquid systems and the applicability of the equations

Type of biomass	A	α	β	γ	$\pm\Delta$, %
<i>Propionibacterium shermanii</i>	6.586	-0.282	-0.0286	0.429	7.8
<i>Saccharomyces cerevisiae</i>	52.44	-0.702	-0.0762	0.514	6.8
<i>Penicillium chrysogenum</i> (aggregates)	0.193	-0.269	0.0288	0.257	8.4
<i>Penicillium chrysogenum</i> (free structure)	33.59	-1.012	-0.0463	0.94	7.6

Table 3. The values of the coefficient and exponents in Eq. (4)

2. Experimental

In this part of the chapter, our experimental results of the mass transfer coefficient $k_L a$ obtained for the gas – liquid or gas – solid – liquid systems agitated in a baffled vessel equipped with single high-speed impeller or the system of the two impellers are presented. Experimental studies were conducted in cylindrical transparent vessel of the inner diameter $D = 0.288$ m. Geometrical parameters of the vessel used are shown in Fig. 1. The vessel, equipped with a flat bottom and four baffles of the width $B = 0.1D$, was filled with liquid up to the height $H = D$ (Fig. 1a) and $H = 2D$ (Fig. 1b). The working liquid volumes were $V_L = 0.02$ m³ and $V_L = 0.04$ m³, respectively. In the vessel with single impeller the impeller was placed at a height $h = 0.33D$. In the tall vessel two high-speed impellers were located on the common shaft. The distance of the impeller from the bottom of the vessel was $h_1 = 0.167H$ for the lower and $h_2 = 0.67H$ for the upper impeller, respectively. All impellers have diameter $d = 0.33D$. Gas was introduced into liquid through a ring shaped sparger, of the diameter $d_d = 0.7d$. The sparger with 44 symmetrically drilled holes of 2 mm in diameter was located at the distance $e = 0.5h_1$ from the bottom of the vessel. To avoid surface aeration of the liquid which could disturb the measurements, the vessel was covered at the top with a transparent lid.

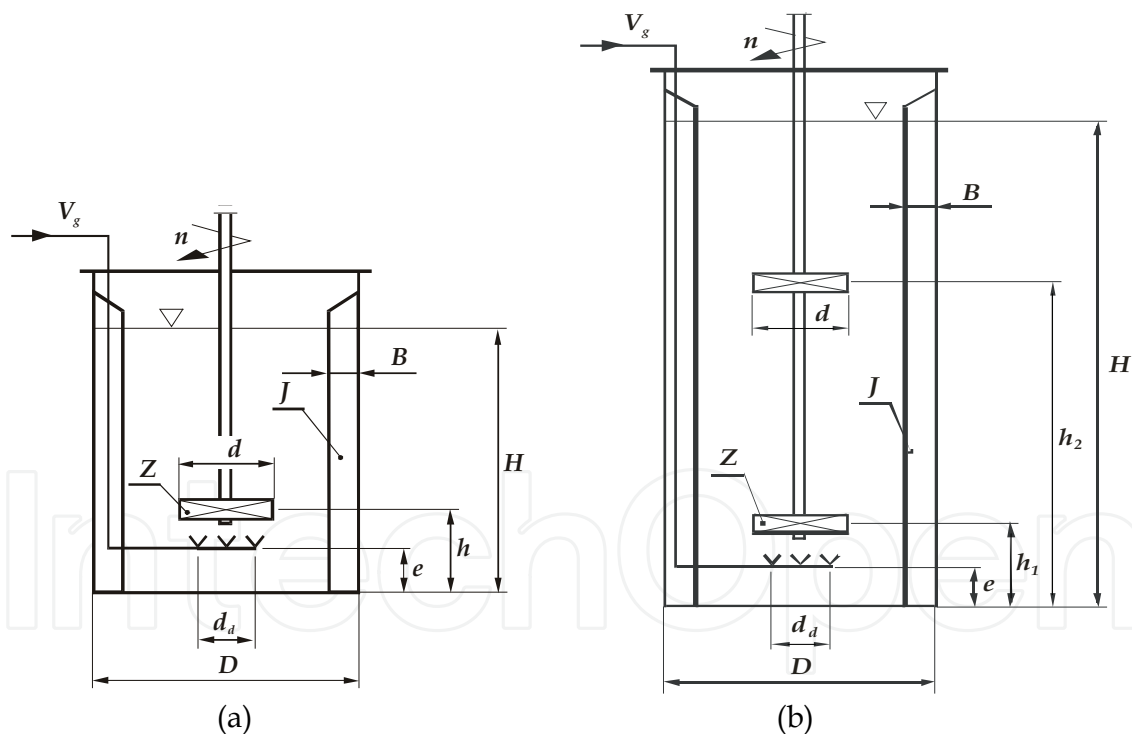


Fig. 1. Geometrical parameters of the stirred vessel; $D = 0.288$ m; $d = 0.33D$; a) $H = D$; b) $H = 2D$

Four types of high-speed agitators (Fig. 2) differing in generated fluid pumping mode were tested: Rushton and Smith turbines (radial flow impellers), A 315 (mixed flow) and HE 3 (axial flow impeller). As a single agitator were used: RT, CD 6 and A 315.

The measurements were carried out for gas-liquid and gas-solid liquid systems. Distilled water were used as a continuous phase, whilst air as gas phase. The second dispersed phase in a three-phase system was fraction of sea sand particles with mean diameter $d_p = 335$ μ m

and density $\rho_p = 2600 \text{ kg/m}^3$. The measurements were conducted under various aeration rates, impeller speeds, and solid particles concentration. The measurements were performed for three different solid concentrations, $X = 0.5, 2.5$ and 5 mass \% . The experiments were conducted at five different values of gas flow rate from the following range: $V_g \text{ (m}^3/\text{s)} \in \langle 0; 5.56 \times 10^{-3} \rangle$ (superficial gas velocity $w_{og} \text{ (m/s)} \in \langle 0; 8.53 \times 10^{-3} \rangle$). Power consumption was measured using the strain gauge method.

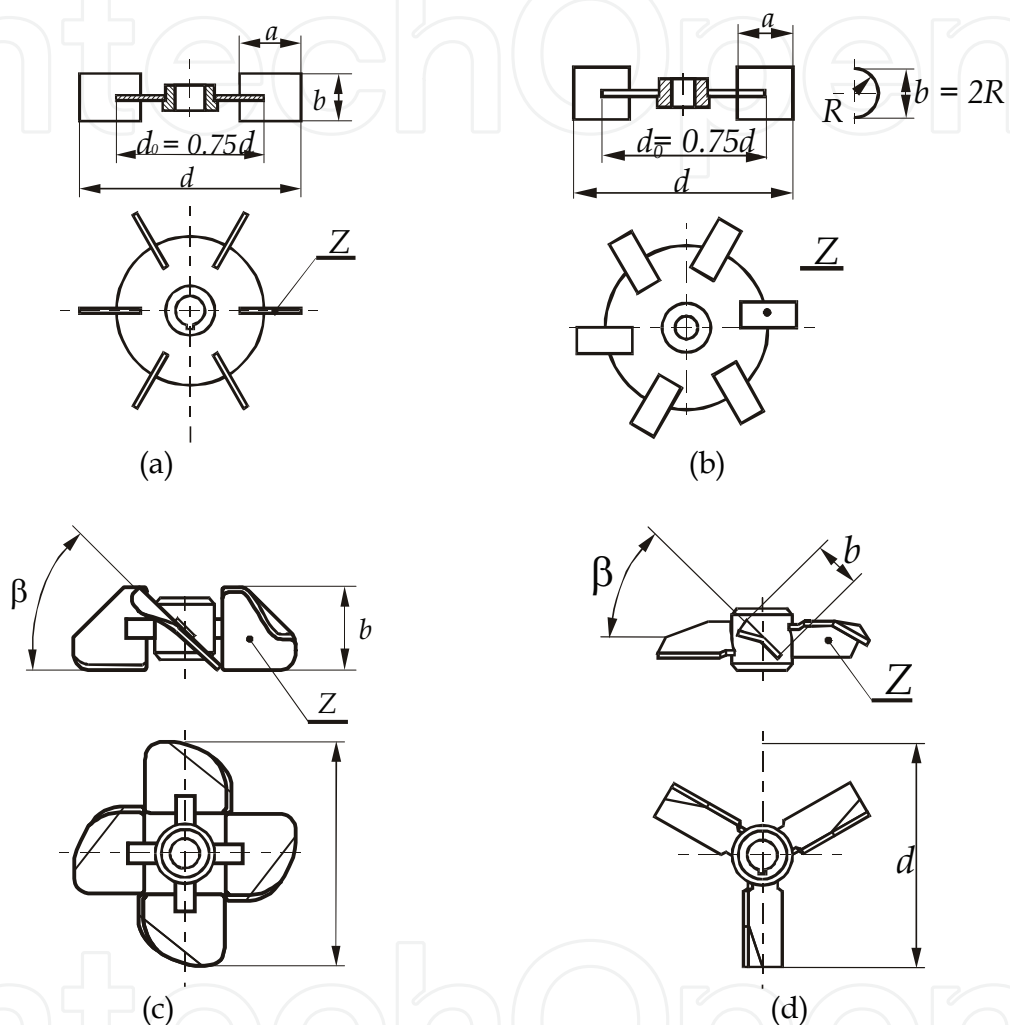


Fig. 2. Agitators used in the study; a) Rushton disc turbine (RT), b) Smith disc turbine (CD 6), c) A 315, d) HE 3

All measurements were carried out within the turbulent regime of the fluid flow in the agitated vessel. During the measurements conducted in the gas-solid-liquid system, impeller speeds higher than the critical impeller speeds n_{jSG} for the three-phase system were maintained. Critical agitator speeds in the gas-solid-liquid system were evaluated on basis of the Zwietering criterion (Zwietering, 1958).

To determine the volumetric gas-liquid mass transfer coefficients $k_L a$ the unsteady-state gassing-out dynamic method (Van't Riet, 1979; Ozkan et al., 2000; Lu et al., 2002) was used. The dynamic methods are used in many variants. In this study, the variant in which, at constant values of the impeller speed and gas flow rates, the kind of gas introduced into the vessel is changed was used. The gases were air and nitrogen. At the beginning of the

experiment, in order to remove oxygen, nitrogen was passed through the system. When the value of dissolved oxygen was lowered, air replaced nitrogen. After interchanging $N_2 \rightarrow$ air, absorption of oxygen followed. The change of the oxygen concentration dissolved in liquid was measured by means of fast oxygen probe (galvanic type) coupled with an oxygen meter (CO-551, ELMETRON). The time delay of the measuring probe was ca. 3 s. This sensor was immersed in the liquid and placed at half distance between the baffles.

In calculation of k_{La} , the response time of the probe should be taken into account (Kielbus-Rapała & Karcz, 2009). Response time is defined as the time required by the probe used in the study to measure 63 % of the overall value of the oxygen concentration change (Van't Riet, 1979) and it is related to the oxygen diffusion through the membrane of the probe. According to this fact, the measured values are sufficiently reliable (error below 6 %) only for the response time of the probe shorter or equal to $(1/k_{La})$. Therefore, in the experiments, evaluation of the oxygen probe response time was made by measuring the oxygen concentration changes after moving the probe from a liquid saturated by nitrogen to a saturated oxygen solution. The results indicate that using this probe, the k_{La} values of less than 0.1 s^{-1} are reliable. All values obtained in the measurements were lower than 0.1 s^{-1} , so the error resulting from the response time τ could be neglected.

The k_{La} coefficient values were determined from the slope of the plot $\ln[(C^*-C_0)/(C^*-C)] = f(t)$. In this dependence, t denotes time whilst C^* , C_0 , and C describe saturation concentration of gas in liquid, and concentrations of the gas at time $t = 0$ and t , respectively. The calculation was performed using the least-squares method.

3. The results

3.1 The results for gas-liquid system

Experimental investigations of the mass transfer process in the two-phase gas-liquid systems enable to determine the changes of the volumetric mass transfer coefficient values with operating parameters (impeller speed n and superficial gas velocity w_{og}). The results for the vessel with single impeller are represented by the data obtained for CD 6 impeller (Fig. 3). In this fig. the dependencies of $k_{La} = f(n)$ for various values of w_{og} are compared. It follows from the results that for all agitator tested the k_{La} coefficient value significantly increased with the increase both impeller speed and superficial gas velocity.

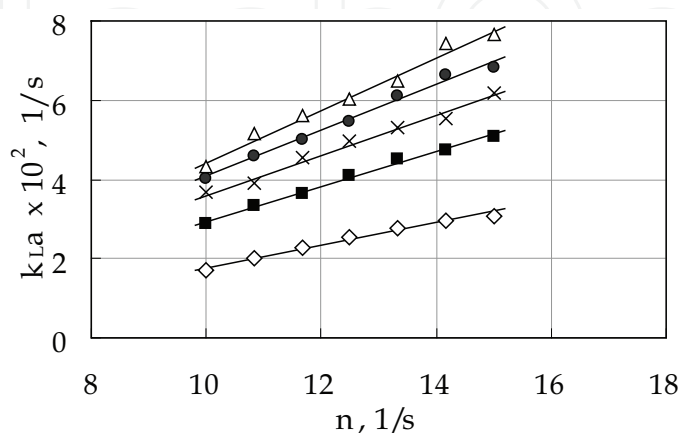


Fig. 3. The dependence of $k_{La} = f(n)$ for single Smith turbine (CD 6) working in a gas-liquid system; varied values of $w_{og} \times 10^3 \text{ m/s}$: (\diamond) 1.71; (\blacksquare) 3.41; (\times) 5.12; (\bullet) 6.82; (Δ) 8.53

The data, concerning double impeller systems, obtained for various values of superficial gas velocity w_{og} , are presented in Fig. 4a for the vessel with A 315 – Rushton turbine system and in Fig. 4b for the vessel with Smith turbine–Rushton turbine system. It can be observed that similarly to the vessel with single impeller, volumetric mass transfer coefficient is strongly affected by both impeller speed and superficial gas velocity. The differences in the k_{La} values between particular values of superficial gas velocity w_{og} are greater in the case of Smith turbine – Rushton turbine configuration.

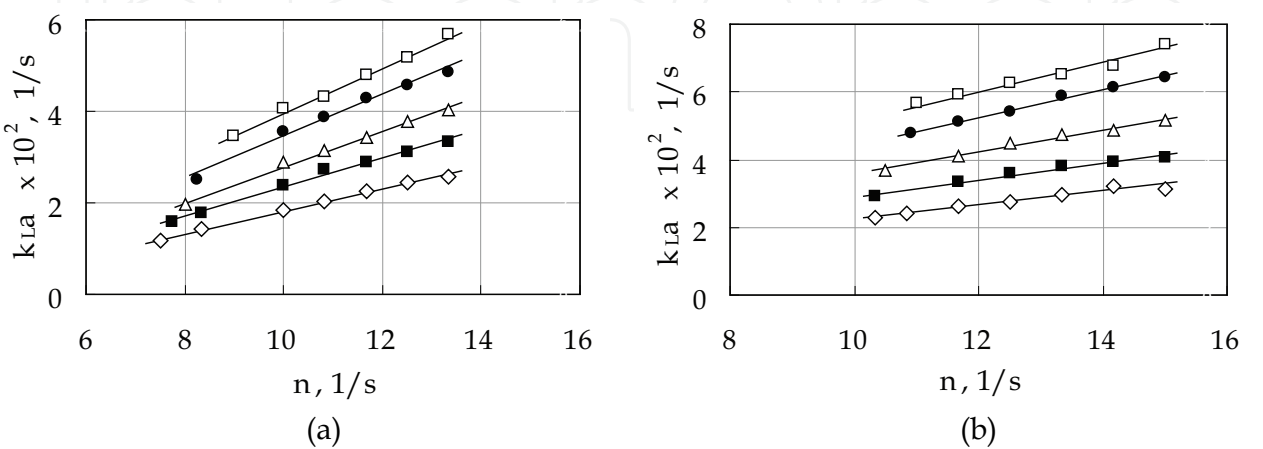


Fig. 4. The dependence of $k_{La} = f(n)$ for two configurations of the agitators: a) A 315 (lower)–RT (upper), b) CD 6 (lower) –RT (upper); gas–liquid system; varied values of $w_{og} \times 10^3$ m/s: (◇) 1.71; (■) 2.56; (Δ) 3.41; (●) 5.12; (□) 6.82

According to the literature data our results confirmed that in a gas–liquid system the volumetric mass transfer coefficient is strongly affected by the type of the agitator used for mixing of the system. The comparison of the k_{La} coefficient values obtained for three single agitators: RT, CD 6 and A 315 are presented in Fig. 5. In the vessel with radial flow both Rushton and Smith turbines the values of k_{La} coefficient were significantly higher compared to the values characterized the vessel equipped with mixed flow A 315 impeller. This tendency was observed in the whole range of the measurements.

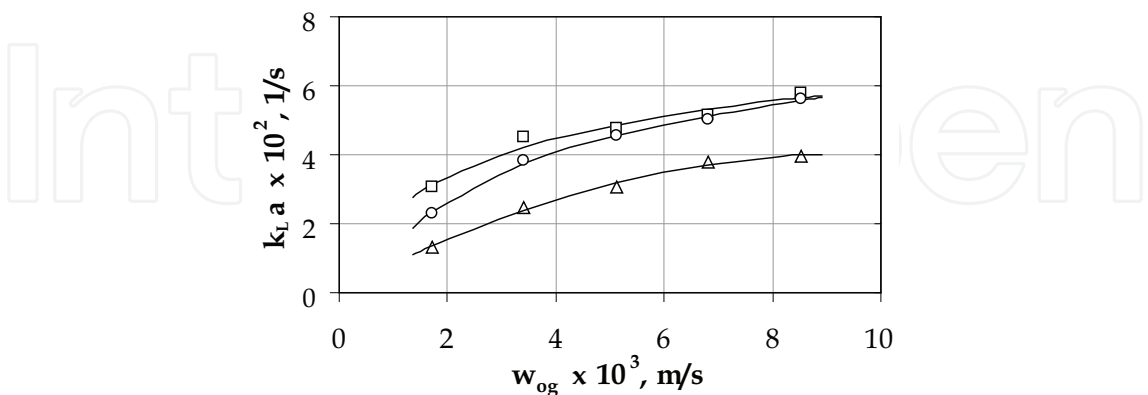


Fig. 5. The effect of a single impeller type on the k_{La} coefficient value in a gas–liquid system; $n = \text{const} = 11.67$ 1/s; (Δ) A 315; (○) CD 6; (□) RT

The effect of the impeller configuration on the volumetric mass transfer coefficient k_{La} value is presented in Figs. 6 and 7. The results concerning mass transfer processes conducting in the vessel equipped with two agitators on a common shaft showed that the type of both

lower and upper impeller strongly affects k_{La} coefficient values. In Fig. 6 the dependencies $k_{La} = f(n)$ for different impeller configurations working in a gas-liquid system were compared. Fig. 6a presents the effect of the type of an upper agitator, whilst Fig. 6b the effect of the type of a lower agitator.

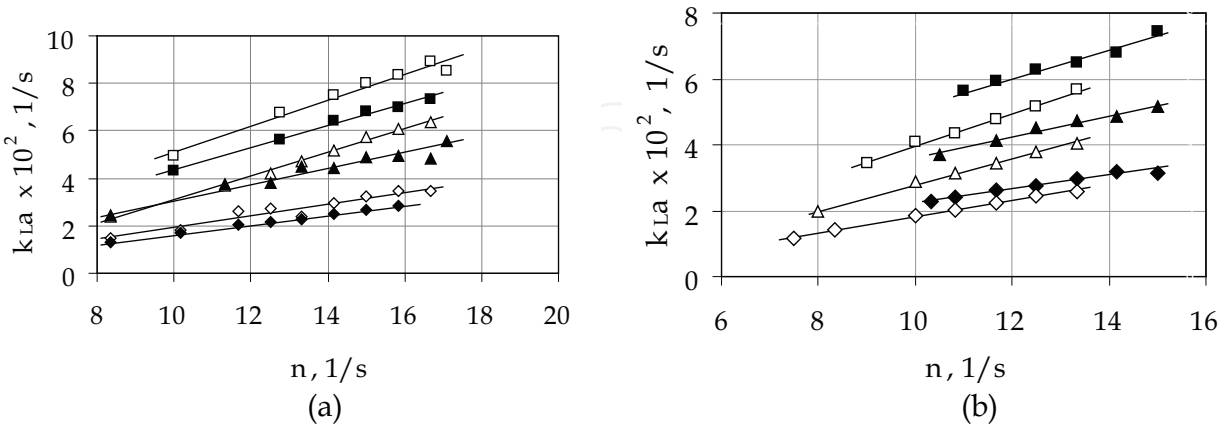


Fig. 6. The effect of the configuration of agitators on the k_{La} coefficient value; a) the effect of an upper agitator; empty points: RT-A 315 (upper), filled points: RT-HE 3 (upper); b) the effect of lower agitator; empty points: A 315 (lower)-RT; filled points: CD 6 (lower)-RT (upper); gas-liquid system; varied values of $w_{og} \times 10^3 m/s$: (\diamond) 1.71; (Δ) 3.41; (\square) 6.82

In the two-phase distilled water-air system significantly higher values of the volumetric mass transfer coefficient were obtained using the set of the impellers with A 315 as an upper one. Comparison of the k_{La} coefficient values for three chosen values of superficial gas velocity w_{og} and both configurations differ in an upper impeller is presented in Fig. 6a, 7a. The A 315 impeller (data represent by empty points in Fig. 6a), which generates radial-axial fluid flow in the vessel, let to ensure more advantageous conditions for conducting of mass transfer process, comparing with generating typical axial liquid circulation HE 3 impeller (data represent by filled points in Fig. 6a). At the constant values of agitator speeds, the differences in k_{La} coefficient values increase with the increase of quantity of gas phase introduced into the liquid volume. At the gas velocity $w_{og} = 6,28 \times 10^{-3} m/s$, k_{La} values in the system agitated by RT-A 315 configuration were over 20 % higher, than those obtained analogously using RT-HE 3 set of agitators.

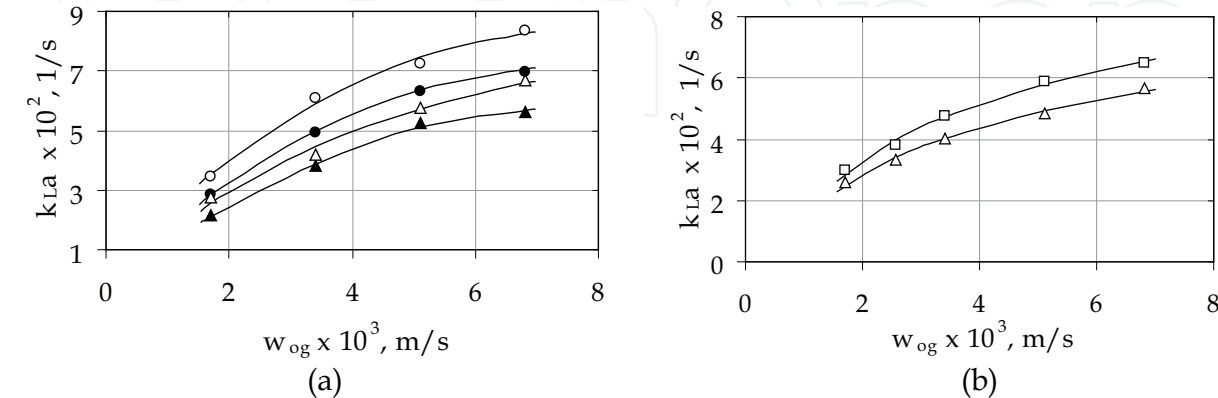


Fig. 7. Dependence $k_{La} = f(w_{og})$ for different impeller configuration; a) various upper impeller: filled points: RT-HE 3, empty points: RT-A 315, $n = 12.5 1/s$ (triangles), $n = 15.83 1/s$ (circles); b) various lower impellers: (Δ) A 315-RT, (\square) CD 6-RT; $n = 13.33 1/s$;

Comparison of the results obtained for double-impeller system differ in a lower impeller (Fig. 6b) shows, that at constant value of the impeller speed, the highest values of the k_La coefficient were obtained using Smith turbine-Rushton turbine configuration (data represent by filled points in Fig. 6b). At higher values of superficial gas velocity the differences between volumetric mass transfer coefficient values adequate to each configuration increased. The A 315 impeller, which differs in the generated profile of the fluid circulation from the turbine, is less effective as a lower impeller for the mass transfer processes in the agitated vessel comparing with CD 6 impeller (Fig. 7b). The results of the studies of the volumetric mass transfer coefficient in the gas-liquid system were described mathematically, by means of the dependency, which connect k_La coefficient with unit power consumption (P_{G-L}/V_L , W/m³) and superficial gas velocity (w_{og} , m/s):

$$k_La = A \left(\frac{P_{G-L}}{V_L} \right)^B w_{og}^C$$

(5)

The values of the coefficient A and exponents B , C in this Eq. are collected in Table 4 for single impeller system and in Table 5 for all tested configurations of double impeller. In these tables mean relative errors $\pm\Delta$ for each set of agitators is also presented. For the vessel equipped with single impeller Eq. (5) is applicable within following range of the measurements: $P_{G-L}/V_L \in <160; 5560 \text{ W/m}^3>$; $w_{og} \in <1.71 \times 10^{-3}; 8.53 \times 10^{-3} \text{ m/s}>$. The range of an application for the double impeller systems is as follows: $Re \in <7.9 \times 10^4; 16.3 \times 10^4>$; $P_{G-L}/V_L \in <540; 4500 \text{ W/m}^3>$; $w_{og} \in <1.71 \times 10^{-3}; 6.82 \times 10^{-3} \text{ m/s}>$.

No.	Impeller	A	B	C	$\pm\Delta$, %
1.	Rushton Turbine	0.029	0.44	0.534	3.7
2.	CD 6	0.028	0.374	0.622	3.3
3.	A 315	0.122	0.432	0.79	5.2

Table 4. The values of the coefficient A and exponents B , C in Eq. (5) for single impeller systems (Kielbus-Rapała et al., 2010)

No.	Configuration of impellers		A	B	C	$\pm\Delta$, %
	lower	upper				
1.	Rushton Turbine	A 315	0.098	0.404	0.689	7
2.	Rushton Turbine	HE 3	0.081	0.374	0.636	6.5
3.	A 315	Rushton Turbine	0.027	0.466	0.575	3
4.	CD 6	Rushton Turbine	0.092	0.334	0.6	2.6

Table 5. The values of the coefficient A and exponents B , C in Eq. (5) for double impeller systems (Kielbus-Rapała & Karcz, 2010)

3.2 The results for gas-solid-liquid system

On the basis of the experimental studies performed within turbulent regime of the liquid flow the volumetric mass transfer coefficient values for gas-solid-liquid systems agitated by single or double impellers were determined. The results obtained confirm that in the system with solid particles the k_La coefficient value is strongly affected by operating parameters, and also the presence and concentration of solid phase in the agitated systems.

The results of the measurements of volumetric mass transfer coefficients k_{La} in two phase gas-liquid and three phase gas-solid-liquid system agitated by single CD 6 impeller are compared in Fig. 8 (Karcz & Kielbus-Rapala, 2006). In this Fig. empty points are ascribed to the two-phase system whilst filled points correspond to the three-phase system with the concentration of the solid particles 0.5 (Fig. 8a) and 2.5 mass% (Fig. 8b), respectively.

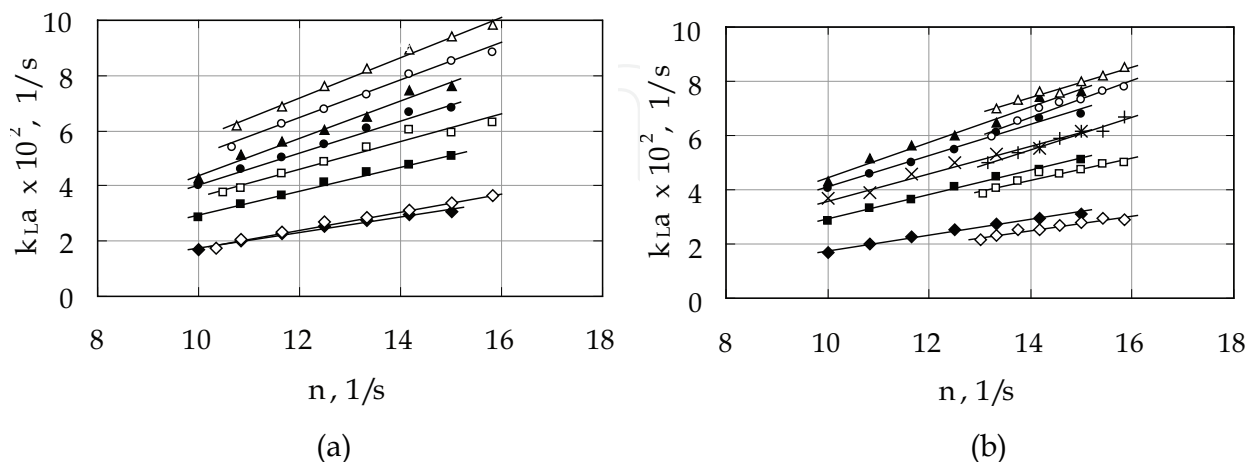


Fig. 8. Dependence $k_{La} = f(n)$ for a single impeller CD 6; filled points: $X = 0$ mass %; empty points: a) $X = 0.5$ mass %, b) $X = 2.5$ mass %; various $w_{OG} \times 10^3$ m/s: (\diamond) 1.71; (\square) 3.41; ($+$) 5.12; (\circ) 6.82; (Δ) 8.53 (Karcz & Kielbus-Rapala, 2006)

Analyzing the data in this Fig it could be concluded that in gas-solid-liquid system both superficial gas velocity and impeller speed influenced k_{La} coefficient value. Similarly to the two-phase system k_{La} coefficient value depends on the impeller speeds linearly and k_{La} increases with the increase of n . Also the increase in aeration rate of three-phase system (described by superficial gas velocity w_{OG}) causes the increase of the volumetric mass transfer coefficient.

It follows from the results that introducing solids to the system affects volumetric mass transfer coefficient k_{La} . In the system with 0.5% of solid particles inside, the values of the k_{La} are significantly higher than in the two-phase system (Fig. 8a). In coalescing system, it can be explained that solids in a small quantity during their movement in the system hit the gas bubbles, which are breaking into the smaller ones and in consequence, the interfacial area increases. However, adding more particles – 2.5 mass %, causes the decrease of k_{La} values. For lower values of superficial velocity w_{OG} , the volumetric mass transfer coefficient values are even lower than those obtained in the gas – liquid system (Fig. 8b).

Results of the k_{La} coefficient measurements for two double-impeller configurations working in gas-liquid, and gas-solid-liquid systems are compared in next Figs (Kielbus-Rapala & Karcz, 2009). The data for A 315 (lower)-RT (upper) impeller configuration are presented in Fig. 9, whilst those agitated by CD 6 (lower)-RT (upper) can be found in Fig. 10. In these figures, similarly to the data in Fig. 8 filled points are related to the two-phase system whilst empty points correspond to the three-phase system with the concentration of solid particles 0.5 mass % (Figs 9a, 10a) and 2.5 mass % (Figs 9b, 10b), respectively.

The results for the system agitated by two impellers on a common shaft show the same dependency of the volumetric mass transfer coefficient as was observed in the vessel equipped with single impeller. In the system with 0.5 mass % of solid particles, the values of k_{La} are significantly higher compared to the data for two-phase system for both

configurations of the impellers (Figs. 9a, 10a). It is worth to notice that the differences between the k_{La} values for the system with or without particles are greater for the A 315–RT configuration (Fig. 9). In the three-phase system stirred by CD 6–RT impellers, volumetric mass transfer coefficients for the lowest values of superficial gas velocity were even lower than those for gas-liquid system. These observations are also confirmed by the literature results concerning single-impeller (Alper et al., 1980; Özbek & Gayik, 2001) or double-impeller (Galaction et al., 2004) systems. For low concentration of solids, the increase of k_{La} values can be explained by the interaction of particles with gas bubbles. The particles present in the liquid cause an increase in the turbulence on the film surrounding the gas bubbles, promoting thus the bubbles surface renewal and breaking, or leading to a smaller effective diffusion layer (Galaction et al., 2004; Alper et al., 1980; Kluytmans et al., 2003). Solids in low concentration and of small particle size can, during their movement in the system, collide and interact with the gas-liquid interface and, in consequence, the gas bubbles break into smaller ones causing an increase in interfacial area (Kielbus-Rapala & Karcz, 2009).

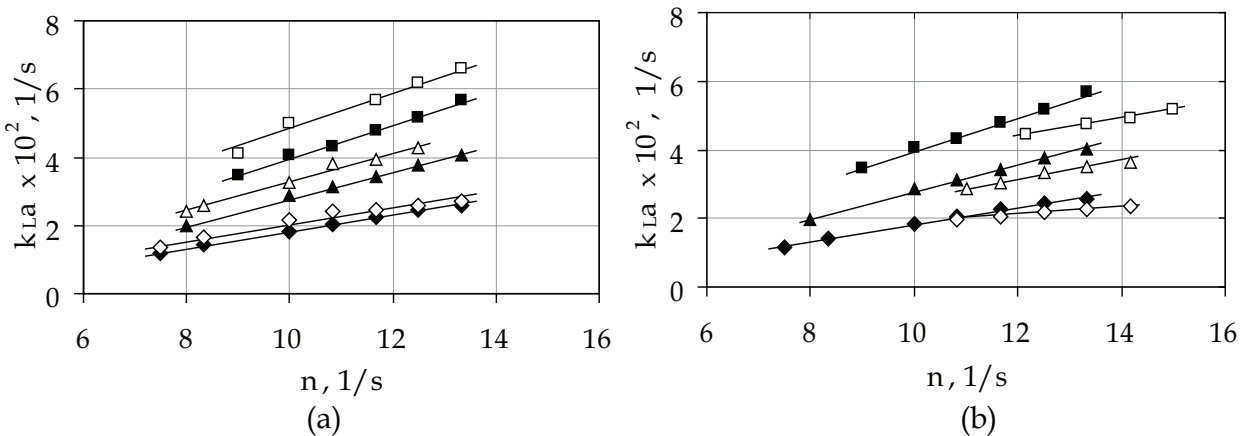


Fig. 9. Dependence $k_{La} = f(n)$ for configuration A 315 (lower)–Rushton turbine (upper); filled points: $X = 0$ mass %; empty points: a) $X = 0.5$ mass %, b) $X = 2.5$ mass %; various $w_{og} \times 10^3$ m/s: (\diamond) 1.71; (Δ) 3.41; (\square) 6.82 (Kielbus-Rapala & Karcz, 2009)

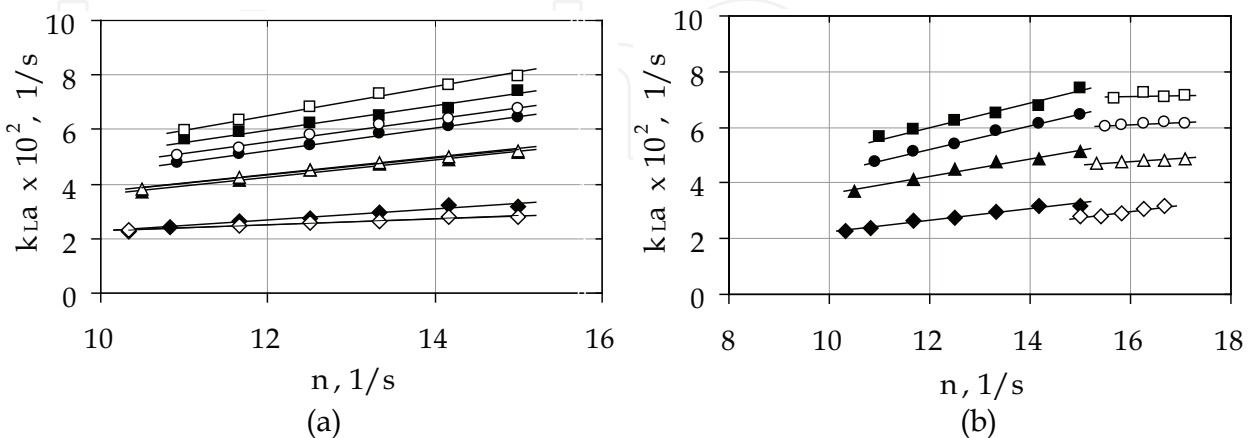


Fig. 10. Dependence $k_{La} = f(n)$ for the stirrers design CD 6 (lower)–Rushton turbine (upper); filled points: $X = 0$ mass %; empty points: a) $X = 0.5$ mass %, b) $X = 2.5$ mass %; various $w_{og} \times 10^3$ m/s: (\diamond) 1.71; (Δ) 3.41; (\circ) 5.12; (\square) 6.82 (Kielbus-Rapala & Karcz, 2009)

The investigations of mass transfer process in the system agitated by double-impellers confirm that the volumetric mass transfer coefficient increases, compared to the system without solids, only below a certain level of particles concentration.

Introducing more particles, $X = 2.5$ mass % into the system causes a decrease of k_{La} in A 315-RT (Fig. 9b) as well as in CD 6-RT (Fig. 10b) configuration. This tendency (reduction of k_{La} with increasing solid concentrations) was observed also in literature (Özbek & Gayik, 2001). It was proposed that increasing solid concentration causes an increase of slurry viscosity, resulting in an increase of coalescence processes and, in consequence, decrease of k_{La} coefficients.

The effect of solids on k_{La} could be probably associated with the differences in flow patterns generated in the agitated vessel as seen by the significant differences in the k_{La} values obtained using different impeller designs. Özbek and Gayik (2001) stated that the concentration at which k_{La} began to decline depended on solids type and size of the particles.

The results obtained for the solid concentration $X = 2.5$ mass % (Kielbus-Rapala & Karcz, 2009) differ from those of a single-impeller system (Fig. 8) so the effect of particles with this concentration for the double - impeller system was not the same. Although in both cases, the values of k_{La} were lower compared to the system with $X = 0.5$ mass %, k_{La} coefficients were significantly lower compared to a gas-liquid system at all w_{og} values (Figs 9, 10), whilst in a single-impeller system (Fig. 8b), the volumetric mass transfer coefficient values were lower only for lower values of superficial gas velocity w_{og} (Karcz & Kielbus-Rapala, 2006).

The effect of the solid phase concentration on the volumetric mass transfer coefficient value for both impeller configurations differ in lower impeller is presented in Fig. 11 (Kielbus-Rapala & Karcz, 2009). The values of k_{La} coefficient, obtained at a constant value of superficial gas velocity for the system with different solid concentration agitated by A 315-RT configuration (Fig. 11a) and CD 6-RT (Fig. 11b) are compared. In this Fig. triangles described data for gas-liquid system, squares - $X = 0.5$ mass%, circles - $X = 2.5$ mass%.

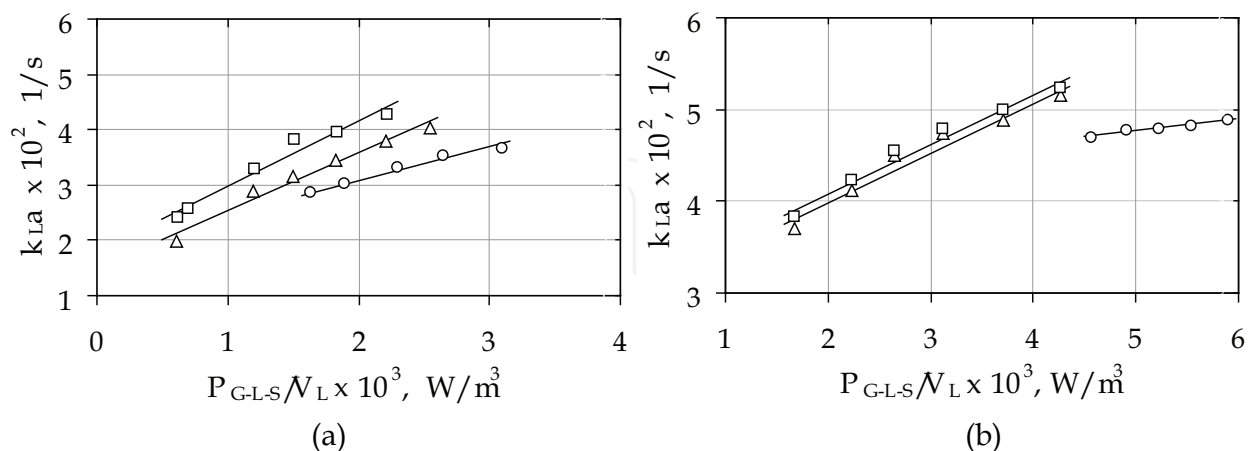


Fig. 11. Effect of the solid concentration on k_{La} value for double impeller configuration; a) A 315 (lower)-Rushton turbine (upper), b) CD 6 (lower)-Rushton turbine (upper); $w_{og} = \text{const} = 3.41 \times 10^{-3} \text{ m/s}$, $X = 0$ mass % (triangles); $X = 0.5$ mass % (squares); $X = 2.5$ mass % (circles) (Kielbus-Rapala & Karcz, 2009)

In the three-phase system agitated by both impeller configurations differ in an upper impeller type significantly lower k_{La} coefficient value were obtained in the system with solid

concentration $X = 2.5 \text{ mass \%}$. The data for RT-A 315 and RT-HE 3 agitator design are compared in Fig. 12 in which squares concerned system with $X = 0.5 \text{ mass\%}$ whilst triangles : $X = 2.5 \text{ mass \%}$.

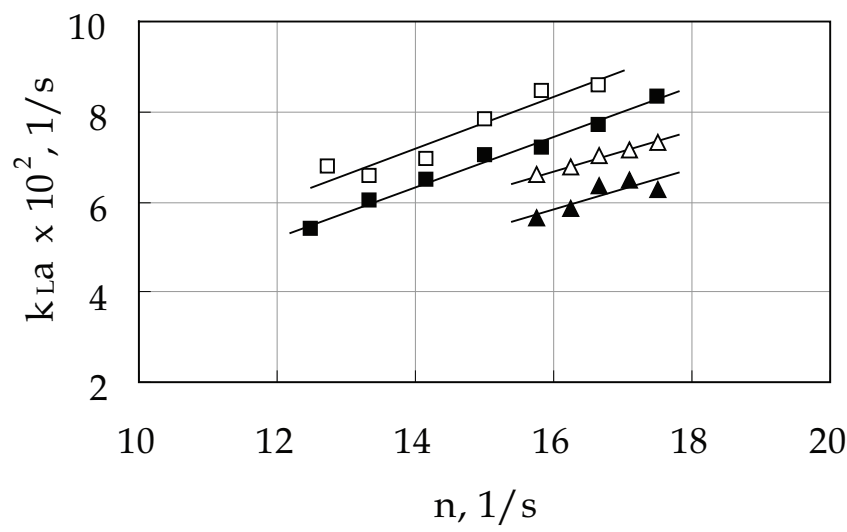


Fig. 12. The dependence of $k_{La} = f(n)$ for two configurations of the agitator working in gas-solid-liquid system; empty points: RT (lower)-A 315 (upper), filled points: RT (lower)-HE 3 (upper); various values of X : ($\square \blacksquare$) 0.5 mass %; ($\triangle \blacktriangle$) 2.5 mass %

The effect of the single agitator type on the volumetric mass transfer coefficient k_{La} is presented in Fig. 13. Comparing the results obtained for each impeller it can be stated that, in general, the highest values of the k_{La} coefficient are characterized for Rushton turbine. However, at higher values of the superficial gas velocity w_{og} the better results of the volumetric mass transfer coefficient correspond to CD 6 impeller. The A 315 impeller, which differs in the generated profile of the liquid circulation (Karcz & Kielbus-Rapała, 2006).

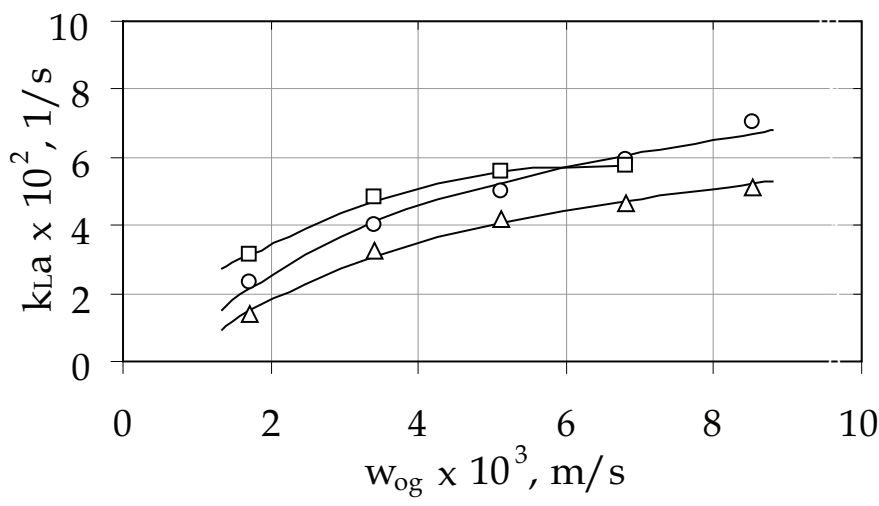


Fig. 13. Comparison of the $k_{La} = f(w_{og})$ for different single impellers working in the three-phase system with solid concentration $X = 2.5 \text{ mass \%}$; (\square) RT, $n = 13.33 \text{ 1/s}$; (\circ) CD 6, $n = 13.33 \text{ 1/s}$; (\triangle) A 315, $n = 12.50 \text{ 1/s}$

The effect of upper agitator type on the volumetric mass transfer coefficient value in the gas-solid-liquid system is presented in Fig. 14.

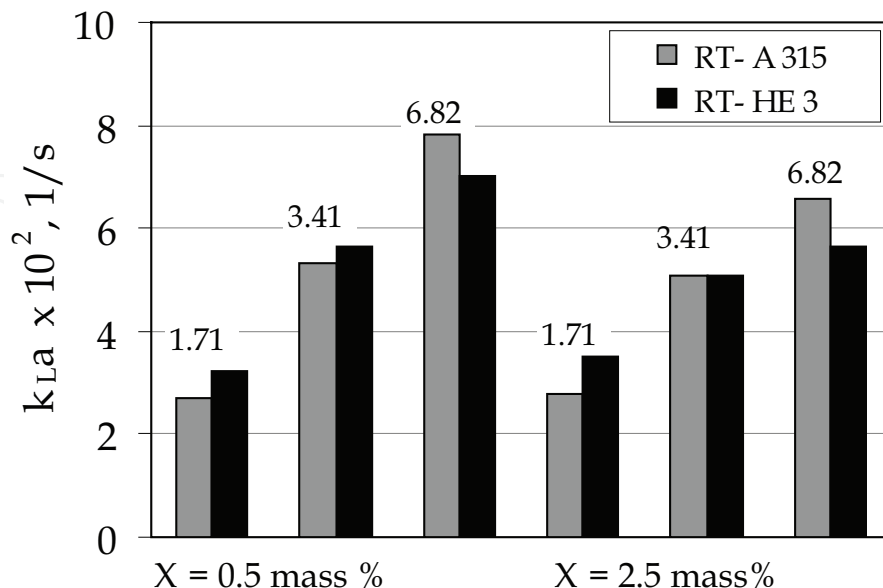


Fig. 14. Comparison of values of k_{La} coefficient for two impeller configurations, working in gas-solid-liquid systems; $X \neq \text{const}$; $n = 15 \text{ 1/s}$; various values of superficial gas velocity $w_{og} \times 10^{-3} \text{ m/s}$

In the three-phase system that, which agitator ensure better conditions to conduct the process of gas ingredient transfer between gas and liquid phase, depends significantly on the quantity of gas introduced into the vessel. Comparison of values of k_{La} coefficient for two impeller configurations, working in gas-solid-liquid systems with two different solid concentrations is presented in Fig. 14. At lower value of superficial gas velocity ($w_{og} = 1.71 \times 10^{-3} \text{ m/s}$) both in the system with lower solid particles concentration $X = 0.5 \text{ mass \%}$ and with greater one: $X = 2.5 \text{ mass \%}$, higher of about 20 % values of volumetric mass transfer coefficient were obtained in the system agitated by means of the configuration with HE 3 impeller. With the increase of gas velocity w_{og} the differences in the values of k_{La} coefficient achieved for two tested impellers configuration significantly decreased. Moreover, in the system with lower solid concentration at the velocity $w_{og} = 3.41 \times 10^{-3} \text{ m/s}$, in the whole range of impeller speeds, k_{La} values for both sets of impellers were equal.

Completely different results were obtained when much higher quantity of gas phase were introduced in the vessel. For high value of w_{og} for both system including 0.5 and 2.5 mass % of solid particles, more favourable was configuration Rushton turbine - A 315. Using this set of agitators about 20 % higher values of the volumetric mass transfer coefficient were obtained, comparing with the data characterized the vessel with HE 3 impeller as an upper one (Fig. 12).

The data obtained for three-phase systems were also described mathematically. On the strength of 150 experimental points Equation (2) was formulated:

$$k_{La} = A \left(\frac{P_{G-L-S}}{V_L} \right)^b w_{og}^c \left(\frac{1}{1 + m_1 X^2 + m_2 X} \right) \quad (6)$$

The values of the coefficient A , m_1 , m_2 , and exponents B , C in this Eq. are collected in Table 6 for single impeller system and in Table 7 for the configurations of double impeller differ in a lower one. In these tables mean relative error $\pm\Delta$ is also presented. For the vessel equipped with single impeller Eq. (6) is applicable within following range of the measurements: $P_{G-L-S}/V_L \in <118; 5700 \text{ W/m}^3>$; $w_{og} \in <1.71 \times 10^{-3}; 8.53 \times 10^{-3} \text{ m/s}>$; $X \in <0.5; 5 \text{ mass \%}>$. The range of an application of this equation for the double impeller systems is as follows: $P_{G-L-S}/V_L \in <540; 5960 \text{ W/m}^3>$; $w_{og} \in <1.71 \times 10^{-3}; 6.82 \times 10^{-3} \text{ m/s}>$; $X \in <0.5; 5 \text{ mass \%}>$.

No.	Impeller	A	b	c	m_1	m_2	$\pm\Delta$, %	Exp. point
1.	Rushton turbine (RT)	0.031	0.43	0.515	-186,67	11.921	6.8	100
2.	Smith turbine (CD 6)	0.038	0.563	0.67	-388.62	23.469	6.6	98
3.	A 315	0.062	0.522	0.774	209.86	-11.038	10.3	108

Table 6. The values of the coefficient A , m_1 , m_2 and exponents b , c in Eq. (6) for single impeller systems (Kielbus-Rapala et al., 2010)

No.	Configuration of impellers		A	b	c	m_1	m_2	$\pm\Delta$, %
	lower	upper						
1.	CD 6	RT	0.164	0.318	0.665	0.361	8.81	3
2.	A 315	RT	0.031	0.423	0.510	-0.526	-8.31	4

Table 7. The values of the coefficient A , m_1 , m_2 and exponents b , c in Eq. (6) for double impeller systems (Kielbus-Rapala & Karcz, 2009)

The results of the k_La coefficient measurements for the vessel equipped with double impeller configurations differ in an upper impeller were described by Eq. 7.

$$k_La = A \left(\frac{P_{G-L-S}}{V_L} \right)^B w_{og}^C \frac{1}{1 + mX}$$

(7)

The values of the coefficient A , m , and exponents B , C in this Eq. for both impeller designs are collected in Table 8. The range of application of Eq. 2 is as follows: $Re \in <9.7; 16.8 \times 10^4>$; $P_{G-L-S}/V_L \in <1100; 4950 \text{ W/m}^3>$; $w_{og} \in <1.71 \times 10^{-3}; 6.82 \times 10^{-3} \text{ m/s}>$; $X \in <0; 0.025>$.

No.	Configuration of impellers		A	B	C	m	$\pm\Delta$, %
	lower	upper					
1.	Rushton Turbine	A 315	0.103	0.409	0.695	4.10	4.8
2.	Rushton Turbine	HE 3	0.031	0.423	0.510	6.17	6.4

Table 8. The values of the coefficient A and exponents B , C in Eq. (7) (Kielbus-Rapala & Karcz 2010)

4. Conclusions

In the multi – phase systems the k_La coefficient value is affected by many factors, such as geometrical parameters of the vessel, type of the impeller, operating parameters in which process is conducted (impeller speed, aeration rate), properties of liquid phase (density, viscosity, surface tension etc.) and additionally by the type, size and loading (%) of the solid particles.

The results of the experimental analyze of the multiphase systems agitated by single impeller and different configuration of two impellers on the common shaft show that within the range of the performed measurements:

1. Single radial flow turbines enable to obtain better results compared to mixed flow A 315 impeller.
2. Geometry of lower as well as upper impeller has strong influence on the volumetric mass transfer coefficient values. From the configurations used in the study for gas-liquid system higher values of k_La characterized Smith turbine (lower)-Rushton turbine and Rushton turbine-A 315 (upper) configurations.
3. In the vessel equipped with both single and double impellers the presence of the solids in the gas-liquid system significantly affects the volumetric mass transfer coefficient k_La . Within the range of the low values of the superficial gas velocity w_{og} , high agitator speeds n and low mean concentration X of the solids in the liquid, the value of the coefficient k_La increases even about 20 % (for single impeller) comparing to the data obtained for gas-liquid system. However, this trend decreases with the increase of both w_{og} and X values. For example, the increase of the k_La coefficient is equal to only 10 % for the superficial gas velocity $w_{og} = 5.12 \times 10^{-3}$ m/s. Moreover, within the highest range of the agitator speeds n value of the k_La is even lower than that obtained for gas-liquid system agitated by means of a single impeller.

In the case of using to agitation two impellers on the common shaft k_La coefficient values were lower compared to a gas-liquid system at all superficial gas velocity values.

4. The volumetric mass transfer coefficient increases, compared to the system without solids, only below a certain level of particles concentration. Introducing more particles, $X = 2.5$ mass % into the system causes a decrease of k_La in the system agitated by both single and double impeller systems.
5. In the gas-solid-liquid system the choice of the configuration (upper impeller) strongly depends on the gas phase participation in the liquid volume:
 - The highest values of volumetric mass transfer coefficient in the system with small value of gas phase init were obtained in the vessel with HE 3 upper stirrer;
 - In the three-phase system, at large values of superficial gas velocity better conditions to mass transfer process performance enable RT-A 315 configuration.

Symbols

a	length of the blade	m
B	width of the baffle	m
b	width of the blade	m
C	concentration	g/dm ³
D	inner diameter of the agitated vessel	m
d	impeller diameter	m

d_d	diameter of the gas sparger	m
d_p	particles diameter	m
e	distance between gas sparger and bottom of the vessel	m
H	liquid height in the agitated vessel	m
h_1	off – bottom clearance of lower agitator	m
h_2	off – bottom clearance of upper agitator	m
i	number of the agitators	
J	number of baffles	
k_{La}	volumetric mass transfer coefficient	s^{-1}
n	agitator speed	s^{-1}
n_{JSG}	critical impeller speed for gas – solid – liquid system	s^{-1}
P	power consumption	W
R	curvature radius of the blade	m
t	time	s
V_L	liquid volume	m^3
V_g^*	gas flow rate	m^3s^{-1}
w_{og}	superficial gas velocity ($= 4 V_g / \pi D^2$)	$m s^{-1}$
X	mass fraction of the particles	% w/w
Z	number of blades	

Greek Letters

β	pitch of the impeller blade	deg
ρ_p	density of solid particles	kgm^{-3}

Subscripts

G-L	refers to gas – liquid system
G-S-L	refers to gas – solid – liquid system

5. References

- Alper, E.; Wichtendahlet, B. & Deckwer, W.D. (1980). Gas absorption mechanism in catalytic slurry reactions. *Chemical Engineering Science*, 35, 217-222
- Arjunwadkar, S.J.; Sarvanan, K.; Pandit, A.B. & Kulkarni, P.R. (1998). Gas - liquid mass transfer in dual impeller bio-reactor. *Biochemical Engineering Journal*, 1, 93-96
- Bartos, T.M. & Satterfield, C.N. (1986). Effect of finely divided solids on mass transfer between a gas and organic liquid. *AIChE Journal*, 32, 773-780
- Brehm, A.; Oguz, H. & Kisakurek, B. (1985). Gas - liquid mass transfer data in an three phase stirred vessel. *Proceedings of the 5th European Conference on Mixing*, pp. 419-425, Wurzburg, Germany, June 10-12, 1985
- Brehm, A. & Oguz, H. (1988). Measurement of gas/liquid mass transfer: peculiar effects In aqueous and organic slurries. *Proceedings of the 6th European Conference on Mixing*, pp. 413-420, Pavia, Italy, 24-26.05.1988
- Chandrasekaran, K. & Sharma, M.M. (1977). Absorption of oxygen in aqueous solutions of sodium sulfide in the presence of activated carbon as catalyst. *Chemical Engineering Science*, 32, 669-675
- Chapman, C.M.; Nienow, A.W.; Cooke, M. & Middleton, J.C. (1983). Particle - gas - liquid mixing in stirred vessels. Part IV: Mass transfer and final conclusions. *Chemical Engineering Research & Design*, 61, 3, 182-185


- Dohi, N.; Matsuda, Y.; Itano, N.; Shimizu, K.; Minekawa, K. & Kawase, Y. (1999). Mixing characteristics in slurry stirred tank reactors with multiple impellers. *Chemical Engineering Communications*, 171, 211-229
- Dohi, N.; Takahashi, T.; Minekawa, K. & Kawase, Y. (2004). Power consumption and solid suspension performance of large - scale impellers in gas - liquid - solid three - phase stirred tank reactors. *Chemical Engineering Journal*, 97, 103-114, doi:10.1016/S1385-8947(03)00148-7
- Dutta, N.N. & Pangarkar, V.G. (1995). Critical impeller speed for solid suspension in multi - impeller three phase agitated contactors. *Canadian Journal of Chemical Engineering*, 73, 273-283
- Fujasova, M.; Linek, V. & Moucha, T. (2007). Mass transfer correlations for multiple - impeller gas - liquid contactors. Analysis of the effect of axial dispersion in gas liquid phases on "local" k_{La} values measured by the dynamic pressure method in individual stages of the vessel. *Chemical Engineering Science*, 62, 1650-1669, doi:10.1016/j.ces.2006.12.03
- Galaction, A.I.; Cascaval, D.; Oniscu, C. & Turnea, M. (2004). Modeling of oxygen transfer in stirred bioreactors for bacteria, yeasts and fungus broths. *Proceedings of the 16th International Congress of Chemical & Processing Engineering, CHISA, Paper F1.5 Praha, Czech Republic, August 22-26, 2004*
- Garcia-Ochoa, F. & Gomez, E. (2009). Bioreaktor scale-up oxygen transfer rate in microbial processes. An overview. *Biotechnology Advances*, 27, 153-176.
- Gogate, P.R.; Beenackers, A.A.C.M. & Pandit A.B. (2000). Multiple - impeller systems with special emphasis on bioreactors: a critical review. *Biochemical Engineering Journal*, 6, 109-144
- Gogate, P.R. & Pandit, A.B. (1999). Survey of measurement for gas-liquid mass transfer coefficient in bioreactors. *Biochemical Engineering Journal*, 4, 7-15
- Greaves, M. & Loh, V.Y. (1985). Effect of high solids concentrations on mass transfer and gas hold-up in three - phase mixing. *Proceedings of 5th European Conference on Mixing*, pp. 451-467, Germany, Wurzburg, 10-12.06.1985
- Harnby, N.; Edwards, M.F. & Nienow A.W. (1997). *Mixing in the process industries*, second edition, Butterworth, Heinemann, ISBN 0 7506 37609, Oxford
- Jahoda, M.; Machoň, V.; Veverka, P. & Majířová, H. (2000). Homogenisation of the liquid in three - phase multiimpeller stirred reactor. *Proceedings of the 14th International Congress of Chemical & Processing Engineering, CHISA, Paper E4.5, Praha, Czech Republic August 27-31, 2000*
- Jin, B. & Lant, P. (2004). Flow regime, hydrodynamics, floc size distribution and sludge properties in activated sludge bubble column, air - lift and aerated stirred reactors. *Chemical Engineering Science*, 59, 2379-2388, doi:10.1016/j.ces.2004.01.061
- Joosten, G.E.H; Schilder, J.G.M. & Jansen, J.J. (1977). The influence of suspended solid material on the gas-liquid mass transfer in stirred gas-liquid contactors. *Chemical Engineering Science*, 32, 563-570
- Karcz, J. & Kielbas-Rapala, A. (2006). An effect of solids on the volumetric gas - liquid mass - transfer coefficient in mechanically agitated gas - solid - liquid system. *Proceedings of the 17th International Congress of Chemical & Processing Engineering, CHISA, Praha, Czech Republic, August 27-31, 2006*

- Kielbus – Rapala, A. & Karcz, J. (2009). Influence of suspended solid particles on gas-liquid mass transfer coefficient in a system stirred by double impellers. *Chemical Papers*, 63, 2, 188-196, doi:10.2478/s11696-009-013-y
- Kielbus – Rapala, A. & Karcz, J. (2010). The influence of stirrers' configuration on the volumetric gas-liquid mass transfer coefficient in multiphase systems. Paper P5.80. *Proceedings of the 19th International Congress of Chemical & Processing Engineering, CHISA, Praha, Czech Republic, August 28- September 1, 2010*
- Kielbus – Rapala, A., Karcz, J. & Cudak, M. (2010). The effect of physical properties of the liquid phase on the gas-liquid mass transfer coefficient in the two- and three-phase agitated systems. *Proceedings of the 37th International Conference of Slovak Society of Chemical Engineering*, pp. 1310-1318, ISBN 978-80-227-3290-1, Tatranske Matliare, Slovakia, May 24-28, 2010
- Kordac, M. & Linek, V. (2010). Effect of solid particle size on mass transfer between gas and liquid. Paper I3.1. *Proceedings of the 19th International Congress of Chemical & Processing Engineering, CHISA, Praha, Czech Republic, August 28- September 1, 2010*
- Kluytmans, J.H.J.; Wachem, B.G.M.; Kuster, B.F.M. & Schouten, J.C. (2003). Mass transfer in sparged and stirred reactors: influence of carbon particles and electrolyte. *Chemical Engineering Science*, 58, 4719-4728, doi:10.1016/j.ces.2003.05.004
- Kralj, F. & Sincic, D. (1984). Hold - up and mass transfer in two- and three - phase stirred tank reactor, *Chemical Engineering Science*, 39, 604-607
- Lee, J.C.; Ali, S.S. & Tasakorn, P. (1982). Influence of suspended solids on gas-liquid mass transfer in an agitated tank. *Proceedings of 4th European Conference on Mixing*, pp. 399-408, Noordwijkerhout, The Netherlands, April, 1982
- Lemoine, R. & Morsi, B.I. (2005). An algorithm for predicting the hydrodynamic and mass transfer parameters in agitated reactors. *Chemical Engineering Journal*, 114, 9-31
- Linek, V.; Moucha, T. & Sinkule, J. (1996). Gas - liquid mass transfer in vessel stirred with multiple impellers - I. Gas - liquid mass transfer characteristics in individual stages. *Chemical Engineering Science*, 51, 3203-3212
- Linek, V.; Vacek, V. & Benes, P. (1987). A critical review and experimental verification of correct use of dynamic method for the determination of oxygen transfer in aerated agitated vessels to water, electrolytic solutions and viscous liquids. *Chemical Engineering Journal*, 34, 11-34
- Linek, V.; Benes, P. & Vacek, V. (1982). A critical review and experimental verification of correct use of dynamic method for the determination of oxygen transfer in aerated agitated vessels to water, electrolytic solutions and viscous liquids. *Chemical Engineering Journal*, 25, 77-88
- Littlejohns, J.V. & Daugulis, A.J. (2007). Oxygen transfer in a gas - liquid system containing solids of varying oxygen affinity. *Chemical Engineering Journal*, 129, 67-74, doi:10.1016/j.cej.2006.11.002
- Lu, W.M.; Hsu, R.C. & Chou, H.S. (1993). Effect of solid concentration on gas liquid mass transfer in a mechanically agitated three phase. *Journal Chin. I. Chemical Engineering*, 24, 31-39
- Lu, W.M.; Wu, H.Z. & Chou, C.Y. (2002). Gas recirculation rate and its influences on mass transfer in multiple impeller systems with various impeller combinations. *The Canadian Journal of Chemical Engineering*, 80, 51-62

- Machon, V.; Vlcek, J. & Hudcova, V. (1988). Multi-impeller gas-liquid contactors. *Proceedings of the 6th European Conference on Mixing*, pp. 351-360, Pavia, Italy, 1988, May 24-26
- Majiřova, H.; Prokopa, T.; Jagoda, M. & Machoň, V. (2002). Gas hold - up and power input in two - and three - phase dual - impeller stirred reactor. *Proceedings of the 15th International Congress of Chemical & Processing Engineering, CHISA, Praha, Czech Republic*, 2002, August 25-29
- Markopoulos, J.; Christofi, C. & Katsiniris, J. (2007). Mass transfer coefficients in mechanically agitated gas-liquid contactors. *Chemical Engineering & Technology* 30, 7, 829-834, doi: 10.1002/ceat.200600394
- Martin, M.; Montes, F.J. & Galan, M.E. (2008). On the contribution of the scales of mixing to the oxygen transfer in stirred tanks. *Chemical Engineering Journal*, 145, 232-241
- Mills, D.B.; Bar, R. & Kirwan, D.J. (1987). Effect of solid on oxygen transfer in agitated three phase systems. *AIChE Journal*, 33, 1542
- Moilanen, P.; Laakkonen, M.; Visuri, O.; Alopaeus, V. & Aittamaa, J. (2008). Modelling mass transfer in an aerated 0.2 m³ vessel agitated by Rushton, Phasejet and Combijet impellers. *Chemical Engineering Journal*, 142, 92-108
- Moucha, T.; Linek, V. & Prokopová, E. (2003). Gas hold - up, mixing time and gas - liquid volumetric mass transfer coefficient of various multiple - impeller configurations: Rushton turbine, pitched blade and Techmix impeller and their combinations. *Chemical Engineering Science*, 58, 1839-184, doi:10.1016/S0009-2509(02)00682-6
- Nocentini, M., Fajner, D., Pasquali, G. & Majeli, F. (1993). Gas - liquid mass transfer and hold-up in vessels stirred with multiple Rushton turbines: water and glycerol solution. *Industrial Engineering & Chemical Research*, 32, 19-24
- Oguz, H.; Brehm, A. & Deckwer, W.D. (1987). Gas-liquid mass transfer in sparged agitated slurries. *Chemical Engineering Science*, 42, 1815-1822
- Özbek, B. & Gayik, S. (2001). The studies on the oxygen mass transfer coefficient in bioreactor. *Proc. Biochem.*, 36, 729-741
- Ozkan, O.; Calimli, A.; Berber, R. & Oguz, H. (2000). Effect on inert solid particles at low concentrations on gas - liquid mass transfer in mechanically agitated reactors. *Chemical Engineering Science*, 55, 2737-2740
- Paul, E.L.; Atiemo-Obeng, V.A & Kresta, S.M. (2004). *Handbook of Industrial Mixing*, Wiley-Interscience, ISBN 0-471-26919-0, Hoboken, New Jersey
- Pinelli, D. (2007). The role of small bubbles in gas-liquid mass transfer in stirred vessels and assessment of a two-fraction model for noncoalescent or moderately viscous liquids. *Chemical Engineering Science*, 62, 3767-3776
- Puthli, M.S.; Rathod, V.K. & Pandit, A.B., (2005). Gas - liquid mass transfer studies with triple impeller system on a laboratory scale bioreactor. *Biochemical Engineering Journal*, 23, 25-30, doi:10.1016/j.bej.2004.10.006
- Roman, R.V. & Tudose, R.Z., (1997). Studies on transfer processes in mixing vessels: power consumption of the modified Rushton turbine agitators in three - phase systems. *Bioprocess Engineering*, 17, 307-316
- Ruthiya, K.C.; Schaaf, J. & Kuster, B.F.M, (2003). Mechanism of physical and reaction enhancement of mass transfer in a gas inducing stirred slurry reactor. *Chemical Engineering Journal*, 96, 55-69, doi:10.1016/j.cej.2003.08.05
- Van't Riet, K., (1979). Review of measuring methods and results in nonviscous gas-liquid mass transfer in stirred vessels. *Industrial Engineering Chemical Process Design and Development*, 18, 357-364

- Vasconcelos, J.M.T.; Orvalho, S.C.P.; Rodrigues, A.M.A.F. & Alves, S.S. (2000). Effect of Blade shape on the performance of six bladed disc turbine impellers. *Industrial Engineering & Chemical Research*, 39, 203-208
- Wu, H. (1995). An issue on applications of a disk turbine for gas-liquid mass transfer. *Chemical Engineering Science*, 50, 17, 2801-2811
- Yawalkar, A.A.; Heesink, A.B.M.; Versyeg, G.F. & Pangarkar, V.G. (2002). Gas-liquid mass transfer coefficient in stirred tank reactors. *Canadian Journal of Chemical Engineering*, 80, 5, 840-848
- Yoshida, M.; Kitamura, A.; Yamagiwa, K. & Ohkawa, A. (1996). Gas hold-up and volumetric oxygen transfer coefficient in an aerated agitated vessel without baffles having forward-reverse rotating impellers. *Canadian Journal of Chemical Engineering*, 74, 840-848
- Zhang, G.D.; Cai, W.F., Xu, C.J., Zhou & M. (2006). A general enhancement factor model of the physical absorption of gases in multiphase system. *Chemical Engineering Science*, 61, 558-568, doi:10.1016/j.ces.2005.07.035
- Zwietering, T.N. (1958). Suspending of solids particles in liquid by agitation. *Chemical Engineering Science*, 8, 244-253.

IntechOpen

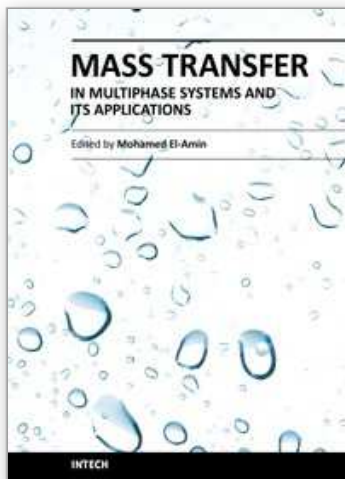

Mass Transfer in Multiphase Systems and its Applications

Edited by Prof. Mohamed El-Amin

ISBN 978-953-307-215-9

Hard cover, 780 pages

Publisher InTech

Published online 11, February, 2011

Published in print edition February, 2011

This book covers a number of developing topics in mass transfer processes in multiphase systems for a variety of applications. The book effectively blends theoretical, numerical, modeling and experimental aspects of mass transfer in multiphase systems that are usually encountered in many research areas such as chemical, reactor, environmental and petroleum engineering. From biological and chemical reactors to paper and wood industry and all the way to thin film, the 31 chapters of this book serve as an important reference for any researcher or engineer working in the field of mass transfer and related topics.

How to reference

In order to correctly reference this scholarly work, feel free to copy and paste the following:

Anna Kielbus-Rapała and Joanna Karcz (2011). Mass Transfer in Multiphase Mechanically Agitated Systems, Mass Transfer in Multiphase Systems and its Applications, Prof. Mohamed El-Amin (Ed.), ISBN: 978-953-307-215-9, InTech, Available from: <http://www.intechopen.com/books/mass-transfer-in-multiphase-systems-and-its-applications/mass-transfer-in-multiphase-mechanically-agitated-systems>

INTECH
open science | open minds

InTech Europe

University Campus STeP Ri
Slavka Krautzeka 83/A
51000 Rijeka, Croatia
Phone: +385 (51) 770 447
Fax: +385 (51) 686 166
www.intechopen.com

InTech China

Unit 405, Office Block, Hotel Equatorial Shanghai
No.65, Yan An Road (West), Shanghai, 200040, China
中国上海市延安西路65号上海国际贵都大饭店办公楼405单元
Phone: +86-21-62489820
Fax: +86-21-62489821

© 2011 The Author(s). Licensee IntechOpen. This chapter is distributed under the terms of the [Creative Commons Attribution-NonCommercial-ShareAlike-3.0 License](https://creativecommons.org/licenses/by-nc-sa/3.0/), which permits use, distribution and reproduction for non-commercial purposes, provided the original is properly cited and derivative works building on this content are distributed under the same license.

IntechOpen

IntechOpen