

We are IntechOpen, the world's leading publisher of Open Access books Built by scientists, for scientists

6,900

Open access books available

186,000

International authors and editors

200M

Downloads

Our authors are among the

154

Countries delivered to

TOP 1%

most cited scientists

12.2%

Contributors from top 500 universities



WEB OF SCIENCE™

Selection of our books indexed in the Book Citation Index
in Web of Science™ Core Collection (BKCI)

Interested in publishing with us?
Contact book.department@intechopen.com

Numbers displayed above are based on latest data collected.
For more information visit www.intechopen.com



Orthonormal Basis and Radial Basis Functions in Modeling and Identification of Nonlinear Block-Oriented Systems

Rafał Stanisławski and Krzysztof J. Latawiec
*Department of Electrical, Control and Computer Engineering
Opole University of Technology
Poland*

1. Introduction

Nonlinear block-oriented systems, including the Hammerstein, Wiener and feedback-nonlinear systems have attracted considerable research interest both from the industrial and academic environments (Bai, 1998), (Greblicki, 1989), (Latawiec, 2004), (Latawiec et al., 2003), (Latawiec et al., 2004), (Pearson & Pottman, 2000).

It is well known that orthonormal basis functions (OBF) (Bokor et al., 1999) have proved to be useful in identification and control of dynamical systems, including nonlinear block-oriented systems (Gómez & Baeyens, 2004), (Latawiec, 2004), (Latawiec et al., 2003), (Latawiec et al., 2006), (Latawiec et al., 2004), (Stanisławski et al., 2006). In particular, an inverse OBF (IOBF) modeling approach has been effective in identification of a linear dynamic part of the feedback-nonlinear and Hammerstein systems (Latawiec, 2004), (Latawiec et al., 2004). On the other hand, regular OBF (ROBF) modeling approach has proved to be useful in identification of the Wiener system. The approaches provide the separability in estimation of linear and nonlinear submodels (Latawiec et al., 2004), thus eliminating the bilinearity issue detrimentally affecting e.g. the ARX-based modeling schemes (Latawiec, 2004), (Latawiec et al., 2003), (Latawiec et al., 2006), (Latawiec et al., 2004). The IOBF modeling approach is continued to be efficiently used here to model a linear dynamic part of the feedback-nonlinear and Hammerstein systems and regular OBF modeling approach is used to model a linear part of the Wiener system.

The problem of modeling of a nonlinear static part of the nonlinear block-oriented system can be classically tackled using e.g. the polynomial expansion (Latawiec, 2004), (Latawiec et al., 2004) or (cubic) spline functions. Recently, a radial basis function network (RBFN) has been used to model a nonlinear static part of the Hammerstein and feedback-nonlinear systems and a very good identification performance has been obtained (Hachino et al., 2004), (Stanisławski, 2007), (Stanisławski et al., 2007). The concept is extended here to cover the Wiener system.

This paper presents a new strategy for nonlinear block-oriented system identification, which is a combination of OBF modeling for a linear dynamic part and RBFN modeling for a nonlinear static element. The effective OBF approach is finally coupled with the RBFN modeling concept, giving rise to the introduction of a powerful method for identification of the nonlinear block-oriented system.

2. Regular and inverse OBF modelling concept

2.1 Regular OBF modeling

It is well known that an open-loop stable linear discrete-time system described by the transfer function $G(q)$ can be represented with an arbitrary accuracy by the model $\hat{G}(q) = \sum_{i=1}^M c_i L_i(q)$, including a series of orthonormal transfer functions $L_i(q)$ and the weighting parameters c_i , $i=1, \dots, M$, characterizing the model dynamics. Thus, the model of the system can be written as (Latawiec, 2004), (Latawiec et al., 2006), (Latawiec et al., 2004)

$$\hat{y}(t) = \sum_{i=1}^M c_i L_i(q) u(t) \quad (1)$$

Various OBF can be used in (1). Two commonly used sets of OBF are simple Laguerre and Kautz functions. These functions are characterized by the 'dominant' dynamics of a system, which is given by a single real pole (p) or a pair of complex ones (p, p^*), respectively.

In case of discrete Laguerre models to be exploited hereinafter, the orthonormal functions

$$L_i(q, p) = \frac{\sqrt{1-p^2}}{q-p} \left[\frac{1-pq}{q-p} \right]^{i-1} \quad i=1, \dots, M \quad (2)$$

consist of a first-order low-pass factor and $(i-1)$ th-order all-pass filters. Dominant Laguerre pole p can be selected in an experimental way or can be determined with the aid of the stochastic gradient (SG) estimator (Boukris et al., 2006), (Oliveira, 2000).

2.1 Inverse OBF modeling

In case of use of the inverse OBF (IOBF) concept to model a linear dynamic part, the model equation can be presented in form

$$\hat{G}^{-1}(q) \hat{y}(t) = u(t) \quad (3a)$$

$$R(q) \hat{y}(t) = u(t) \quad (3b)$$

where FIR model $R(q) = r_0 q^d + r_1 q^{d-1} + \dots + r_d + r_{d+1} q^{-1} \dots + r_{L-1} q^{-L+d+1}$ is the inverse of the system model $\hat{G}(q)$. In the IOBF concept, the inverse $R(q)$ of the system is modeled using OBF. An OBF modeling approach can now be applied to equation (3b) instead of (3a) and finally we can present equation (1) in the following form (Latawiec et al., 2003)

$$y(t) + \sum_{i=1}^M c_i L_i(q, p) y(t) = \beta_0 u(t-d) + e_1(t) \quad (4)$$

where $e_1(t)$ is the equation error, d is the time delay of the system, β_0 and c_i $i=1, \dots, M$ are the OBF model parameters.

3. RBF network

The nonlinear function approximated by a Radial Basis Functions Network (RBFN) consists of two layers of neurons (one hidden and one output layer). The hidden layer consists of m

neurons, where each neuron implements the radial activated function. The output layer consists of one linear neuron which realizes weighted sum of outputs of hidden layer neurons. The output of RBFN is described by the equation

$$x(t) = \sum_{i=1}^m w_i \phi_i(u(t)) \quad (5)$$

where $w_i, i=1, \dots, m$ are the weighting coefficients and $\phi_i(u(t))$ are the outputs of hidden layer neurons. Typically, the Gaussian function is used as an activation function in RBFN. The Gaussian functions are modeled by two parameters characterizing their centers α_i and widths σ_i . In this case the $\phi_i(u(t))$ is given by the equation

$$\phi_i(u(t)) = \exp\left(-\|u(t) - \alpha_i\|^2 / \sigma_i^2\right) \text{ for } i=1, \dots, m \quad (6)$$

where $\|\cdot\|$ is the Euclidian norm.

Important advantage of the RBF network is that the weighting coefficients $w_i, i=1, \dots, m$ can be estimated by using classical, linear estimation schemes e.g. recursive/adaptive least squares (RLS/ALS), or least mean squares (LMS). The centers α_i and widths σ_i ($i=1, \dots, m$) of the RBF can be determined with the aid of the stochastic gradient (SG) estimator (Kim et al., 2006), genetic algorithm (Hachino et al., 2004) or other optimization methods. However, in practical applications, the optimization of the α_i and σ_i is not absolutely necessary. It has been found in simulations (Stanisławski, 2007) that RBFN without optimization (with regular distribution of the centers and constant widths) can produce satisfactory solutions.

3. Nonlinear block-oriented systems

3.1 Hammerstein system

The Hammerstein system consists of two cascaded elements, where the first one is a nonlinear memoryless gain and the second one is a linear dynamic model. The whole Hammerstein system can be described by the equation

$$y(t) = G(q)[f(u(t)) + e_H(t)] = G(q)[x(t) + e_H(t)] \quad (7)$$

where $G(q)$ models a dynamic linear part, $f(\cdot)$ describes a nonlinear function, $x(t)$ is the unmeasured output of the nonlinear part and $e_H(t)$ is the error/disturbance term. An alternative output error/disturbance formulation is also possible.

Combining equations (4),(5) and (7) we arrive at the equation describing the whole Hammerstein system

$$y(t) + \sum_{i=1}^M c_i L_i(q, p) y(t) = \beta_0 \sum_{i=1}^m w_i \phi_i(u(t-d)) + e_1(t) \quad (8)$$

Assuming that $\underline{w}_j = \beta_0 w_j, i=1 \dots m$, the model output from the Hammerstein system can be finally given as

$$\hat{y}(t) = -\sum_{i=1}^M c_i L_i(q, p) y(t) + \sum_{j=1}^m \underline{w}_j \phi_j(t-d) \quad (9)$$

which can be presented in the linear regression form

$$\hat{y}(t) = \boldsymbol{\varphi}^T(t) \boldsymbol{\theta} \quad (10)$$

where $\boldsymbol{\varphi}^T(t) = [-v_1(t) \dots -v_M(t) \ \phi_1(t-d) \ \phi_2(t-d) \dots \phi_m(t-d)]$, $\boldsymbol{\theta} = [c_1 \dots c_M \ w_1 \ w_2 \dots w_m]$ and $v_i(t) = L_i(q, p)y(t)$. Unknown parameters $\boldsymbol{\theta}$ of the model can be estimated by the familiar recursive least squares (RLS) or least mean squares (LMS) algorithms.

3.2 Wiener system

In a single-input single-output Wiener system, a linear dynamic part is cascaded with a nonlinear static element. The output $\hat{y}(t)$ of the Wiener model, or the system output predictor, can be calculated as

$$\hat{y}(t) = \hat{f}[\hat{G}(q)u(t)] \quad (11)$$

Since a nonlinear static characteristic is invertible we can rewrite equation (11) in form

$$\hat{f}^{-1}[\hat{y}(t)] = \hat{G}(q)u(t) \quad (12)$$

The function $\hat{f}^{-1}[\hat{y}(t)]$ can be approximated with RBF network. Finally, we arrive at the linear regression function

$$\hat{y}(t) = \sum_{i=1}^M c_i L_i(q^{-1})u(t) - \sum_{i=1}^m \underline{w}_i \phi_i(y(t)) \quad (13)$$

where $\underline{w}_i = w_i - \alpha_i$ ($i=1, \dots, m$), which can be presented in the familiar form $\hat{y}(t) = \boldsymbol{\varphi}^T(t) \boldsymbol{\theta}$, with $\boldsymbol{\varphi}^T(t) = [v_1(t) \dots -v_M(t) \ -\phi_1(y(t)) \ -\phi_2(y(t)) \dots -\phi_m(y(t))]$, $\boldsymbol{\theta} = [c_1 \dots c_M \ \underline{w}_1 \ \underline{w}_2 \dots \underline{w}_m]$ and $v_i(t) = L_i(q, p)u(t)$, $i=1, \dots, M$.

3.3 Feedback-nonlinear system

In the block-oriented feedback-nonlinear system, the output of the linear dynamic part is fed (negatively) back to the input through the static nonlinearity, so that the whole system can be described by the equation

$$\begin{aligned} y(t) &= G(q)[u(t) - f(y(t)) + e_f(t)] \\ &= G(q)[u(t) - x(t) + e_f(t)] \end{aligned} \quad (14)$$

where $e_f(t)$ is the error/disturbance term. Combining equations (4),(5) and (14) we arrive at the equation describing the whole, IOBF-related feedback-nonlinear system (Stanisławski et al., 2007)

$$y(t) + \sum_{i=1}^M c_i L_i(q, p)y(t) = \beta_0 \left[u(t-d) - \sum_{j=1}^m \underline{w}_j \phi_j(y(t-d)) \right] + e(t) \quad (15)$$

Putting $\underline{w}_j = \beta_0 w_j$, $j=1 \dots m$, the output from the feedback-nonlinear system can be finally given as

$$y(t)=\beta_0u(t-d)-\sum_{i=1}^Mc_iL_i(q,p)y(t)-\sum_{j=1}^m\underline{w}_j\phi_j(y(t-d))+e(t)$$

(16)

The equation (16) can be presented in the linear regression form, with $\boldsymbol{\varphi}^T(t)=[u(t-d) \text{ } -v_1(t) \text{ } \dots \text{ } -v_M(t) \text{ } -\phi_1(y(t-d)) \text{ } -\phi_2(y(t-d))\dots \text{ } -\phi_m(y(t-d))]$, $\boldsymbol{\theta}=[\beta_0 \text{ } c_1 \text{ } \dots \text{ } c_M \text{ } \underline{w}_1 \text{ } \underline{w}_2 \text{ } \dots \text{ } \underline{w}_m]$ and $v_i(t)=L_i(q,p)y(t)$. Clearly, owing to the IOBF modeling approach applied, the linear and nonlinear submodels are separated from each other so that the bilinearity issue is eliminated here.

4. Simlation experiments

In the Matlab/Simulink environment, we comparatively analyze the three presented nonlinear block-oriented OBF/RBFN-related models consisting of 1) Hammerstein IOBF related model, 2) Wiener regular OBF related model and 3) feedback-nonlinear IOBF related model. For example, consider the magnetic levitation process which has been simulated as a demo in the Matlab/Simulink environment. Our main goal is to analyze efficiency of the approach in view of their possible use in on-line identification (and control). Performance of parameter estimation is evaluated by means of the mean square prediction error (MSPE). MSPE is described by the equation

$$MSPE=(1/N)\sum_{t=1}^N(y(t)-\hat{y}(t))^2$$

(17)

The system is excited by a random number generator with regular distribution $\langle 0.5, 4 \rangle$. Additionally, the system is corrupted with the input and output noises ($e_i(t)$ and $e_o(t)$), which are supplied from a Gaussian random number generators with $N(0, \delta_i)$ and $N(0, \delta_o)$, respectively. For estimation of weights of the RBFs and parameters of the dynamical model we use a classical RLS algorithm. Table 1 specifies the results of a comparative analysis of the performance of the three models for $M=6$ and $m=9$.

δ_i	δ_o	Hammerstein system	Wiener system	Feedback-nonlinear system
0	0	8.851 e-6	0.2437	1.008 e-5
0.005	0	2.167 e-5	1.123	9.236 e-5
0.01	0	4.337 e-5	1.287	9.582 e-5
0	0.005	2.752	2.231	2.838
0	0.01	5.188	3.226	4.95
0.005	0.005	2.921	3.406	2.792

Table 1. MSPE of the Hammerstein, Wiener and feedback-nonlinear models

The results in Table 1 show that the high accuracy of identification has been obtained for the IOBF/RBFN-based models (Hammerstein and feedback-nonlinear models). The reasons are 1) the specific, structure of the IOBF-related model, 2) numerical conditioning of the covariance matrix for the IOBF-based estimation problem is essentially better than that for the OBF-based one. However, the inconvenience of IOBF-related models is the high sensitivity on the output error due to the equation error structure. Table 1 shows that the Wiener model cannot provide sufficiently high accuracy of the identification problem, causing that the RBF network in the Wiener system models the inversion of the nonlinear function $f(.)$. The calculation of the original function on the basis of RBF network is ambiguous and badly numerical conditioned. Finally, only the Wiener model gives the satisfy results for the system corrupted with the high-level disturbances.

Plots of the actual output and its reconstruction by Hammerstein, Wiener and Feedback nonlinear models presented in Fig. 1 and Fig. 2 confirm very good performance of identification for Hammerstein and Feedback nonlinear models and poor performance for Wiener model, respectively.

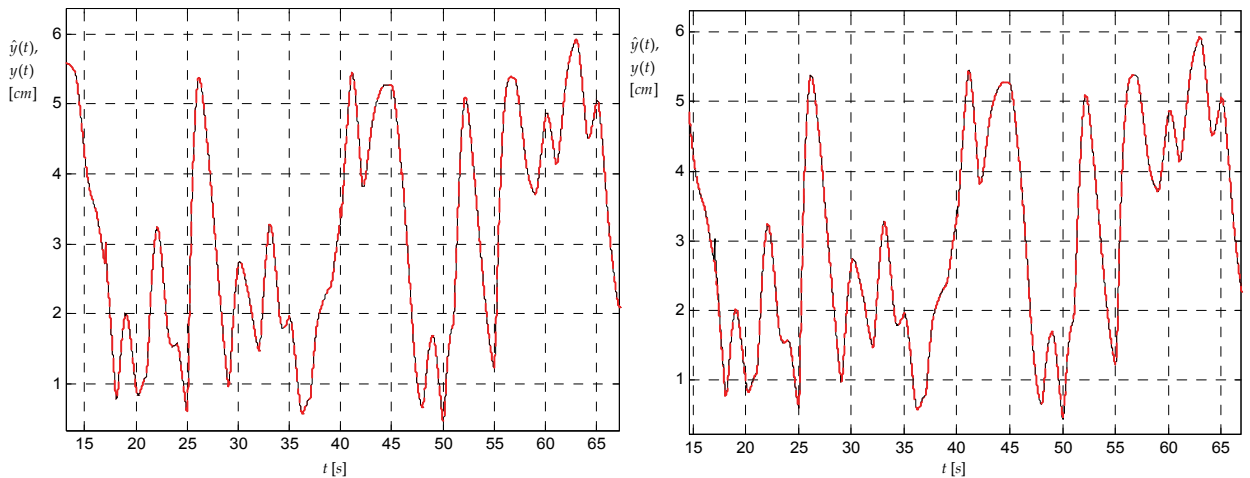


Fig. 1. Plots of actual (solid-black) vs. predicted (dashed-red) outputs of the Hammerstein system (left) and feedback-nonlinear system (right)

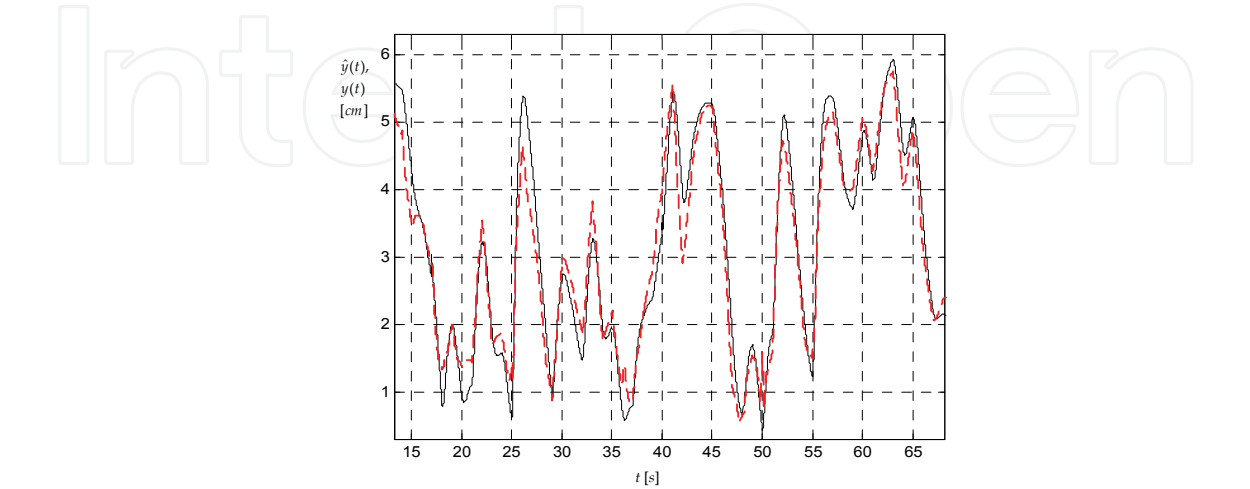


Fig. 2. Plots of actual (solid-black) vs. predicted (dashed-red) outputs of the Wiener system

7. Conclusion

The paper has presented the solutions to the nonlinear identification problem for the various nonlinear block-oriented systems using OBF-related models and RBF network. We have demonstrated that the Wiener model based on regular OBF modeling concept cannot provide sufficiently high performance of the identification problem. This is mainly due with inversion problem of RBF network.

Results of a simulation analysis have shown that the strategy using the IOBF modeling concept in Hammerstein and feedback-nonlinear model can provide a very good performance, both in terms of low prediction errors and accurate reconstruction of the nonlinear characteristics, in addition to high computational efficiency.

8. References

- Bai E.W. (1998). An optimal two-stage identification algorithm for Hammerstein-Wiener nonlinear systems. *Automatica*, Vol. 34, pp. 333-338.
- Bokor J., Heuberger P., Ninness, B., Oliveira e Silva, T., Van den Hof P. & Wahlberg, B. (1999). Modelling and identification with orthogonal basis functions. *Proc. Preconference Workshop, 14th IFAC World Congress*, Beijing, P.R. China.
- Boukis C., Mandic D.P., Constantinides A.G. & Polymenakos L.C. (2006). A Novel Algorithm for the Adaptation of the Pole of Laguerre Filters. *IEEE Signal Processing Letters*, Vol. 13, No. 7, pp. 429 - 432.
- Greblicki W. (1989). Nonparametric orthogonal series identification of Hammerstein systems. *International Journal of Systems Science*, Vol. 20, No. 12, pp. 2355-2367.
- Gómez J.C. & Baeyens E. (2004). Identification of block-oriented nonlinear systems using orthonormal bases. *Journal of Process Control*, Vol. 14, No. 6, pp. 685-697
- Hachino T., Deguchi K. & Takata H. (2004). Identification of Hammerstein model using radial basis function networks and genetic algorithm. *Proc. 5th Asian Control Conference*, Vol. 1, pp. 124-129.
- Kim N.Y., Byun H.G. & Kwon K.H. (2006). Learning Behaviors of Stochastic Gradient Radial Basis Function Network Algorithms for Odor Sensing Systems. *ETRI journal*, Vol. 28, No. 1.
- Latawiec K.J. (2004) *The Power of Inverse Systems in Modeling and Control of Linear and Nonlinear Systems*. Vol. 167, Opole University of Technology Press, Opole, Poland.
- Latawiec K.J., Marciak C., Hunek W. & Stanisławski R. (2003) A new analytical design methodology for adaptive control of nonlinear block-oriented systems. *Proc. 7th World Multi-Conference on Systemics, Cybernetics and Informatics*, Vol. XI, pp. 215-220, Orlando, Florida, USA.
- Latawiec K.J., Marciak C. & Oliveira G.H.C.: (2006). A new control-oriented modeling methodology for a series DC motor. *Electromagnetic Fields in Mechatronics, Electrical and Electronic Engineering*, Wiak S., Krawczyk A. & Fernandez X.L.M. (Eds.), IOS Press, *Studies in Applied Electromagnetics and Mechanics*, Vol. 27, Chapter_B_13.
- Latawiec K.J., Marciak C., Rojek R. & Oliveira G.H.C. (2003). Linear parameter estimation and predictive constrained control of Wiener/Hammerstein systems. *Proc. 13th IFAC Symposium on System Identification*, pp. 359-364, Rotterdam, The Netherlands.

- Latawiec K.J., Marciak C., Stanisławski R. & Oliveira G.H.C. (2004) The mode separability principle in modeling of linear and nonlinear block-oriented systems. *Proc. the 10th IEEE MMAR Conference (MMAR'04)*, Vol. 1, pp. 479-484, Miedzyzdroje, Poland.
- Oliveira S.T. (2000). Optimal pole conditions for Laguerre and two-parameter Kautz models: a survey of known results. *Proc. 12th IFAC Symp. on System Identification (SYSID'2000)*, pp. 457-462, Santa Barbara, CA, USA.
- Pearson R.K. & Pottman M. (2000). Gray-box identification of block-oriented nonlinear models. *Journal of Process Control*, Vol. 10, pp. 301-315.
- Stanisławski R., Latawiec K.J. & Stanisławski W. (2006). Modeling of a boiler proper using a complex structure model by means of multivariable orthonormal basis functions. *Proc. 12th IEEE MMAR Conference (MMAR'06)*, pp. 935-938, Miedzyzdroje, Poland.
- Stanisławski R. (2007). Hammerstein system identification by means of orthonormal basis functions and radial basis functions. *Emerging Technologies, Robotics and Control Systems*, Pennacchio S. (Eds.), Internationalsar, Vol. 2, pp. 69-73, Palermo, Italy.
- Stanisławski R., Latawiec K.J. & Hunek W.P. (2007). Identification of feedback-nonlinear systems by means of orthonormal basis and radial basis functions. *Proc. 13th IEEE IFAC IC MMAR 2007*, pp. 611-616, August 2007, Szczecin, Poland.

IntechOpen



Automation and Robotics

Edited by Juan Manuel Ramos Arreguin

ISBN 978-3-902613-41-7

Hard cover, 388 pages

Publisher I-Tech Education and Publishing

Published online 01, May, 2008

Published in print edition May, 2008

In this book, a set of relevant, updated and selected papers in the field of automation and robotics are presented. These papers describe projects where topics of artificial intelligence, modeling and simulation process, target tracking algorithms, kinematic constraints of the closed loops, non-linear control, are used in advanced and recent research.

How to reference

In order to correctly reference this scholarly work, feel free to copy and paste the following:

Rafal Stanislawski and Krzysztof J. Latawiec (2008). Orthonormal Basis and Radial Basis Functions in Modeling and Identification of Nonlinear Block-Oriented Systems, Automation and Robotics, Juan Manuel Ramos Arreguin (Ed.), ISBN: 978-3-902613-41-7, InTech, Available from:
http://www.intechopen.com/books/automation_and_robotics/orthonormal_basis_and_radial_basis_functions_in_modeling_and_identification_of_nonlinear_block-oriented_systems

INTECH
open science | open minds

InTech Europe

University Campus STeP Ri
Slavka Krautzeka 83/A
51000 Rijeka, Croatia
Phone: +385 (51) 770 447
Fax: +385 (51) 686 166
www.intechopen.com

InTech China

Unit 405, Office Block, Hotel Equatorial Shanghai
No.65, Yan An Road (West), Shanghai, 200040, China
中国上海市延安西路65号上海国际贵都大饭店办公楼405单元
Phone: +86-21-62489820
Fax: +86-21-62489821

© 2008 The Author(s). Licensee IntechOpen. This chapter is distributed under the terms of the [Creative Commons Attribution-NonCommercial-ShareAlike-3.0 License](https://creativecommons.org/licenses/by-nc-sa/3.0/), which permits use, distribution and reproduction for non-commercial purposes, provided the original is properly cited and derivative works building on this content are distributed under the same license.

IntechOpen

IntechOpen