

# We are IntechOpen, the world's leading publisher of Open Access books Built by scientists, for scientists

6,900

Open access books available

186,000

International authors and editors

200M

Downloads

Our authors are among the

154

Countries delivered to

TOP 1%

most cited scientists

12.2%

Contributors from top 500 universities



WEB OF SCIENCE™

Selection of our books indexed in the Book Citation Index  
in Web of Science™ Core Collection (BKCI)

Interested in publishing with us?  
Contact [book.department@intechopen.com](mailto:book.department@intechopen.com)

Numbers displayed above are based on latest data collected.  
For more information visit [www.intechopen.com](http://www.intechopen.com)



---

# Syngas Production Using Natural Gas from the Environmental Point of View

---

Karina Tamião de Campos Roseno,  
Rita M. de B. Alves, Reinaldo Giudici and  
Martin Schmal

Additional information is available at the end of the chapter

<http://dx.doi.org/10.5772/intechopen.74605>

---

## Abstract

The search for clean and low-cost fuels as alternative for petroleum is a popular research focus in the energy field. The demand of natural gas as an energy source has increased steadily. The high H:C ratio and the absence of heteroatoms make natural gas an attractive feedstock for synthetic fuels and chemicals that can replace those that are typically petroleum-derived. The search for efficient routes to convert methane to other higher added-value products is a challenge for the scientific community. In addition, new fields of oil and gas contain associated CO<sub>2</sub> (8–18%), and, in some specific fields, the associated gas encloses a higher CO<sub>2</sub> content (79%). In this context, the tri-reforming process combines two of the most problematic greenhouse gases (CH<sub>4</sub> and CO<sub>2</sub>) to generate syngas for the synthesis of clean liquid fuels and valuable chemicals. Developments in tri-reforming processes, which include the new catalysts, are presented in this chapter.

**Keywords:** tri-reforming, syngas, catalysts, carbon dioxide, hydrogen production

---

## 1. Introduction

Significant efforts are being directed nowadays towards finding alternatives that could restrain the climate change. The consistent rise of CO<sub>2</sub> concentration in the atmosphere is known to be significantly detrimental to the environment. Thus, mitigating CO<sub>2</sub> is becoming an urgent need.

Current methods involving CO<sub>2</sub> mitigation can be broadly divided into two major categories, which involve (1) CO<sub>2</sub> capture and sequestration (CCS) and (2) CO<sub>2</sub> capture and utilization (CCU). Since the production of fuels/chemicals is an added feature along with mitigation in

---

CO<sub>2</sub> valorization-based methods, they could be economically favorable. An energy-intensive CO<sub>2</sub> capture step is a common drawback of most CO<sub>2</sub> valorization methods that aim to mitigate CO<sub>2</sub> from major CO<sub>2</sub> emission sources (such as industrial flue gases).

Different methane-rich gas streams can be found, both of natural and of anthropogenic origin. A decrease in fossil fuels and environmental concerns across the globe enforced researchers to work on energy resources like methane, which is the most abundant natural gas on earth [1].

Therefore, it is of utmost importance to seek for technologies that could convert two of the main product gases responsible for the greenhouse effect, methane and carbon dioxide, avoiding their massive release into the atmosphere.

Reforming of methane is one of the most important industrial processes, which convert natural gas into synthesis gas. Syngas is an intermediate feedstock for the production of hydrocarbons and hydrogen for fuel cells. Synthesis gas is produced from natural gas via catalytic processes based on dry reforming of methane (DRM), steam reforming of methane (SRM) and partial oxidation of methane (POM) [2]. In fact, the available natural gas can be exploited for the production of chemicals and fuels.

The reforming processes are classified based on the energetic demand of the process and the type of reforming agent. Steam reforming of methane (SRM) produces a high ratio of syngas ( $H_2/CO = 3$ ), suitable for the production of ammonia. This process is endothermic and requires high investments. The partial oxidation of methane, an exothermic reaction, is an alternative process with reduced capital and operation costs. However, the partial oxidation of methane (POM) needs oxygen, and the cost of its production is about 50% of the investment of the whole process. There is a high risk of explosion at an elevated temperature [3]. On the other hand, the dry reforming of methane (DRM) is a valuable reaction for biogas utilization and transformation of greenhouse gases (CH<sub>4</sub> and CO<sub>2</sub>) in high-valued products. DRM produces a low syngas ratio ( $H_2/CO = 1$ ), which is suitable for the syntheses of oxygenates [4–6].

Tri-reforming of methane (TRM) is nowadays of great interest, because it combines the steam and dry reforming and partial oxidation of methane (CH<sub>4</sub> + O<sub>2</sub> + CO<sub>2</sub> + H<sub>2</sub>O) processes; however, it holds the main advantages and disadvantages of all processes, to some extent [7].





It is well known that the major limitation of methane-reforming processes is the rapid deactivation of the catalyst, which has been commonly attributed to coke deposition and catalyst sintering.

The tri-reforming of methane may drastically reduce the carbon deposition. Furthermore, the presence of O<sub>2</sub> in the feed allows the generation of energy in situ, due to the exothermal oxidation of methane, which increases the energy efficiency of the process. Besides, the possibility of changing the reactants' compositions, allows for a versatile synthesis of gas composition, which can be suitable for different applications of synthesis gas [8, 9].




## 2. Tri-reforming process

Energy is the most important issue to modern economies, and it is predicted that a fast-rising energy demand will require US \$45 trillion for new infrastructure investment by 2030.

In particular, natural gas processes increase the options for the production of high added-value chemicals and energy demand. The Fischer-Tropsch (FT) technology is the main technology for the production of liquid fuels, named GTL process, but this technology is yet very expensive, due to the high costs of syngas production using steam reforming of methane (SRM) [7]. The tri-reforming process (TRM), introduced by Song et al. [10], allows to use flue gas and methane to produce syngas, which can be converted to methanol and higher hydrocarbons. This new process is a synergic combination of the endothermic CO<sub>2</sub> and steam-reforming reactions with the exothermic oxidation of methane, as shown in Eqs. (1)–(4) [11], which are carried out in a single reactor.




In addition, during the tri-reforming process, methane cracking (Eq. (5)), CO disproportionation or Boudouard (Eq. (6)), water-gas shift (Eq. (7)) and complete oxidation of carbon reactions (Eq. (8)) occur simultaneously [12].



The heat released during the POM reaction is used to supply the heat needed for the SRM and DRM reaction, and therefore the TRM reaction is energetically more efficient [13]. In addition, TRM offers several advantages for syngas production compared to the single reactions [14]. TRM does not require pure CO<sub>2</sub> supply in the reaction. This implies that the flue gas from the combustion processes of power plants or the coke oven gas (COG) from iron-making industries can be used directly as a CO<sub>2</sub> source for TRM process [15–17]. TRM can also be used to upgrade the syngas quality produced from biomass or coal gasification [18, 19]. The H<sub>2</sub>/CO ratio in syngas produced from tri-reforming can be adjusted varying the amounts of reactants to satisfy the requirement for further processes, such as methanol and Fischer-Tropsch synthesis [20, 21]. In addition, integrating steam reforming and partial oxidation with CO<sub>2</sub> reforming could dramatically reduce or eliminate carbon formation on a reforming catalyst, thus increasing the catalyst life and process efficiency [14] due to the addition of O<sub>2</sub> in the feed, which also generates heat that increases the energy efficiency. Therefore, the tri-reforming has the advantage of using natural gas and flue gases from power plants. The syngas from tri-reforming is used for the production of chemicals (such as MeOH and dimethyl ether by oxo-synthesis), fuels (for the Fischer-Tropsch synthesis) and electricity in fuel cells, as shown in **Figure 1** [14].

**Table 1** shows the advantages and disadvantages of tri-reforming compared to other reforming technologies [7, 18, 22].

However, due to the inherent problems of the reforming processes, there is a need to improve catalysts for optimizing the TRM process, improving the oxygen tolerance, resistance to coke formation and sintering of the metal-active sites at a high temperature.

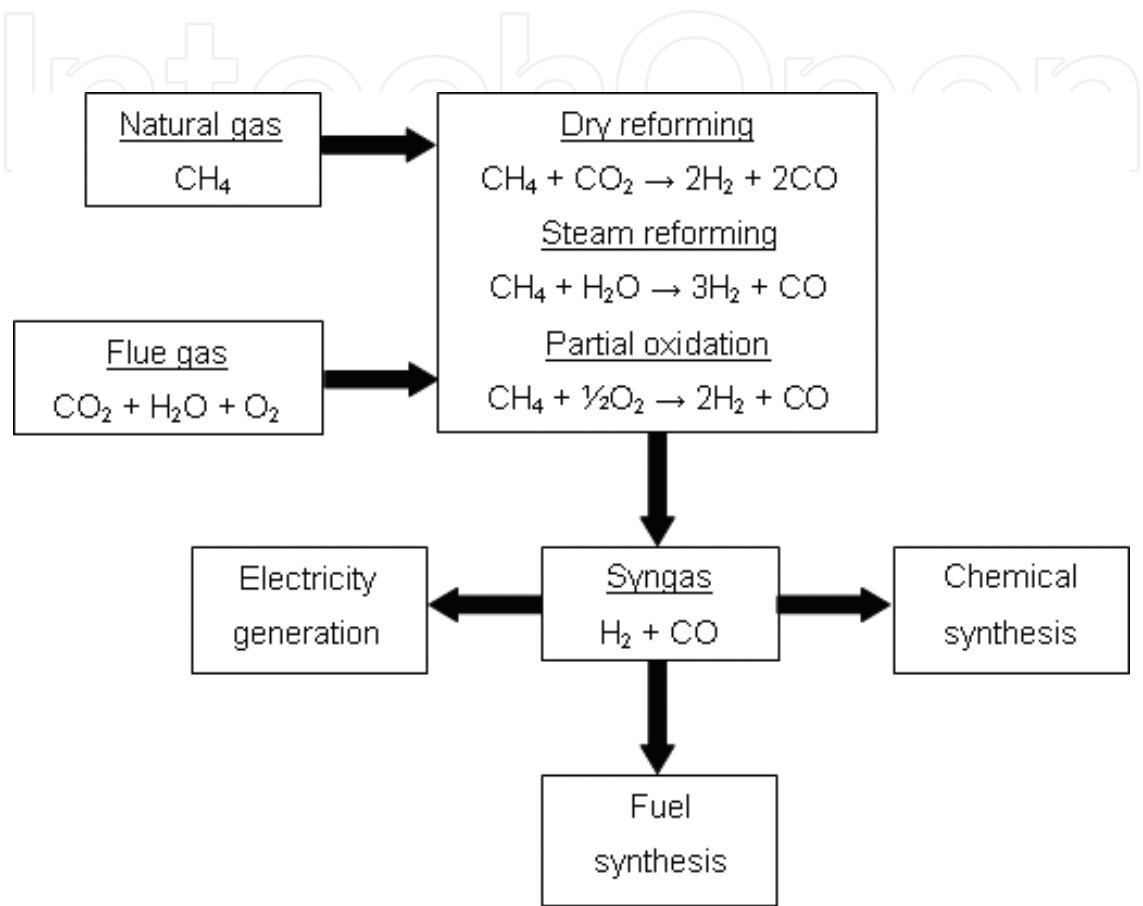

**Figure 1.** Tri-reforming of natural gas using flue gas from fossil fuel-based power plants.

Advantages	Disadvantages
Direct use of flue gases	Usually requires oxygen plant
High methane conversion	No existing industrial process
Elimination of CO <sub>2</sub> separation	No existing commercial catalysts
Different H <sub>2</sub> /CO ratios	Would require high GHSV
Minimization of coke formation	Heat management
Use of waste H <sub>2</sub> O/O <sub>2</sub>	Mass management
Simplifying the processing system	

**Table 1.** Advantages and disadvantages of tri-reforming [7, 18, 22].

### 3. Catalysts for methane-reforming reactions

The drawback of methane-reforming processes is mainly the severe tendency to carbon formation that deactivates the catalysts [23–25]. Noble metal-based catalysts (Rh, Ru, Pt, Pd and Ir) presented a high activity and stability against coke formation [26, 27]. However, their costs are still highly prohibitive for feasible application in this process. In fact, nickel-based catalysts are more preferable in the CH<sub>4</sub> reforming, due to their availability and lower costs [28–30]. However, the stability of the nickel catalysts at elevated temperatures and the coke formation are the main obstacles for industrial applications [31, 32].

The addition of promoters to Ni-containing catalysts led to the reduction of coke deposition, better metal dispersion or smaller particle size, and the synergic effect between Ni and the promoter [33–36]. In fact, bimetallic catalyst exhibits a higher activity compared to noble metals but not totally eliminate the carbon deposition.

The metal dispersion influences the coke deposition, since this process is structure-sensitive. The build-up of carbon involves quite large active metal particles, which are usually formed at high reforming temperatures.

Alumina-based supports have been investigated mainly due to the high specific surface area, increasing the metal dispersion [37]. Nevertheless, the alumina supports easily deactivate due to the coke deposition and sintering. The formation of coke has been associated with the dehydration, cracking and polymerization reactions, occurring on the acid sites, while sintering is due to the transition of crystalline phase during reaction [37].

Additional improvement can be achieved using well-developed supports. An effort to overcome these problems is to search for basic additives or promoters, such as CeO<sub>2</sub>, SiO<sub>2</sub>, La<sub>2</sub>O<sub>3</sub>, BaO, CaO, SrO, MgO and ZrO<sub>2</sub> [37, 38].

Sintering of metal clusters can be prevented with supports having a strong interaction with the active component. In fact, ceria-based catalysts can minimize sintering and coke formation [39] compared to MgO, TiO<sub>2</sub>, Al<sub>2</sub>O<sub>3</sub>, SiO<sub>2</sub> and ZrO<sub>2</sub> supports [40–46]. On the contrary, these supports facilitate sintering when submitted to higher temperatures. Moreover, ceria-based catalysts present good redox properties and high oxygen mobility, and as reported in the study, without noticeable oxygen mobility, the deactivation of the catalyst occurs very fast [47]. On the other hand, the thermal stability of pure ceria under the typical reforming conditions is quite poor.

#### 3.1. Promising catalysts

Although tri-reforming has not yet been implemented commercially, similar to steam or to dry reforming, Ni catalysts supported on a wide range of different supported materials, such as Al<sub>2</sub>O<sub>3</sub>, ZrO<sub>2</sub>, MgO, TiO<sub>2</sub>, CeO<sub>2</sub>, TiO<sub>2</sub>, CeZrO and SiO<sub>2</sub>, are the most popular catalysts for tri-reforming of methane [48].

Song et al. [14] suggested that the supports should have a high oxygen storage capacity that promotes CO<sub>2</sub> adsorption. They proposed a simplified mechanism for the CO<sub>2</sub> reforming



reaction. The first step occurs with the activation of methane, followed by the surface reaction and the adsorbed surface  $\text{CO}_2$  species or adsorbed oxygen atoms (Eq. (9));  $\text{CO}_2$  is more acidic, and basic supports may preferentially interact with  $\text{CO}_2$ . Therefore, the  $\text{CO}_2$  adsorption at the surface facilitates the reaction with  $\text{CH}_4$  producing  $\text{CO}$  and  $\text{H}_2$ . Moreover, supports with a high oxygen storage capacity may also facilitate the dissociative adsorption of  $\text{CO}_2$  into  $\text{CO}$  and adsorbed oxygen, according to Eq. (9) [14]



where  $\square$  denotes an active site.

Perovskite-type oxides have attracted significant interest as promising catalytic materials with applications in a wide range of reactions, including total oxidation and partial oxidation of hydrocarbons, carbon monoxide oxidation, alkenes hydrogenation, alkanes hydrogenolysis, alcohol synthesis, dry reforming and water-gas shift reaction [49–51]. The perovskites contain metallic and non-metallic elements, with a well-defined crystal structure. In general, the molecular formula is represented by  $\text{ABO}_3$ , where A refers to an alkali metal, an alkaline earth metal or a lanthanide and B to a transition metal. These solids exhibit interesting properties such as superconductivity, ferromagnetism, appreciable thermal stability and conductivity and finally a high catalytic activity. The intrinsic properties of each perovskite are dependent on the type of inserted element and principally on the preparation method. In fact, perovskites as catalysts showed a reductive capacity under appropriate conditions. The metal particles are highly dispersed in the oxide matrix ( $\text{AO}_x$ ), inhibiting sintering of metal particles and carbon deposition. In fact, the high thermal stability makes the perovskites promising catalysts for the reforming of methane. Therefore, they are attractive alternatives to classic catalysts traditionally used in these reactions such as supported nickel and noble metals.

Various perovskites, including  $\text{LaFeO}_3$ ,  $\text{LaNi}_x\text{Fe}_{1-x}\text{O}_3$ ,  $\text{LaNiO}_3$  or  $\text{La}_{1-x}\text{Ce}_x\text{Fe}_{0.7}\text{Ni}_{0.3}\text{O}_3$ , have been found to exhibit a high activity in the steam reforming of methane with a minimal coke deposition under low steam-to-carbon ratios [52–67]. However, the need for high-operating temperatures (e.g.  $T \geq 600^\circ\text{C}$ ) of methane-reforming reactions provokes irreversible structural changes, including structural collapse and dissolution of (reactive or inactive) metal particles from the perovskite lattice [57–60, 63, 64].

Choudhary et al. [63] verified that the oxygen from the  $\text{La}_{1-x}\text{Sr}_x\text{FeO}_3$  perovskite-type oxides surface was responsible for the complete oxidation of  $\text{CH}_4$ – $\text{CO}_2$  and  $\text{H}_2\text{O}$ , while the bulk lattice oxygen was responsible for the deep reduction of  $\text{Fe}^{3+}$ – $\text{Fe}^{2+}$ , and this was suitable for the partial oxidation of  $\text{CH}_4$ – $\text{H}_2$  and  $\text{CO}$ . The  $\text{La}_{1-x}\text{Sr}_x\text{FeO}_3$  has had good repeatability in the catalytic performance, and no significant deactivation was observed over five redox cycles.

The  $\text{LaCrO}_3$  and  $\text{LaFeO}_3$  oxides doped with alkaline earth (AE = Ba, Ca, Mg and Sr) metals were prepared and studied on how the atomic oxygen influences the partial oxidation of methane to syngas [66]. A-site doping with AE metals generally increases the mobility of lattice oxygen ions and thus decreases the temperature for the hydrogen and  $\text{CO}$  production, when compared with the non-doped  $\text{LaCrO}_3$  and  $\text{LaFeO}_3$  oxides. There are minor structural changes during the partial oxidation of methane of  $\text{LaCrO}_3$ , which can be regenerated by

oxidation at 950°C. However, the  $\text{LaFeO}_3$  presented negligible structural modifications. The stability of the perovskites occurs during repeated reaction cycles of generation-regeneration.

The  $\text{LaFeO}_3$ ,  $\text{La}_{0.8}\text{Sr}_{0.2}\text{FeO}_3$  and  $\text{La}_{0.8}\text{Sr}_{0.2}\text{Fe}_{0.9}\text{Co}_{0.1}\text{O}_3$  perovskite-type oxides were investigated in a continuous flow and sequential redox reaction [67] for the partial oxidation of methane in the absence of gaseous oxygen. The authors observed that methane reacted with sub-surface oxygen species of perovskite oxides in the absence of gaseous oxygen. The sequential redox reaction revealed that the structural stability is attributed to the continuous oxygen supply in the redox reaction, which evidences an excellent structural stability of the perovskite materials.

Other perovskites were employed for the DRM, SRM and POM reactions [68–72]. The effect of replacing cobalt by iron in  $\text{LaCo}_{1-x}\text{Fe}_x\text{O}_3$  ( $x = 0.0, 0.5$  and  $1.0$ ) perovskite-type oxides over its physical properties and catalytic performance in the partial oxidation of methane (POM) was investigated. The product distribution varying with space time and with perovskite-type catalyst employed is found to be remarkable. For lower W/F values, the major product was  $\text{H}_2$  for the  $\text{LaCoO}_3$  (55.8%) and  $\text{LaCo}_{0.5}\text{Fe}_{0.5}\text{O}_3$  (59.2%), with similar ratios  $\text{H}_2/\text{CO}$  (1.8–1.9) and a low  $\text{CO}_2$  formation [73].

We studied the combined dry and partial oxidation reaction on  $\text{LaCrO}_3$  and perovskites, fed with  $\text{CH}_4:\text{CO}_2:\text{O}_2 = 1:1:0.5$  and using a GSVH  $60,000 \text{ h}^{-1}$  at 700°C for 4 h. The conversions were 17%  $\text{CH}_4$  and 94%  $\text{O}_2$ , respectively, and no conversion of  $\text{CO}_2$ . Results showed an increasing formation of  $\text{CO}_2$  and a  $\text{H}_2/\text{CO}$  ratio equal to 2.7, which suggests that the partial and total oxidation of methane initially takes place, producing  $\text{CO}$ ,  $\text{CO}_2$  and  $\text{H}_2\text{O}$ , and subsequently the steam and dry reforming occur to produce syngas. In fact, the water-gas shift reaction also takes place due to the high  $\text{H}_2:\text{CO}$  ratio.

### 3.2. Effect of $\text{O}_2$ and $\text{H}_2\text{O}$ concentration

Steam reforming of methane is the only large-scale industrial process currently available for the production of synthesis gas, producing high-purity hydrogen with a  $\text{H}_2/\text{CO}$  ratio equal to 3. The partial oxidation of methane produces synthesis gas with a  $\text{H}_2/\text{CO}$  ratio of 2, as required for methanol synthesis. However, the POM reaction is exothermic, and the control of the temperature of this process is difficult. Tri-reforming of methane is energetically favorable compared to the steam reforming of methane and partial oxidation of methane. The process is energetically thermal neutral. Compared to the SRM and POM reactions, the tri-reforming process has the advantage to produce different  $\text{H}_2/\text{CO}$  ratios.

Singha et al. [74] found the optimum feed ratio and the effect of  $\text{O}_2$  and  $\text{H}_2\text{O}$  concentration (mole ratio) conditions for the reaction, by monitoring the feed mixture and keeping the methane to  $\text{CO}_2$  mole ratio constant. The addition of oxygen in the feed helps to attain a thermal-neutral balance and compensate the heat necessary for the endothermic reactions occurring during the whole process [75]. A high oxygen concentration in the reaction feed inhibits the  $\text{CO}_2$  reforming and lowers the  $\text{CO}_2$  conversion [13] because the reaction between oxygen and methane is thermodynamically favored over the reaction between methane and  $\text{CO}_2$ . The higher concentration of oxygen in the feed allows a maximum methane consumption, and the available methane for the dry and steam reforming is very low [76]. **Table 2** shows the effect of  $\text{O}_2$  concentration



Catalyst	GHSV (ml.g <sup>-1</sup> .h <sup>-1</sup> )	Feed ratio, O <sub>2</sub> :CO <sub>2</sub> :H <sub>2</sub> O:CH <sub>4</sub> :He	CH <sub>4</sub> conv. (%)	CO <sub>2</sub> conv. (%)	H <sub>2</sub> O conv. (%)	H <sub>2</sub> /CO ratio
4.8NiZrO <sub>2</sub>	80,000	0.75:1:2.1:5:18	60	50	55	2.3
		1:1:2.1:5:18	83	81	82	2.0
		1.25:1:2.1:5:18	90	38	89	3.0

**Table 2.** The effect of O<sub>2</sub> concentration (mole ratio) on the reactant conversions verified by reference [74].

over methane, CO<sub>2</sub> and H<sub>2</sub>O conversions and H<sub>2</sub>/CO ratios [74]. The effect of concentration of O<sub>2</sub> over the reactant conversion was mainly due to the heat generated by the partial oxidation and complete oxidation of methane and the enhanced coke removal process [76, 77]. Increasing O<sub>2</sub> concentration, the total oxidation of methane also increases, due to the exothermic reaction, and the amount of energy is released. The heat generated is useful for the steam- and dry-reforming reactions, which are endothermic, minimizing the required temperature to obtain a higher CH<sub>4</sub> conversion [78] and external energy. On the opposite, lower O<sub>2</sub> concentrations led to lower conversion; however, increasing the temperature, H<sub>2</sub>O and CO<sub>2</sub> react with methane to produce synthesis gas [77]. The higher H<sub>2</sub>/CO ratio was attributed to the steam reforming of methane, producing a H<sub>2</sub>/CO ratio of 3, attributed to the water-gas shift reaction, which produces only hydrogen, without the production of CO [79]. On the other hand, with increasing temperature, one observes that the RWGS (reverse water-gas shift) reaction outweighs other reactions [77].

### 3.3. Effect of space velocity and methane/oxygen ratio

The effect of replacing cobalt by iron in LaCo<sub>1-x</sub>Fe<sub>x</sub>O<sub>3</sub> (x = 0.0, 0.5 and 1.0) perovskite-type oxides on its catalytic performance in the partial oxidation of methane (POM) process was investigated, varying the space velocity and methane/oxygen ratio. The inlet methane to oxygen proportion was fixed at 2:1. The methane conversion increased with the space time and the maximum conversion was 31% at 0.67 kg.s.mol<sup>-1</sup> for the LF perovskite. In terms of product selectivity, the catalysts produced mainly H<sub>2</sub> and CO, CO<sub>2</sub>, C<sub>2</sub>H<sub>4</sub> and/or C<sub>2</sub>H<sub>6</sub>, as shown in **Table 3**. The product distribution varying with space time and perovskite type catalyst is found to be remarkable. The H<sub>2</sub> production decreased by about a half and the CO decreased four times for both LC and LCF catalysts. However, the CO<sub>2</sub> formation increased by a factor of about 10, and the H<sub>2</sub>/CO ratio also increased by a factor of 2. Different was the product distribution of the LF perovskite presenting low H<sub>2</sub> and CO formations and a high production of CO<sub>2</sub>, but a significant higher formation of C<sub>2</sub> hydrocarbons compared to the other samples as W/F increases [73].

Catalytic tests with the LF and LCF perovskites were also performed with a methane/oxygen ratio of 4 (W/F = 0.67 kg.s.mol<sup>-1</sup>). **Table 4** shows that increasing the CH<sub>4</sub>/O<sub>2</sub> ratio to 4, the methane conversion was halved, compared to the previous condition at a CH<sub>4</sub>/O<sub>2</sub> ratio of 2 [73].

The formations of ethane and ethylene are attributed to secondary reactions. In particular, the oxidative coupling of methane reaction takes place, which increased the C<sub>2</sub>H<sub>4</sub> and C<sub>2</sub>H<sub>6</sub> to C<sub>2</sub>H<sub>4</sub> at high temperatures (2CH<sub>4</sub> + 1/2O<sub>2</sub> → H<sub>2</sub>O + 1/2C<sub>2</sub>H<sub>6</sub>). Parallel reactions of oxidative or non-oxidative dehydrogenation of ethane would occur, converting also C<sub>2</sub>H<sub>6</sub> to C<sub>2</sub>H<sub>4</sub> and then

W/F (kg.s.mol <sup>-1</sup> )	Catalysts	X CH <sub>4</sub> (%)	H <sub>2</sub> /CO	Selectivity (%)			
				H <sub>2</sub>	CO	C2	CO <sub>2</sub>
0.16	LC	13.7	1.8	55.8	31.5	5.50	7.10
	LF	19.2	1.6	46.0	28.0	4.10	22.0
	LCF	17.1	1.9	59.2	30.9	3.80	6.10
0.40	LC	22.0	2.8	22.2	7.90	1.50	68.4
	LF	28.1	2.2	16.6	7.50	3.10	72.8
	LCF	27.7	3.2	20.5	6.50	0.90	70.2
0.67	LC	28.6	3.5	25.7	7.30	0.70	66.3
	LF	31.0	3.2	8.30	2.60	5.30	83.8
	LCF	28.7	4.4	22.2	5.10	0.80	72.0

**Table 3.** Conversions and selectivity results over perovskites. Experimental conditions: P = 1 atm, inlet molar CH<sub>4</sub>/O<sub>2</sub> ratio = 2/1, space time of reactants = 0.16, 0.40 and 0.67 kg s mol<sup>-1</sup> and temperature of 700°C [73].

CH <sub>4</sub> :O <sub>2</sub>	Catalysts	X CH <sub>4</sub> (%)	H <sub>2</sub> /CO	Selectivity (%)			
				H <sub>2</sub>	CO	C2	CO <sub>2</sub>
2	LF	31.0	3.2	8.30	2.60	5.30	83.8
	LCF	28.7	4.4	22.2	5.10	0.80	72.0
4	LF	15.5	0.0	0	2.70	10.5	86.8
	LCF	15.5	2.0	5.00	3.60	0.80	90.6

**Table 4.** Conversions and selectivities over LF and LCF perovskites. Experimental conditions: P = 1 atm, inlet molar CH<sub>4</sub>/O<sub>2</sub> ratio = 2/1 and 4/1, space time of reactants = 0.67 kg s mol<sup>-1</sup>, and temperature of 700°C [73].

ethane could be oxidized to CO<sub>2</sub>. This last hypothesis is reinforced due to the increasing CO<sub>2</sub> concentration at higher temperatures, most likely due to the oxidation of part of C<sub>2</sub>H<sub>6</sub> (which leads to H<sub>2</sub>O and CO<sub>2</sub>), according to the following reactions, suggesting different reaction paths: C<sub>2</sub>H<sub>6</sub> + 1/2O<sub>2</sub> → C<sub>2</sub>H<sub>4</sub> + H<sub>2</sub>O and C<sub>2</sub>H<sub>6</sub> → C<sub>2</sub>H<sub>4</sub>+ H<sub>2</sub>.

## 4. Discussion

Different reactions may occur in the whole process; the formation of the desired product with maximum selectivity depends on the input feed mixture. Steam increases the methane reforming and the water-gas shift (Eq. (7)) (WGS) reaction. It also helps to reduce the carbon deposition, which occurs during the dry reforming of methane [75]. Therefore, the addition of H<sub>2</sub>O is thermodynamically more favorable for the methane reforming than for the dry reforming [13]. For a lower H<sub>2</sub>O concentration, the methane conversion was lower than the CO<sub>2</sub> conversion, which is assigned to the competition between H<sub>2</sub>O and CO<sub>2</sub> molecules with methane. Increasing the H<sub>2</sub>O concentration input, the CO<sub>2</sub> conversion decreases. Both WGS and steam reforming are equally important at a temperature below 650°C; however, with

increasing temperature, the  $H_2O$  conversion increases. Above  $650^\circ C$ , the RWGS reaction prevailed, producing less  $H_2$  and decreasing the  $H_2/CO$  ratio [77, 80].

The reaction mechanisms are yet unknown for oxide catalysts and in particular for perovskite structures, which apparently are the most promising catalysts for the tri-reforming, based on the combined SRM, DRM and POM reactions. One explanation is that these materials present defects which promote the modification of electronic effects. Indeed, electronic effects may arise in the presence of ions with different charges of those belonging to the ions of the network, or as a consequence of the transition energy levels of electrons normally filled (usually the valence band) to empty levels (the conduction band). In all cases, when an electron is missing, that is, when there is an electron deficiency, this is usually called electronic holes. In the absence of an electric field, the ionic networks of the oxide structures tend to be electronically neutral, which requires that charge defects are compensated by the presence of other filler defects in order to obtain the condition of electro-neutrality, making the structure more stable. This means that charge defects are always present as a combination of two or more types of failures [55].

A reaction mechanism on mixed oxides can be suggested, assuming that  $CH_4$  is activated by the metal at the surface, forming carbon and  $H_2$ . The carbon atoms adsorbed at the surface can react directly with oxygen, forming  $CO$  and  $H_2$ . These intermediate species may react with the adsorbed  $CO_2$  species or dissociated steam. Song et al. [14] claim that the different extent of interaction between  $CO_2$  and catalysts could be responsible for this mechanism. They assumed that the interaction between  $CO_2$  and the catalyst could change the  $CH_4$  conversion rate, based on a simplified Langmuir-Hinshelwood (L-H) mechanism (Eqs. (10)–(12)).



where  $\square$  are the metallic surface sites.

They observed that the reaction order of  $CH_4$  on Ni/MgO is strongly compared to the adsorption of  $CO_2$  over Ni/MgO/CeZrO which is close to zero. This suggests that the  $CH_4$  conversion rate almost does not change with the partial pressure of  $CO_2$ . However, it was found that Ni/MgO/CeZrO has even more stronger interaction with  $CO_2$  than Ni/MgO. In fact, the sites for a strong  $CO_2$  adsorption over Ni/MgO/CeZrO are probably not the same as for  $CH_4$  adsorption. It is important to note that the metal is itself believed to be able to activate  $CH_4$ , as suggested by Rostrup-Nielsen [47], while the types of supports, like MgO, facilitate the adsorption of  $CO_2$ . Hence, the locations of the interfaces between Ni and supports are fundamental, where the adsorption and reaction take place.

## 5. Conclusion

The energy crisis is a problem which will get exacerbated with depleting crude oil reserves around the world. There is an urgent need for alternative fuels around the world. The conversion

of CO<sub>2</sub> to a high-valued product could provide the necessary economic incentive towards both CO<sub>2</sub> mitigation and fuel generation. The study reported new strategies of CO<sub>2</sub> valorization. The tri-reforming produces directly synthesis gas from flue gases using methane as a co-feed. The utilization of CO<sub>2</sub> without pre-separation from its sources saves energy, since a substantial energy input is required for CO<sub>2</sub> separation from its concentrated sources [81]. Tri-reforming of methane can be carried out by using CO<sub>2</sub>, H<sub>2</sub>O and O<sub>2</sub> as a co-feed with natural gas or methane, and flue gas can be a very good source of highly concentrated feed for the tri-reforming process. New catalysts have been suggested with suitable promoters, mixed oxides and different supports, resistant to coke formation and sintering of the metal-active sites and stable at an elevated temperature. Stable and active catalysts for industrial application are under development, and researches are expected to bridge the gaps in science and technology for the tri-reforming process, providing further improvements and economically feasible.

## Acknowledgements

The authors would like to thank FAPESP and Shell for supporting the “Research Centre for Gas Innovation—RCGI” (FAPESP Proc. 2014/50279-4), hosted by the University of São Paulo.

## Author details

Karina Tamião de Campos Roseno\*, Rita M. de B. Alves, Reinaldo Giudici and Martin Schmal

\*Address all correspondence to: ktamiao@gmail.com

Department of Chemical Engineering of Polytechnic School, University of São Paulo, São Paulo, SP, Brazil

## References

- [1] Zhu Q, Zhao X, Deng Y. Advances in the partial oxidation of methane to synthesis gas. *Journal of Natural Gas Chemistry*. 2004;**13**:191-203
- [2] Hanbo Z, Shengzhou C, Jiangnan H, Zhaohui Z. Effect of impregnation sequence on the catalytic performance of NiMo carbides for the tri-reforming of methane. *International Journal of Hydrogen Energy*. 2017;**42**:20401-20409. DOI: 10.1016/j.ijhydene.2017.06.203
- [3] Kleinert A, Feldhoff A, Schiestel T, Caro J. Novel hollow fibre membrane reactor for the partial oxidation of methane. *Catalysis Today*. 2016;**118**:44-51. DOI: 10.1016/j.cattod.2005.11.097
- [4] Kohn MP, Castaldi MJ, Farrauto RJ. Biogas reforming for syngas production: The effect of methylchloride. *Applied Catalysis. B, Environmental*. 2014;**144**:353-361. DOI: 10.1016/j.apcatb.2013.07.031

- [5] Fraenkel D, Levitan R, Levy M. A solar thermochemical pipe based on the CO<sub>2</sub>/CH<sub>4</sub> (1,1) system. *International Journal of Hydrogen Energy*. 1986;**11**:267-277
- [6] Usman M, Wan Daud WMA, Abbas HF. Dry reforming of methane: Influence of process parameters - a review. *Renewable and Sustainable Energy Reviews*. 2015;**45**:710-744. DOI: 10.1016/j.rser.2015.02.026
- [7] Amin MH, Patel J, Sage V, Lee WJ, Periasamy S, Dumbre D, Mozammel T, Prasad VVDN, Samanta C, Bhargava SK. Tri-reforming of methane for the production of syngas: Review on the process, catalysts and kinetic mechanism. In: *Proceedings of the 6th Asian Pacific Confederation of Chemical Congress (APCCChE 2015)*; 27 September-1 October 2015; Melbourne. Australia: incorporating (CHEMECA 2015); p. 128-136
- [8] Jun KW, Roh HS, Kim KS, Ryu JS, Lee KW. Catalytic investigation for Fischer-Tropsch synthesis from biomass derived syngas. *Applied Catalysis A*. 2004;**259**:221-226. DOI: 10.1016/j.apcata.2003.09.034
- [9] García-Vargas JM, Valverde JL, Dorado F, Sánchez P. Influence of the support on the catalytic behavior of Ni catalysts for the dry reforming reaction and tri-reforming processes. *Journal of Molecular Catalysis A*. 2014;**395**:108-116. DOI: 10.1016/j.molcata.2014.08.019
- [10] Song C. Tri-reforming: A new process concept for effective conversion and utilization of CO<sub>2</sub> in flue gas from electric power plants. *American Chemical Society Division of Fuel Chemistry*. 2000;**45**(4):772-776
- [11] Amin MH, Newnham J, Bhargava SK. The Effect of lanthanide promotion on catalytic performance of sol-gel Ni/Al<sub>2</sub>O<sub>3</sub> catalysts in the dry reforming of methane. In: Rose A. editor. *Proceedings of Chemeca 2011*. 18-21 September 2011; Sydney. Australia: (Chemeca 2011); p. 1-3
- [12] Song C, Pan W, Srimat ST. Tri-reforming of natural gas using CO<sub>2</sub> in flue gas of Power Plants without CO<sub>2</sub> pre-separation for production of synthesis gas with desired H<sub>2</sub>/CO ratios. In: Maroto-Valer MM, Song C, Soong Y, editors. *Environmental Challenges and Greenhouse Gas Control for Fossil Fuel Utilization in the 21st Century*. New York: Springer Science Business Media, LLC; 2002. pp. 247-267
- [13] Solovev SA, Kurilets Y, Orlik SN. Tri-reforming of methane on structured Ni-containing catalysts. *Theoretical and Experimental Chemistry*. 2012;**48**:199-205
- [14] Song C, Pan W. Tri-reforming of methane: A novel concept for catalytic production of industrially useful synthesis gas with desired H<sub>2</sub>/CO ratios. *Catalysis Today*. 2004;**98**:463-484. DOI: 10.1016/j.cattod.2004.09.054
- [15] Qian Y, Man Y, Peng L, Zhou H. Integrated process of coke-oven gas tri-reforming and coal gasification to methanol with high carbon utilization and energy efficiency. *Industrial and Engineering Chemistry Research*. 2015;**54**:2519-2525. DOI: 10.1021/ie503670d
- [16] Minutillo M, Perna A. A novel approach for treatment of CO<sub>2</sub> from fossil fired power plants, part a: The integrated systems ITRPP. *International Journal of Hydrogen Energy*. 2009;**34**:4014-4020. DOI: 10.1016/j.ijhydene.2009.02.069



- [17] Halmann M, Steinfeld A. Fuel saving, carbon dioxide emission avoidance, and syngas production by tri-reforming of flue gases from coal- and gas-fired power stations, and by the carbothermic reduction of iron oxide. *Energy*. 2006;**31**:3171-3185. DOI: 10.1016/j.energy.2006.03.009
- [18] Halmann M, Steinfeld A. Hydrogen production and CO<sub>2</sub> fixation by flue-gas treatment using methane tri-reforming or coke/coal gasification combined with lime carbonation. *International Journal of Hydrogen Energy*. 2009;**34**:8061-8066. DOI: 10.1016/j.ijhydene.2009.08.031
- [19] Antonio V, Lidia P, Cipiti F, Lagana M, Recupero V. Biogas as renewable rawmaterial for syngas production by tri-reforming process over NiCeO<sub>2</sub> catalysts: Optimal operative condition and effect of nickel content. *Fuel Processing Technology*. 2014;**127**:47-58. DOI: 10.1016/j.fuproc.2014.06.014
- [20] Yang J, Ma W, Chen D, Holmen A, Davis BH. Fischer-Tropsch synthesis: A review of the effect of CO conversion on methane selectivity. *Applied Catalysis A*. 2014;**470**:250-260. DOI: 10.1016/j.apcata.2013.10.061
- [21] Dry ME. The Fischer-Tropsch process: 1950-2000. *Catalysis Today*. 2002;**71**:227-241. DOI: 10.1016/S0920-5861(01)00453-9
- [22] Minutillo M, Perna A. A novel approach for treatment of CO<sub>2</sub> from fossil fired power plants. Part B: The energy suitability of integrated tri-reforming power plants (ITRPPs) for methanol production. *International Journal of Hydrogen Energy*. 2010;**35**:7012-7020. DOI: 10.1016/j.ijhydene.2010.04.091
- [23] Sharifi M, Haghighi M, Abdollahifar M. Hydrogen production via reforming of biogas over nanostructured Ni/Y catalyst: Effect of ultrasound irradiation and Ni-content on catalyst properties and performance. *Materials Research Bulletin*. 2014;**60**:328-340. DOI: 10.1016/j.materresbull.2014.07.027
- [24] Sajjadi SM, Haghighi M, Rahmani F. Sol-gel synthesis of Ni-CO/Al<sub>2</sub>O<sub>3</sub>-MgO-ZrO<sub>2</sub> nanocatalyst used in hydrogen production via reforming of CH<sub>4</sub>/CO<sub>2</sub> greenhouse gases. *Journal of Natural Gas Science and Engineering*. 2015;**22**:9-21. DOI: 10.1016/j.jngse.2014.11.014
- [25] Sajjadi SM, Haghighi M, Rahmani F. Dry reforming of greenhouse gases CH<sub>4</sub>/CO<sub>2</sub> over MgO-promoted Ni-CO/Al<sub>2</sub>O<sub>3</sub>-ZrO<sub>2</sub> nanocatalyst: Effect of MgO addition via sol-gel method on catalytic properties and hydrogen yield. *Journal of Sol-Gel Science and Technology*. 2014;**70**:111-124. DOI: 10.1007/s10971-014-3280-1
- [26] Rezaei M, Alav SM, Sahebdehfar S, Yan Z-F. Syngas production by methane reforming with carbon dioxide on noble metal catalysts. *Journal of Natural Gas Chemistry*. 2006;**15**: 327-334
- [27] Xu L, Song H, Chou L. Ordered mesoporous MgO-Al<sub>2</sub>O<sub>3</sub> composite oxides supported Ni based catalysts for CO<sub>2</sub> reforming of CH<sub>4</sub>: Effects of basic modifier and mesopore structure. *International Journal of Hydrogen Energy*. 2013;**38**:7307-7325. DOI: 10.1016/j.ijhydene.2013.04.034

- [28] Al-Fatesh ASA, Fakeeha AH, Abasaeed AE. Effects of selected promoters on Ni/Y-Al<sub>2</sub>O<sub>3</sub> catalyst performance in methane dry reforming. *Chinese Journal of Catalysis*. 2011;**32**: 1604-1609. DOI: 10.1016/S1872-2067(10)60267-7
- [29] Paturzo L, Gallucci F, Basile A, Vitulli G, Pertici PA. Ru-based catalytic membrane reactor for dry reforming of methane-its catalytic performance compared with tubular packed bed reactors. *Catalysis Today*. 2003;**82**:57-65. DOI: 10.1016/S0920-5861(03)00202-5
- [30] Yokota S, Okumura K, Niwa M. Support effect of metal oxide on Rh catalysts in the CH<sub>4</sub>-CO<sub>2</sub> reforming reaction. *Catalysis Letters*. 2002;**84**:131-134
- [31] Guo J, Lou H, Zhao H, Chai D, Zheng X. Dry reforming of methane over nickel catalysts supported on magnesium aluminate spinels. *Applied Catalysis A*. 2004;**273**:75-82. DOI: 10.1016/j.apcata.2004.06.014
- [32] Chen X, Honda K, Zhang Z-G. CO<sub>2</sub>-CH<sub>4</sub> reforming over NiO/ $\gamma$ -Al<sub>2</sub>O<sub>3</sub> in fixed-bed/-fluidized-bed switching mode. *Catalysis Today*. 2004;**93-95**:87-93. DOI: 10.1016/j.cattod.2004.06.015
- [33] Djinojic' P, Osojnik Crnivec IG, Erjavec B, Pintar A. Influence of active metal loading and oxygen mobility on coke-free dry reforming of Ni-Co bimetallic catalysts. *Applied Catalysis. B, Environmental*. 2012;**125**:259-270. DOI: 10.1016/j.apcatb.2012.05.049
- [34] Djinojic' P, Osojnik Crnivec IG, Batista J, Levec J, Pintar A. Catalytic syngas production from greenhouse gasses: Performance comparison of Ru-Al<sub>2</sub>O<sub>3</sub> and Rh-CeO<sub>2</sub> catalysts. *Chemical Engineering and Processing*. 2011;**50**:1054-1062. DOI: 10.1016/j.cep.2011.05.018
- [35] Fan M-S, Abdullah AZ, Bhatia S. Utilization of green house gases through carbon dioxide reforming of methane over Ni-Co/MgO-ZrO<sub>2</sub>: Preparation, characterization and activity studies. *Applied Catalysis. B, Environmental*. 2010;**100**:365-377. DOI: 10.1016/j.apcatb.2010.08.013
- [36] Rui Z, Feng D, Chen H, Ji H. Anodic TiO<sub>2</sub> nanotube array supported nickel-noble metal bimetallic catalysts for activation of CH<sub>4</sub> and CO<sub>2</sub> to syngas. *International Journal of Hydrogen Energy*. 2014;**39**:16252-16261. DOI: 10.1016/j.ijhydene.2013.10.150
- [37] Bereketidou OA, Goula MA. Biogas reforming for syngas production over nickel supported on ceria-alumina catalysts. *Catalysis Today Special Issue Catal Biorefinery*. 2012;**195**:93-100. DOI: 10.1016/j.cattod.2012.07.006
- [38] de Sousa HSA, da Silva AN, Castro AJR, Campos A, Filho JM, Oliveira AC. Mesoporous catalysts for dry reforming of methane: Correlation between structure and deactivation behaviour of Ni-containing catalysts. *International Journal of Hydrogen Energy*. 2012;**37**: 12281-12291. DOI: 10.1016/j.ijhydene.2012.05.151
- [39] Sutthisripok W, Sattayanurak S, Sikong L. Effect of specific surface area on oxygen storage capacity (OSC) and methane steam reforming reactivity of CeO<sub>2</sub>. *Journal of Porous Materials*. 2008;**15**:519-525. DOI: 10.1007/s10934-007-9107-5

- [40] Mateos-Pedrero C, González-Carrazán SR, Soria MA, Ruíz P. Effect of the nature of TiO<sub>2</sub> support over the performances of Rh/TiO<sub>2</sub> catalysts in the partial oxidation of methane. *Catalysis Today*. 2013;**203**:158-162. DOI: 10.1016/j.cattod.2012.02.039
- [41] Lago R, Bini G, Peña MA, Fierro JLG. Partial oxidation of methane to synthesis gas using LnCoO<sub>3</sub> perovskites as catalyst precursors. *Journal of Catalysis*. 1997;**167**:198-209
- [42] Eriksson S, Rojas S, Boutonnet M, Fierro JLG. Effect of Ce-doping on Rh/ZrO<sub>2</sub> catalysts for partial oxidation of methane. *Applied Catalysis A*. 2007;**326**:8-16. DOI: 10.1016/j.apcata.2007.03.019
- [43] Karelovic A, García X, Wojcieszak R, Ruiz P, Gordon AL. Insight on the promoting effect of Zr and Ti on the catalytic properties of Rh/SiO<sub>2</sub> for partial oxidation of methane. *Applied Catalysis A*. 2010;**384**:220-229. DOI: 10.1016/j.apcata.2010.06.040
- [44] Yang E, Kim NY, Noh Y, Lim SS, Jung J-S, Lee JS, Hong GH, Moon DJ. Steam CO<sub>2</sub> reforming of methane over La<sub>1-x</sub>Ce<sub>x</sub>NiO<sub>3</sub> perovskite catalysts. *International Journal of Hydrogen Energy*. 2015;**40**:11831-11839
- [45] Meng B, Zhang H, Zhao Z, Wang X, Jin Y, Liu S. A novel LaGa<sub>0.65</sub>Mg<sub>0.15</sub>Ni<sub>0.20</sub>O<sub>3-δ</sub> perovskite catalyst with high performance for the partial oxidation of methane to syngas. *Catalysis Today*. 2016;**259**:388-392. DOI: 10.1016/j.cattod.2015.05.009
- [46] Paksoy AI, Caglayan BS, Aksoylu AE. A study on characterization and methane dry reforming performance of co-Ce/ZrO<sub>2</sub> catalyst. *Applied Catalysis. B, Environmental*. 2015;**168-169**:164-174. DOI: 10.1016/j.apcatb.2014.12.038
- [47] Wei J, Iglesia E. Isotopic and kinetic assessment of the mechanism of reactions of CH<sub>4</sub> with CO<sub>2</sub> or H<sub>2</sub>O to form synthesis gas and carbon on nickel catalysts. *Journal of Catalysis*. 2004;**224**:370-383. DOI: 10.1016/j.jcat.2004.02.032
- [48] Ferri D, Forni L. Methane combustion on some perovskite-like mixed oxides. *Applied Catalysis. B, Environmental*. 1998;**16**:119-126
- [49] Thalinger R, Gocyla M, Heggen M, Dunin-Borkowski R, Grünbacher M, Stöger-Pollach M, Schmidmair D, Klötzer B, Penner S. Ni-perovskite interaction and its structural and catalytic consequences in methane steam reforming and methanation reactions. *Journal of Catalysis*. 2016;**337**:26-35. DOI: 10.1016/j.jcat.2016.01.020
- [50] Pena MA, Fierro JLG. Chemical structures and performance of perovskite oxides. *Chemical Reviews*. 2001;**101**:1981-2018. DOI: 10.1021/cr980129f
- [51] Royer S, Duprez D, Can F, Courtois X, Bstiot-Dupeyrat C, Lassiri S, Alamdari H. Perovskites as substitutes of noble metals for heterogeneous catalysis: Dream or reality. *Chemical Reviews*. 2014;**114**:10292-10368. DOI: 10.1021/cr500032a
- [52] Fierro JLG. Hydrogenation of carbon oxides over perovskite-type oxides. *Catalysis Reviews: Science and Engineering*. 1992;**34**:321-336. DOI: 10.1080/01614949208016315

- [53] Seiyama T. Total oxidation of hydrocarbons on perovskite oxides. *Catalysis Reviews: Science and Engineering*. 1992;**34**:281-300. DOI: 10.1080/01614949208016313
- [54] Ichimura K, Inoue Y, Yasumori I. Hydrogenation and hydrogenolysis of hydrocarbons on perovskite oxides. *Catalysis Reviews: Science and Engineering*. 1992;**34**:301-320. DOI: 10.1080/01614949208016314
- [55] Villoria J-A, Mota N, Al-Sayari SA, Alvarez-Galvan M-C, Navarro R-M, Fierro JLG. Perovskites as catalysts in the reforming of hydrocarbons: A review. *Micro Nanosystems*. 2012;**4**:231-252. DOI: 10.2174/1876402911204030231
- [56] Ulla MA, Migone RA, Petunchi JO, Lombardo EA. Surface chemistry and catalytic activity of  $\text{La}_{1-y}\text{M}_y\text{CoO}_3$  perovskite (M=Sr or Th): 2. Hydrogenation of  $\text{CO}_2$ . *Journal of Catalysis*. 1987;**105**:107-119. DOI: 10.1016/0021-9517(87)90012-1
- [57] Choi S, Moon S. Performance of  $\text{La}_{1-x}\text{Ce}_x\text{Fe}_{0.7}\text{Ni}_{0.3}\text{O}_3$  perovskite catalysts for methane steam reforming. *Catalysis Today*. 2009;**146**:148-153. DOI: 10.1016/j.cattod.2009.02.023
- [58] Provendier H, Petit C, Kiennemann A. Steam reforming of methane on  $\text{LaNi}_x\text{Fe}_{1-x}\text{O}_3$  ( $0 \leq x \leq 1$ ) perovskites. Reactivity and characterisation after test. *Academie des Sciences—Series IIC*. 2001;**4**:57-66. DOI: 10.1016/S1387-1609(00)01212-3
- [59] Provendier H, Petit C, Estournes C, Libs S, Kiennemann A. Stabilisation of active nickel catalysts in partial oxidation of methane to synthesis gas by iron addition. *Applied Catalysis A*. 1999;**180**:163-171. DOI: 10.1016/S0926-860X(98)00343-3
- [60] Provendier H, Petit C, Estournes C, Kiennemann A. Dry reforming of methane. Interest of la-Ni-Fe solid solutions compared to  $\text{LaNiO}_3$  and  $\text{LaFeO}_3$ . *Studies in Surface Science and Catalysis*. 1998;**119**:741-746. DOI: 10.1016/S0167-2991(98)80520-X
- [61] Gao J, Jia L, Fang W, Li Q, Song H. Methanation of carbon dioxide over the  $\text{LaNiO}_3$  perovskite catalysts activated under the reactant stream. *Journal of Fuel Chemistry and Technology*. 2009;**37**:573-577. DOI: 10.1016/S1872-5813(10)60008-4
- [62] Wang H, Fang Y, Liu Y, Bai X. Perovskite  $\text{LaFeO}_3$  supported bi-metal catalyst for syngas methanation. *Journal of Natural Gas Chemistry*. 2012;**21**:745-752. DOI: 10.1016/S1003-9953(11)60427-1
- [63] Choudhary VR, Uphade BS, Behelkar AA. Oxidative conversion of methane to syngas over  $\text{LaNiO}_3$  perovskite with or without simultaneous steam and  $\text{CO}_2$  reforming reactions: Influence of partial substitution of la and Ni. *Journal of Catalysis*. 1996;**163**:312-318. DOI: 10.1006/jcat.1996.0332
- [64] Urasaki K, Sekine Y, Kawabe S, Kikuchi E, Matsukata M. Catalytic activities and coking resistance of Ni/perovskites in steam reforming of methane. *Applied Catalysis A*. 2005;**286**:23-29. DOI: 10.1016/j.apcata.2005.02.020
- [65] Zhao K, He F, Huang Z, Zheng A, Li H, Zhao Z.  $\text{La}_{1-x}\text{Sr}_x\text{FeO}_3$  perovskites as oxygen carriers for the partial oxidation of methane to syngas. *Chinese Journal of Catalysis*. 2014;**35**:1196-1205. DOI: 10.1016/S1872-2067(14)60084-X



- [66] Khine MSS, Chen L, Zhang S, Lin J, Jiang SP. Syngas production by catalytic partial oxidation of methane over  $(\text{La}_{0.7}\text{A}_{0.3})\text{BO}_3$  ( $\text{A} = \text{Ba, Ca, Mg, Sr, and B} = \text{Cr or Fe}$ ) perovskite oxides for portable fuel cell applications. *International Journal of Hydrogen Energy*. 2013; **38**:13300-13308. DOI: 10.1016/j.ijhydene.2013.07.097
- [67] Dai X, Yu C, Wu Q. Comparison of  $\text{LaFeO}_3$ ,  $\text{La}_{0.8}\text{Sr}_{0.2}\text{FeO}_3$ , and  $\text{La}_{0.8}\text{Sr}_{0.2}\text{Fe}_{0.9}\text{Co}_{0.1}\text{O}_3$  perovskite oxides as oxygen carrier for partial oxidation of methane. *Journal of Natural Gas Chemistry*. 2008; **17**:415-418. DOI: 10.1016/S1003-9953(09)60019-0
- [68] Mota N, Ismagilov IZ, Matus EV, Kuznetsov VV, Kerzhentsev MA, Ismagilov ZR, Navarro RM, JLG F. Hydrogen production by autothermal reforming of methane over lanthanum chromites modified with Ru and Sr. *International Journal of Hydrogen Energy*. 2016; **41**:19373-19381. DOI: 10.1016/j.ijhydene.2016.05.029
- [69] Nguyen TH, Łamacz A, Krzton A, Liszka B, Djéga-Mariadassou G. Partial oxidation of methane over  $\text{Ni}^0/\text{La}_2\text{O}_3$  bifunctional catalyst III. Steady state activity of methane total oxidation, dry reforming, steam reforming and partial oxidation. Sequences of elementary steps. *Applied Catalysis. B, Environmental*. 2016; **182**:385-391. DOI: 10.1016/j.apcatb.2015.09.016
- [70] Zhu Q, Cheng H, Zou X, Lu X, Xu Q, Zhou Z. Synthesis, characterization, and catalytic performance of  $\text{La}_{0.6}\text{Sr}_{0.4}\text{Ni}_x\text{Co}_{1-x}\text{O}_3$  perovskite catalysts in dry reforming of coke oven gas. *Chinese Journal of Catalysis*. 2015; **36**:915-924. DOI: 10.1016/S1872-2067(14)60303-X
- [71] Yang E, Noh Y, Ramesh S, Lim SS, Moon DJ. The effect of promoters in  $\text{La}_{0.9}\text{M}_{0.1}\text{Ni}_{0.5}\text{Fe}_{0.5}\text{O}_3$  ( $\text{M} = \text{Sr, Ca}$ ) perovskite catalysts on dry reforming of methane. *Fuel Processing Technology*. 2015; **134**:404-413. DOI: 10.1016/j.fuproc.2015.02.023
- [72] Zhao K, He F, Huang Z, Wei G, Zheng A, Li H, Zhao Z. Perovskite-type oxides  $\text{LaFe}_{1-x}\text{Co}_x\text{O}_3$  for chemical looping steam methane reforming to syngas and hydrogen co-production. *Applied Energy*. 2016; **168**:193-203. DOI: 10.1016/j.apenergy.2016.01.052
- [73] Roseno KTC, Brackmann R, da Silva MA, Schmal M. Investigation of  $\text{LaCoO}_3$ ,  $\text{LaFeO}_3$  and  $\text{LaCo}_{0.5}\text{Fe}_{0.5}\text{O}_3$  perovskites as catalyst precursors for syngas production by partial oxidation of methane. *International Journal of Hydrogen Energy* 2016; **41**:18178-18192. DOI: 10.1016/j.ijhydene.2016.07.207
- [74] Singha RK, Shukla A, Yadav A, Adak S, Iqbal Z, Siddiqui N, Bal R. Energy efficient methane tri-reforming for synthesis gas production over highly coke resistant nanocrystalline  $\text{Ni-ZrO}_2$  catalyst. *Applied Energy*. 2016; **178**:110-125. DOI: 10.1016/j.apenergy.2016.06.043
- [75] Pino L, Vita A, Cipiti F, Laganà M, Recupero V. Hydrogen production by methane tri-reforming process over Ni-ceria catalysts: Effect of La-doping. *Applied Catalysis. B, Environmental*. 2011; **104**:64-73. DOI: 10.1016/j.apcatb.2011.02.027
- [76] Djaidja A, Libs S, Kiennemann A, Barama A. Characterization and activity in dryreforming of methane on  $\text{NiMg/Al}$  and  $\text{Ni/MgO}$  catalysts. *Catalysis Today*. 2006; **113**: 194-200. DOI: 10.1016/j.cattod.2005.11.066



- [77] Zhang Y, Zhang S, Gossage JL, Lou HH, Benson TJ. Thermodynamic analyses of tri-reforming reactions to produce syngas. *Energy & Fuels*. 2014;**28**:2717-2726. DOI: 10.1021/ef500084m
- [78] Majewski AJ, Wood J. Tri-reforming of methane over Ni@SiO<sub>2</sub> catalyst. *International Journal of Hydrogen Energy*. 2014;**39**:12578-12585. DOI: 10.1016/j.ijhydene.2014.06.071
- [79] Ashcroft AT, Cheetham AK, Green MLH, Vernon PDF. Partial oxidation of methane to synthesis gas using carbon dioxide. *Nature*. 1991;**352**:225-226. DOI: 10.1038/352225a0
- [80] Hafizi A, Rahimpour MR, Hassanajili S. Hydrogen production via chemical looping steam methane reforming process: Effect of cerium and calcium promoters on the performance of Fe<sub>2</sub>O<sub>3</sub>/Al<sub>2</sub>O<sub>3</sub> oxygen carrier. *Applied Energy*. 2016;**165**:685-694. DOI: 10.1016/j.apenergy.2015.12.100
- [81] Weimer T, Schaber K, Specht M, Bandi A. Comparison of CO<sub>2</sub>-sources for fuel synthesis. *American Chemical Society Division of Fuel Chemistry*. 1996;**41**(4):1337-1340