

# We are IntechOpen, the world's leading publisher of Open Access books Built by scientists, for scientists

6,900

Open access books available

186,000

International authors and editors

200M

Downloads

Our authors are among the

154

Countries delivered to

TOP 1%

most cited scientists

12.2%

Contributors from top 500 universities



WEB OF SCIENCE™

Selection of our books indexed in the Book Citation Index  
in Web of Science™ Core Collection (BKCI)

Interested in publishing with us?  
Contact [book.department@intechopen.com](mailto:book.department@intechopen.com)

Numbers displayed above are based on latest data collected.  
For more information visit [www.intechopen.com](http://www.intechopen.com)



## Steady State Compressible Fluid Flow in Porous Media

Peter Ohirhian

*University of Benin, Petroleum Engineering Department  
Benin City, Nigeria*

### Introduction

Darcy showed by experimentation in 1856 that the volumetric flow rate through a porous sand pack was proportional to the flow rate through the pack. That is:

$$\frac{dp}{d\ell_p} = K' Q = K' v \quad (\text{i})$$

(Nutting, 1930) suggested that the proportionality constant in the Darcy law ( $K'$ ) should be replaced by another constant that depended only on the fluid property. That constant he called permeability. Thus Darcy law became:

$$\frac{dp}{d\ell_p} = \frac{k v}{\mu} \quad (\text{ii})$$

Later researches, for example (Vibert, 1939) and (LeRosen, 1942) observed that the Darcy law was restricted to laminar (viscous) flow.

(Muskat, 1949) among other later researchers suggested that the pressure in the Darcy law should be replaced with a potential ( $\Phi$ ). The potential suggested by Muskat is:

$$\Phi = p \pm \rho g z$$

Then Darcy law became:

$$-\frac{dp}{d\ell_p} = \frac{k v}{\mu} \pm \rho g \quad (\text{iii})$$

(Forchheimer, 1901) tried to extend the Darcy law to non laminar flow by introducing a second term. His equation is:

$$-\frac{dp}{d\ell_p} = \frac{k v}{\mu} \pm \rho g - \beta \rho v^2 \quad (\text{iv})$$

(Brinkman, 1947) tried to extend the Darcy equation to non viscous flow by adding a term borrowed from the Navier Stokes equation. Brinkman equation takes the form:

$$-\frac{dp}{d\ell_p} = \frac{k v}{\mu} \pm \rho g + \frac{\mu}{d\ell_p} \frac{d^2 v}{d\ell_p^2} \quad (\text{v})$$

In 2003, Belhaj et al. re-examined the equations for non viscous flow in porous media. The authors observed that; neither the Forchheimer equation nor the Brinkman equation used alone can accurately predict the pressure gradients encountered in non viscous flow, through porous media. According to the authors, relying on the Brinkman equation alone can lead to underestimation of pressure gradients, whereas using Forchheimer equation can lead to overestimation of pressure gradients. Belhaj et al combined all the terms in the Darcy, Forchheimer and Brinkman equations together with a new term they borrowed from the Navier Stokes equation to form a new model. Their equation can be written as:

$$\frac{dp}{d\ell_p} = \frac{\mu}{\phi} \frac{d^2 v}{d\ell_p^2} - \frac{\mu v}{k} - \beta \rho v^2 + \rho g - \frac{\rho v dv}{d\ell_p} \quad (\text{vi})$$

In this work, a cylindrical homogeneous porous medium is considered similar to a pipe. The effective cross sectional area of the porous medium is taken as the cross sectional area of a pipe multiplied by the porosity of the medium. With this approach the laws of fluid mechanics can easily be applied to a porous medium. Two differential equations for gas flow in porous media were developed. The first equation was developed by combining Euler equation for the steady flow of any fluid with the Darcy equation; shown by (Ohirhian, 2008) to be an incomplete expression for the lost head during laminar (viscous) flow in porous media and the equation of continuity for a real gas. The Darcy law as presented in the API code 27 was shown to be a special case of this differential equation. The second equation was derived by combining the Euler equation with the a modification of the Darcy-Weisbach equation that is known to be valid for the lost head during laminar and non laminar flow in pipes and the equation of continuity for a real gas.

Solutions were provided to the differential equations of this work by the Runge-Kutta algorithm. The accuracy of the first differential equation (derived by the combination of the Darcy law, the equation of continuity for a real gas and the Euler equation) was tested by data from the book of (Amyx et al., 1960). The book computed the permeability of a certain porous core as 72.5 millidarcy while the solution to the first equation computed it as 72.56 millidarcy. The only modification made to the Darcy-Weisbach formula (for the lost head in a pipe) so that it could be applied to a porous medium was the replacement of the diameter

of the pipe with the product of the pipe diameter and the porosity of the medium. Thus the solution to the second differential equation could be used for both pipe and porous medium. The solution to the second differential equation was tested by using it to calculate the dimensionless friction factor for a pipe ( $f$ ) with data taken from the book of (Giles et al., 2009). The book had  $f = 0.0205$ , while the solution to the second differential equation obtained it as 0.02046. Further, the dimensionless friction factor for a certain core ( $f_p$ ) calculated by the solution to the second differential equation plotted very well in a graph of  $f_p$  versus the Reynolds number for porous media that was previously generated by (Ohirhian, 2008) through experimentation.

### Development of Equations

The steps used in the development of the general differential equation for the steady flow of gas pipes can be used to develop a general differential equation for the flow of gas in porous media. The only difference between the cylindrical homogenous porous medium lies in the lost head term.

The equations to be combined are;

- (a) Euler equation for the steady flow of any fluid.
- (b) The equation for lost head
- (c) Equation of continuity for a gas.

The Euler equation is:

$$\frac{dp}{\gamma} + \frac{v dv}{g} \pm d\ell_p \sin \theta + dh_l = 0 \quad (1)$$

In equation (1), the positive sign (+) before  $d\ell_p \sin \theta$  corresponds to the upward direction of the positive  $z$  coordinate and the negative sign (-) to the downward direction of the positive  $z$  coordinate. In other words, the plus sign before  $d\ell_p \sin \theta$  is used for uphill flow and the negative sign is used for downhill flow.

The Darcy-Weisbach equation as modified by (Ohirhian, 2008) (that is applicable to laminar and non laminar flow) for the lost head in isotropic porous medium is:

$$dh_L = \frac{c' v \mu d\ell_p}{k\gamma} \quad (2)$$

The (Ohirhian, 2008) equation (that is limited to laminar flow) for the lost head in an isotropic porous medium is;

$$dh_L = \frac{32c v \mu d\ell_p}{\gamma d_p^2} \quad (3)$$

The Darcy-Weisbach equation as modified by (Ohirhian, 2008) (applicable to laminar and non-laminar flow) for the lost head in isotropic porous medium is;

$$dh_L = \frac{f_p v^2 d\ell_p}{2 g d_p} \quad (4)$$

The Reynolds number as modified by (Ohirhian, 2008) for an isotropic porous medium is:

$$\begin{aligned} R_{Np} &= \frac{\gamma v d_p}{g \mu} = \frac{4 \gamma Q}{\pi g \mu d_p} \\ &= \frac{4 W}{\pi g \mu d_p} \end{aligned} \quad (5)$$

In some cases, the volumetric rate (Q) is measured at a base pressure and a base temperature. Let us denote the volumetric rate measured at a base pressure ( $P_b$ ) and a base temperature ( $T_b$ ) then,

$$W = \gamma_b Q_b$$

The Reynolds number can be written in terms of  $\gamma_b$  and  $Q_b$  as

$$R_{Np} = \frac{4 \gamma_b Q_b}{\pi g \mu d_p} \quad (6)$$

If the fluid is a gas, the specific weight at  $P_b$  and  $T_b$  is

$$\gamma_b = \frac{p_b M}{z_b T_b R} \quad (7)$$

Also,  $M = 28.97 G_g$ , then:

$$\gamma_b = \frac{28.97 G_g p_b}{z_b T_b R} \quad (8)$$

Substitution of  $\gamma_b$  in equation (4.8) into equation (4.6) leads to:

$$R_{NP} = \frac{36.88575 G_g P_b Q_b}{R g d_p \mu_g z_b T_b} \quad (9)$$

**Example 1**

In a routine permeability measurement of a cylindrical core sample, the following data were obtained:

Flow rate of air = 2 cm<sup>3</sup> / sec

Pressure upstream of core = 1.45 atm  
absolute

Pressure downstream of core = 1.00 atm  
absolute

Flowing temperature = 70 ° F

Viscosity of air at flowing temperature = 0.02  
cp

Cross sectional area of core = 2 cm<sup>2</sup>

Length of core = 2 cm

Porosity of core = 0.2

Find the Reynolds number of the core

**Solution**

Let us use the pounds seconds feet (p s f) consistent set units. Then substitution of values into

$$\gamma_b = \frac{p_b M}{z_b T_b R}$$

gives:

$$\gamma_b = \frac{14.7 \times 144 \times 28.97}{1 \times 530 \times 1545} = 0.0748 \text{ lb} / \text{ft}^3$$

$$Q_b = 2 \text{ cm}^3 / \text{sec} = 2 \times 3.531467 \text{ E}^{-5} \text{ ft}^3 / \text{sec}$$

$$= 7.062934 \text{ e}^{-5} \text{ ft}^3 / \text{sec}$$

$$W = \gamma_b Q_b = 0.0748 \text{ lb} / \text{ft}^3 \times 7.062934 \text{ e}^{-5} \text{ ft}^3 / \text{sec} = 5.289431 \text{ E}^{-6} \text{ lb} / \text{sec}$$

$$\mu = 0.02 \text{ cp} = 0.02 \times 2.088543 \text{ lb} / \text{sec} / \text{ft}^2 \quad A_p = \frac{\pi d_p^2}{4} \quad \therefore \text{then, } d_p = 1.128379 \sqrt{A_p}$$

$$= 4.177086 \text{ E}^{-7} \text{ lb} / \text{sec} / \text{ft}^2 \quad = 1.128379 \sqrt{2 \times 0.2} = 0.713650 \text{ cm}$$

$$= 0.023414 \text{ ft}$$

$$\text{Then } R_{NP} = \frac{4 W}{\pi g \mu d_p} = \frac{4 \times 5.289431 \text{E} - 6}{\pi \times 32.2 \times 4.177086 \text{E} - 7 \times 0.02341} = 21.385242$$

*Alternatively*

$$R_{NP} = \frac{36.88575 G_g P_b Q_b}{R g d_p \mu_g z_b T_b} = \frac{36.885750 \times 1 \times 14.7 \times 144 \times 7.052934 \text{E} - 5}{32.2 \times 4.177086 \text{E} - 7 \times 1 \times 530 \times 0.023414} = 21.385221$$

The equation of continuity for gas flow in a pipe is:

$$W = \gamma_1 A_1 v_1 = \gamma_2 A_2 v_2 = \text{Constant} \quad (10)$$

Then,  $W = \gamma A v$ .

In a cylindrical homogeneous porous medium the equation of the weight flow rate can be written as:

$$W = \gamma A_p v. \quad (11)$$

Equation (11) can be differentiated and solved simultaneously with the lost head formulas (equation 2, 3 and 4), and the energy equation (equation 1) to arrive at the general differential equation for fluid flow in a homogeneous porous media.

Regarding the cross sectional area of the porous medium ( $A_p$ ) as a constant, equation (11) can be differentiated and solve simultaneously with equations (2) and (1) to obtain.

$$\frac{d p}{d \ell_p} = \frac{\left( \frac{c_f v \mu}{k} \mp \gamma \sin \theta \right)}{\left( 1 - \frac{W^2}{\gamma^2 A_p^2 g} \frac{d \gamma}{d p} \right)} \quad (12)$$

Equation (12) is a differential equation that is valid for the laminar flow of any fluid in a homogeneous porous medium. The fluid can be a liquid of constant compressibility or a gas. The negative sign that proceeds the numerator of equation (12) shows that pressure decreases with increasing length of porous media.

The compressibility of a fluid ( $C_f$ ) is defined as:

$$C_f = \frac{1}{\gamma} \frac{d\gamma}{dp} \quad (13)$$

Combination of equations (12) and (13) leads to:

$$\frac{dp}{d\ell} = \frac{\left( \frac{c' v \mu}{k} \mp \gamma \sin\theta \right)}{\left( 1 - \frac{W^2}{\gamma A_p^2 g} \right)} \quad (14)$$

Differentiation of equation (11) and simultaneous solution with equations (2), (1) and (13) after some simplifications, produces:

$$\frac{dp}{d\ell} = \frac{\left( \frac{32 c v \mu}{d_p^2} \mp \gamma \sin\theta \right)}{\left( 1 - \frac{W^2 C_f}{\gamma A_p^2 g} \right)} \quad (15)$$

Differentiation of equation (6) and simultaneous solution with equations (4), (1) and (13) after some simplifications produces:

$$\frac{dp}{d\ell} = \frac{\left( \frac{f_p W^2}{2 \gamma A_p^2 d_p} \mp \gamma \sin\theta \right)}{\left( 1 - \frac{W^2 C_f}{\gamma A_p^2 g} \right)} \quad (16)$$

Equation (16) can be simplified further for gas flow through homogeneous porous media. The cross sectional area of a cylindrical cross medium is:

$$A_p = \frac{\pi d_p^2}{4} \quad (17)$$

The equation of state for a non ideal gas is:

$$\gamma = \frac{p M}{z T R} \quad (18)$$

Where

$p$  = Absolute pressure

$T$  = Absolute temperature

Multiply equation (11) with  $\gamma$  and substitute  $A_p$  in equation (17) and use the fact that:

$$\frac{p \, dp}{d \ell_p} = \frac{1}{2} \frac{d p^2}{d \ell_p}$$

Then

$$\frac{dP^2}{d \ell_p} = \left[ \frac{1.621139 \frac{f p W^2 z R T}{d^5 M g} \frac{2 M \sin \theta P^2}{z R T}}{1 - \frac{1.621139 W^2 z R T C_f}{M g d^4 P}} \right] \quad (19)$$

The compressibility of ideal gas ( $C_g$ ) is defined as

$$C_g = \frac{1}{p} - \frac{1}{z} \frac{z}{p} \quad (20)$$

For an ideal gas such as air,

$$C_g = \frac{1}{p} \quad (21)$$

(Matter et al, 1975) and (Ohirhian, 2008) have proposed equations for the calculation of the compressibility of hydrocarbon gases. For a sweet natural gas (natural gas that contains CO<sub>2</sub> as major contaminant), (Ohirhian, 2008) has expressed the compressibility of the real gas ( $C_g$ ) as:

$$C_f = \frac{K}{p} \quad (22)$$

For Nigerian (sweet) natural gas  $K = 1.0328$  when  $p$  is in psia. Then equation (19) can then be written compactly as:

$$\frac{d p^2}{d \ell} = \frac{(A A_p \pm B_p p^2)}{\left(1 - \frac{C_p}{p^2}\right)} \quad (23)$$

Where

$$A A_p = \frac{1.621139 f_p W^2 z R T}{g d_p^5 M}, \quad B_p = \frac{2 M \sin \theta}{z R T},$$

$$C_p = \frac{K W^2 z R T}{g M d_p^4}$$

The denominator of the differential equation (23) is the contribution of kinetic effect to the pressure drop across a given length of a cylindrical isotropic porous medium. In a pipe the kinetic contribution to the pressure drop is very small and can be neglected. What of a homogeneous porous medium?

### Kinetic Effect in Pipe and Porous Media

An evaluation of the kinetic effect can be made if values are substituted into the variables that occurs in the denominator of the differential equation (23)

#### Example 2

Calculate the kinetic energy correction factor, given that 0.75 pounds per second of air flow isothermally through a 4 inch pipe at a pressure of 49.5 psia and temperature of 90 °F.

#### Solution

The kinetic effect correction factor is  $1 - \frac{C}{p^2}$

Where C for a pipe is given by,  $C = \frac{K W^2 z R T}{g M d^4}$

Here

$$W = 0.75 \text{ lb / sec}, \quad d = 4 \text{ inch} = 4 / 12 \text{ ft} = 0.333333 \text{ ft},$$

$$p = 49.5 \text{ psia} = 49.5 \times 14.7 \text{ psf} = 718.65 \text{ psf}, \quad T = 90^\circ \text{F} = (90 + 460)^\circ \text{R} = 550^\circ \text{R}$$

$K = 1$  for an ideal gas,  $z = 1.0$  (air is the fluid),  $R = 1545 \text{ ft}^2 / \text{sec}^2$ ,  $M = 28.97$ . Then,

$$C = \frac{1 \times 0.75^2 \times 1 \times 1545 \times 550}{32.2 \times 28.97 \times 0.333333^4} = 41504.58628$$

The kinetic effect correction factor is

$$1 - \frac{C}{p^2} = 1 - \frac{41504.58628}{7128^2} = 0.999183$$

### Example 3

If the pipe in example 1 were to be a cylindrical homogeneous porous medium of 25 % porosity, what would be the kinetic energy correction factor?

### Solution

$$\text{Here, } d_p = d\sqrt{\phi} = 0.333333 \sqrt{0.25} = 0.1666667 \text{ ft}$$

$$C_p = \frac{1 \times 0.75^2 \times 1 \times 1545 \times 550}{32.2 \times 28.97 \times 0.166667^4} = 344046.0212$$

Then,

$$1 - \frac{C_p}{p^2} = 1 - \frac{3441046.0212}{7128^2} = 0.993221$$

The kinetic effect is also small, though not as small as that of a pipe. The higher the pressure, the more negligible the kinetic energy correction factor. For example, at 100 psia, the kinetic energy correction factor in example 2 is:

$$1 - \frac{3441046.0212}{(100 \times 144)^2} = 0.998341$$

### Simplification of the Differential Equations for Porous Media

When the kinetic effect is ignored, the differential equations for porous media can be simplified. Equation (14) derived with the Darcy form of the lost head becomes:

$$\frac{d p}{d \ell_p} = \left( \frac{c' v \mu}{k} \mp \gamma \sin \theta \right) \quad (24)$$

Equation (15) derived with the (Ohirhian, 2008) form of the lost head becomes:

$$\frac{d p}{d \ell_p} = \left( \frac{32 c v \mu}{d_p^2} \mp \gamma \sin \theta \right) \quad (25)$$

Equation (16) derived with the (Ohirhian, 2008) modification of the Darcy- Weisbach lost head becomes:

$$\frac{dp}{d\ell} = \left( \frac{f_p W^2}{2\gamma A p^2} - \gamma \sin\theta \right) \quad (26)$$

In terms of velocity ( $v$ ) equation (26) can be written as:

$$\frac{dp}{d\ell} = \left( \frac{f_p v^2}{2\gamma d} - \gamma \sin\theta \right) \quad (27)$$

In certain derivations (for example, reservoir simulation models) it is required to make  $v$  or  $W$  subject of equations (24) to (27)

### Making velocity ( $v$ ) or weight ( $W$ ) subject of the simplified differential equations

When  $v$  is made subject of equation (24), we obtain:

$$v = \frac{-k}{c/\mu} \left( \frac{dp}{d\ell} - \gamma \sin\theta \right) \quad (28)$$

When  $v$  is made subject of equation (25), we obtain:

$$v = \frac{-dp^2}{32c\mu} \left( \frac{dp}{d\ell} - \gamma \sin\theta \right) \quad (29)$$

When  $v^2$  is made subject of equation (27), we obtain:

$$v^2 = \frac{-2gdp}{f_p\gamma} \left( \frac{dp}{d\ell} - \gamma \sin\theta \right) \quad (30)$$

When  $W^2$  is made subject of equation (26), we obtain:

$$W^2 = \frac{-2gdp A p^2}{f_p\gamma} \left( \frac{dp}{d\ell} - \gamma \sin\theta \right) \quad (31)$$

Let  $S$  be the direction of flow which is always positive, then equation (28) can be written as:

$$v_s = \frac{-k}{\mu} \left( \frac{dp}{ds} - \frac{\gamma}{1.01325} \frac{dz}{ds} \times 10^6 \right) \quad (32)$$

Where:

$V_s$  = Volumetric flux across a unit area of porous medium in unit time along flow path, S cm / sec  
 $\gamma = \rho g$  = Specific weight of fluid, gm weight / cc

$\rho$  = Mass Density of fluid, gm mass / cc

$g$  = Acceleration due to gravity, 980.605 cm / sec<sup>2</sup>

$\frac{dp}{ds}$  = Pressure gradient along S at the point to

which  $v_s$  refers, atm / cm

$\mu$  = Viscosity of the fluid, centipoises

$z$  = Vertical coordinate, considered positive

downwards, cm

$k$  = Permeability of the medium, darcys.

$1.01325 \times 10^6$  = dynes / sq cm atm

According to (Amyx et al., 1960), this is "the generalized form of Darcy law as presented in APT code 27".

### Horizontal and Uphill Gas Flow in Porous Media

In uphill flow, the + sign in the numerator of equation (23) is used. Neglecting the kinetic effect, which is small, equation (23) becomes

$$\frac{dp^2}{d\ell} = AA_p + B_p p^2 \quad (33)$$

$$AA_p = \frac{1.621139 f_p z TR W^2}{5 g d_p M},$$

$$B_p = \frac{2M \sin \theta}{z TR}$$

An equation similar to equation (33) can also be derived if the Darcian lost head is used. The horizontal / uphill gas flow equation in porous media becomes.

$$\frac{dp^2}{d\ell_p} = AA_p' + B_p p^2 \quad (34)$$

Where

$$\begin{aligned} AA_p' &= \frac{2c'\mu zTRW}{A_p Mk} = \frac{8c'\mu zTRW}{\pi d_p^2 Mk} \\ &= \frac{2.546479 c'\mu zTRW}{d_p^2 Mk} \end{aligned}$$

### Solution to the Horizontal/Uphill Flow Equation

Differential equations (33) and (34) are of the first order and can be solved by the classical Runge - Kutta algorithm. The Runge - Kutta algorithm used in this work came from book of (Aires, 1962) called "Theory and problems of Differential equations". The Runge - Kutta solution to the differential equation

$$\frac{dy}{dx} = f(x, y) \text{ at } x = x_n \text{ given that}$$

$$y = y_0 \text{ at } x = x_0 \text{ is}$$

$$y = y_0 + \frac{1}{6}(k_1 + 2(k_2 + k_3) + k_4) \quad (35)$$

where

$$k_1 = Hf(x_0, y_0)$$

$$k_2 = Hf\left(x_0 + \frac{1}{2}H, y_0 + \frac{1}{2}k_1\right)$$

$$k_3 = Hf\left(x_0 + \frac{1}{2}H, y_0 + \frac{1}{2}k_1\right)$$

$$k_4 = Hf(x_0 + H, y_0 + k_3)$$

$$H = \frac{x_n - x_0}{n}$$

$n = \text{sub intervals (steps)}$

Application of the Runge - Kutta algorithm to equation (33) leads to:

$$p_1^2 = p_2^2 + \bar{y}_a \quad (36)$$

Where

$$\bar{y}_a = \frac{aa_p}{a} \left( 1 + x_a + 0.5x_a^2 + 0.36x_a^3 \right) + \frac{p_2^2}{6} \left( 4.96x_a + 1.48x_a^2 + 0.72x_a^3 \right) + \frac{u_p}{6} \left( 4.96 + 1.96x_a + 0.72x_a^2 \right)$$

$$aa_p = (AA_{p2} + S_2)L$$

$$AA_{p2} = \frac{1.621139 f_p z_2 T_2 R W^2}{g d_p^5 M},$$

$$S_2 = \frac{2M \sin \theta p_2^2}{z_2 T_2 R}$$

$$u_p = \frac{1.621139 f_p z_{av} T_{av} R W^2}{g d_p^5 M},$$

$$x_a = \frac{2M \sin \theta L}{z_{av} T_{av} R}$$

Where:

$p_1$  = Pressure at inlet end of porous medium     $p_2$  = Pressure at exit end of porous medium

$f_p$  = Friction factor of porous medium.

$\theta$  = Angle of inclination of porous medium with horizontal in degrees.

$z_2$  = Gas deviation factor at exit end of porous medium.

$T_2$  = Temperature at exit end of porous medium

$T_1$  = Temperature at inlet end of porous medium

$z_{av}$  = Average gas deviation factor  
evaluated with  $T_{av}$  and  $p_{av}$

$T_{av}$  = Arithmetic average temperature of  
the porous medium given by  
 $0.5(T_1 + T_2)$  and

$$p_{av} = \sqrt{p_2^2 + aa_p^2}$$

In equation (36), the component  $k_4$  in the Runge - Kutta algorithm was given some weighting to compensate for the variation of temperature ( $T$ ) and gas deviation factor ( $z$ ) between the mid section and the inlet end of the porous medium. In isothermal flow where there is little variation of the gas deviation factor between the mid section and the inlet end of the porous medium, the coefficients of  $x_a$  change slightly, then,

$$\begin{aligned} \bar{y}_a = & aa_p^a \left( 1 + x_a + 0.5x_a^2 + 0.25x_a^3 \right) \\ & + \frac{p_2^2}{6} (5x_a + 2x_a^2 + 0.5x_a^3) \\ & + \frac{u_p^2}{6} (5 + 2x_a + 0.5x_a^2) \end{aligned}$$

Application of the Runge-Kutta algorithm to equation (34) produces.

$$p_1^2 = p_2^2 + \bar{y}_b \quad (37)$$

$$\begin{aligned} \bar{y}_b = & aa_p^b \left( 1 + x_b + 0.5x_b^2 + 0.36x_b^3 \right) \\ & + \frac{p_2^2}{6} (4.96x_b + 1.48x_b^2 + 0.72x_b^3) \\ & + \frac{u_p^2}{6} (4.96 + 1.96x_b + 0.72x_b^2) \end{aligned}$$

Where  $aa_{p2}^b = \left( AA_{p2}^b + S_2 \right) L$

$$\begin{aligned}
 AA_{p2}^b &= \frac{2c'\mu z_2 T_2 RW}{A_p M k} = \frac{8c'\mu z_2 T_2 RW}{\pi d_2^2 M k} \\
 &= \frac{2.546479 c'\mu z_2 T_2 RW}{d_p^2 M k} \\
 S_2 &= \frac{2M \sin^2 \theta_p}{z_2 T_2 R} x_b = \frac{2c'\mu z_{av}^b T_{av} RW}{A_p M k} \\
 &= \frac{2.546479 c'\mu z_{av}^b T_{av} RW}{d_p^2 M k}
 \end{aligned}$$

$$x_b = \frac{2M \sin \theta L}{z_{av}^b T_{av} R}$$

Where

$z_{av}^b$  = Average gas deviations factors evaluated with  $T_{av}$  and  $p_{av}^b$

$T_{av}$  = Arithmetic average Temperature of the porous medium =  $0.5(T_1+T_2)$ ,

$$p_{av}^b = \sqrt{p_2^2 + 0.5aa_p^b}$$

All other variables remain as defined in equation (36). In isothermal flow where there is not much variation in the gas deviation factor ( $z$ ) between the mid section and inlet and of the porous medium there is no need to make compensation in the  $k_4$  parameter in the Runge Kuta algorithm, then equation (37) becomes:

$$p_1^2 = p_2^2 + \bar{y}_{bT} \quad (38)$$

Where:

$$\bar{y}_{bT} = a a_p^b \left( 1 + x_b + 0.5x_b^2 + 0.25x_b^3 + 0.5x_b^3 \right) + \frac{p_2}{6} \left( 5x_b + 2x_b^2 + 0.5x_b^3 \right) + \frac{u p^b}{6} \left( 5 + 2x_b + 0.5x_b^2 \right)$$

Equation (36) can be arranged as:

$$W^2 f_p^{BB} p^a [z_2 T_2 (1 + x_c + 0.5x_c^2 + 0.36x_c^3) + PU] = \left[ p_1^2 - \frac{p_1^2}{6} (4.96x_c + 1.48x_c^2 + 0.72x_c^2) - p_2^2 - S_2 (1 + x_c + 0.5x_c^2 + 0.36x_c^3) \right] \quad (39)$$

Where

$$PU = z_{av} T_{av} \left( 4.96x_c + 1.48x_c^2 + 0.72x_c^2 \right)$$

$$f_p^{BB} = \frac{1.621139RL}{6g d_p M}, \quad S_2 = \frac{2M \sin \theta p_2^2}{z_2 T_2 R}, \quad x_c = \frac{2M \sin \theta L}{z_{av}^c T_{av} R}$$

$z_{av}^c$  = Average gas deviations factors  
evaluated with  $T_{av}$  and  $p_{av}^c$  and

$$p_{av}^c = \sqrt{\frac{p_1^2 + p_2^2}{2}}$$

All other variables remain as defined in previous equations.

In isothermal flow where there is no significant change in the gas deviation factor ( $z$ ), equation (39) becomes:

$$W^2 f_p^{BB} p^a z_2 T_2 \left[ \left( (1 + x_c + 0.5x_c^2 + 0.25x_c^3) + (5 + 2x_c + 0.5x_c^2) \right) \right] =$$

$$p_1^2 - \frac{p_1^2}{6} (5x_c + 2x_c^2 + 0.5x_c^3) - p_2^2 - \frac{S_2 L}{6} (1 + x_c + 0.5x_c^2 + 0.25x_c^3) \quad (40)$$

When the porous medium is horizontal,  $S_2 = 0$  and  $x_c = 0$  then from equation (40),

$$f_p = \frac{p_1^2 - p_2^2}{W^2 BB_p^a (z_2 T_2 + 4.96 z_{av} T_{av})} \quad (41)$$

In an isothermal flow where there is no variation in  $z$ ,

$$f_p = \frac{p_1^2 - p_2^2}{6 W^2 BB_p^a z_2 T_2} \quad (42)$$

#### Example 4

The following data came from the book of (Giles et al., 2009) called "theory and problem of fluid mechanics and hydraulics"

$W = 0.75$  lb/sec of air,  $R = 1544$ ,  $L = 1800$ ft,  $d = 4$ inch =  $0.333333$ ft,

$g = 32.2$ ft/sec<sup>2</sup>,  $z_2 = Z_{av}^a = 1$  (air is fluid),  $T_2 = T_{av} = 90$ °F =  $550$ °R

(Isothermal flow),  $p_1 = 49.5$ psia =  $7128$ psf,  $P_2 = 45.73$  psia =  $6585.12$  psf.

Pipe is horizontal.

- Calculate friction factor of the pipe ( $f$ )
- If the pipe were to be filled with a homogenous porous material having a porosity of 20% what would be the friction factor ( $f_p$ )?

#### Solution

- Let  $BB^a$  the equivalent  $BB_p^a$  by use of a pipe then.

$$\begin{aligned} BB^a &= \frac{1.621139RL}{6gd^5M} \\ &= \frac{1.621139 \times 1544 \times 1800}{6 \times 32.2 \times 0.333333^5 \times 28.97} \\ &= 195610.8241 \\ f &= \frac{p_1^2 - p_2^2}{6W^2 BB^a z_2 T_2} = \frac{7128^2 - 6585.12^2}{6 \times 0.75^2 \times 195610.8241 \times 1 \times 550} \\ &= 0.20463 \end{aligned}$$

The calculated  $f$  agrees with  $f = 0.0205$  obtained by Giles et al., who used another equation.

$$(b) \quad d_p = 0.333333 \times \sqrt{0.2 \text{ft}} = 0.149071 \text{ft}$$

$$\begin{aligned} BB_p^a &= \frac{1.621139RL}{6gd_p^5 M} \\ &= \frac{1.621139 \times 1544 \times 1800}{6 \times 32.2 \times 0.149071^5 \times 28.97} \\ &= 10934995.62 \\ f_p &= \frac{p_1^2 - p_2^2}{6W^2 BB_p^a z_2 T_2} \\ &= \frac{7128^2 - 6585.12^2}{6 \times 0.75^2 \times 10934995.6^2 \times 1 \times 550} \\ &= 3.667626 \text{ E} - 4 \end{aligned}$$

The equation for pressure transverse in a porous medium by use of Darcian lost head (equation (37)) can be arranged as:

$$\begin{aligned} &\frac{W^2 BB_p^b}{k} \left[ z_2 T_2 \left( 1 + x_c + 0.5x_c^2 + 0.36x_c^3 \right) \right. \\ &\quad \left. + z_{av}^b T_{av} \left( 4.96 + 1.96x_c + 0.72x_c^2 \right) \right] \\ &= p_1^2 - \frac{p_1^2}{6} \left( 4.96x_c + 1.48x_c^2 + 0.36x_c^3 \right) - p_2^2 \\ &\quad - \frac{S_2 L}{6} \left( 1 + x_c + 0.5x_c^2 + 0.3x_c^2 \right) \end{aligned} \quad (43)$$

Where

$$BB_p^b = \frac{2c' \mu RL}{6A_p M} = \frac{2.576479c' \mu RL}{6d_p^2 M},$$

$$S_2 = \frac{2M \sin \theta P_2^2}{z_2 T_2 R}$$

$$x_c = \frac{2M \sin \theta L}{z_{av}^c T_{av} R}$$

$z_{av}^c$  = Average gas deviation factor calculated with  $p_{av}^c$  and  $T_{av}$

$$p_{av}^c = \sqrt{\frac{p_1^2 + p_2^2}{2}}$$

When the porous medium is horizontal,  $S_2 = 0$ , and  $x_c = 0$ , then ,

$$k = \frac{W^2 B B_p^b \left[ z_2 T_2 + 4.96 z_{av}^c T_{av} \right]}{(p_1^2 - p_2^2)} \quad (44)$$

When the flow is isothermal and there is no significant variation in the gas deviation factor ( $z$ ) equation (44) becomes.

$$\begin{aligned} & \frac{W^2 B B_p^b}{k} \left[ z_2 T_2 (1 + x_c + 0.5x_c^2 + 0.25x_c^3) \right. \\ & \quad \left. + z_2 T_2 (5 + 2x_c + 0.5x_c^2) \right] \\ & = \left[ p_1^2 - \frac{p_1^2}{6} (5x_c + 2x_c^2 + 0.5x_c^3) - p_2^2 \right. \\ & \quad \left. - \frac{S_2 L}{6} (1 + x_c + 0.5x_c^2 + 0.25x_c^3) \right] \quad (45) \end{aligned}$$

When the porous medium is horizontal, equation (45) becomes

$$k = \frac{6W B B_p^b z_2 T_2}{(p_1^2 - p_2^2)} \quad (46)$$

### Example 5

The following problem came from the book of (Amyx et al., 1960). During a routine permeability test, the following data were obtained.

Flow rate (Q) = 1,000cc of air in 500sec.  
 Pressure down stream of core ( $p_2$ ) = 1 atm. absolute  
 Flowing temperature (T) = 70 °F  
 Viscosity of air at test temperature ( $\mu$ ) = 0.02c<sub>p</sub>  
 Cross-sectional area of core ( $A_p$ ) = 2cm<sup>2</sup>  
 Pressure upstream of core ( $p_1$ ) = 1.45 atm absolute  
 Length of core ( $L_p$ ) = 2cm  
 Compute the permeability of the core in millidarcy

**Solution**

In oil field units in which pressure is in atmospheres and temperature is expressed in degree Kelvin, R = 82.1

$$\begin{aligned} \text{Here, } T = 70^\circ\text{F} &= (70 + 460)^\circ\text{R} = \frac{530^\circ\text{R}}{1.8} \\ &= 294.4^\circ\text{K} \\ Q &= 1000\text{cc} / 500 \text{ sec} = 2\text{cc} / \text{sec} \\ z_1 &= z_2 = z_{av}^c = 1 \text{ (air is fluid)} \end{aligned}$$

The volumetric flow rate can be converted to weight flow rate by:

$$W = \gamma Q \text{ where } \gamma = \frac{pM}{zTR}$$

Substituting given values

$$\begin{aligned} W &= \frac{1 \times 28.97 \times 2}{1 \times 82.1 \times 294.4} \\ &= 0.002397163 \text{ gm / sec} \end{aligned}$$

Taking the core to be horizontal

$$\begin{aligned} k &= \frac{6wBB_p^b z_2 T_2}{(p_1^2 - p_2^2)} \text{ where} \\ BB_p^b &= \frac{2\mu RL}{6A_p M}, (c' = 1 \text{ in a consistent set of units}) \\ &= \frac{2 \times 0.02 \times 82.1 \times 2}{6 \times 2 \times 28.97} = 1.889311\text{E}^{-2} \end{aligned}$$

Then

$$k = \frac{6 \times 2.397163E - 3 \times 1.889311E - 2 \times 1 \times 294.4}{1.45^2 - 1^2}$$

$$= 0.07256 \text{ darcy} = 72.56 \text{ millidarcy}$$

Amyx, et al obtained the permeability of this core as 72.5md with a less rigorous equation.

### Horizontal and Downhill Gas Flow in Porous Media

In downhill flow, the negative (-) sign in the numerator of equation (23) is used. Neglecting the kinetic effect, equation (23) becomes:

$$\frac{dp^2}{d\ell_p} = AA_p - B_p P^2 \quad (47)$$

Where

$$AA_p = \frac{1.621139 f_p zTR}{5 d_p M},$$

$$B_p = \frac{2M \sin \theta}{zTR}$$

By use of the Darcian lost head, the differential equation for downhill gas flow in porous media becomes.

$$\frac{dp^2}{d\ell_p} = AA'_p - B_p P^2 \quad (48)$$

Where

$$AA'_p = \frac{2c' \mu zTRW}{A_p Mk} = \frac{2.546479 c' \mu zTRW}{d_p^2 Mk}, \quad B_p = \frac{2M \sin \theta}{zTR}$$

### Solution to the differential equation for horizontal and downhill flow

The Runge-Kutta numerical algorithm that was used to provide a solution to the differential equation for horizontal and uphill flow can also be used to solve the differential equation for horizontal and downhill flow. Application of the Runge - Kutta algorithm to equation (47) produces.

$$p_2 = \sqrt{p_1^2 - \left| \bar{y}_c \right|} \quad (49)$$

Where

$$\bar{y}_c = aa_p^c (1 - x_d + 0.5x_d^2 - 0.3x_d^3) + \frac{p_1^2}{6} (-5.2x_d + 2.2x_d^2 - 0.6x_d^3)$$

$$+ \frac{u_p^c}{6} (5.2 - 2.2x_d - 0.6x_d^3)$$

$$aa_p^c = (AAp_1 - S_1)L$$

$$AAp_1 = \frac{1.621139f_p z_1 T_1 R W^2}{g d_p^5 M},$$

$$S_1 = \frac{2M \sin \theta p_1^2}{z_1 T_1 R}$$

$$u_p^c = \frac{1.621139f_p z_{av}^d T_{av} R W^2}{g d_p^5 M},$$

$$x_d = \frac{2M \sin \theta L}{z_{av}^d T_{av} R}$$

$z_{av}^d$  = Gas deviation factor (z) calculated

with  $T_{av} = 0.5(T_1 + T_2)$

$$\text{and } p_{av}^d = \sqrt{p_1^2 - |aa_p^c|}$$

Other variables remain as defined in previous equations.

In equation (49), the parameter  $k_4$  in the Runge-Kutta algorithm is given some weighting to compensate for the variation of the temperature (T) and the gas deviation factor between the mid section and the exit end of the porous medium. In isothermal flow in which there is no significant variation of the gas deviation factor (z) between the midsection and the exit end of the porous medium, equation (49) becomes.

$$p_2 = \sqrt{p_1^2 - |\bar{y}_{cT}|} \quad (50)$$

Where

$$\begin{aligned} \bar{y}_{cT} = & aa_p^c (1 - x_d + 0.5x_d^2 - 0.35x_d^3) \\ & + \frac{p_1^2}{6} (-5.0x_d + 2.0x_d^2 - 0.7x_d^3) \\ & + \frac{u_p^c}{6} (5.0 - 2.0x_d - 0.7x_d^2) \end{aligned}$$

Other variables in equation (50) remain as defined in equation (49).

Application of the Runge -Kutta algorithm to the down hill differential equation by use of Darcian lost head (equation (48)) gives

$$p_2^2 = p_1^2 - |\bar{y}_d| \quad (51)$$

Where

$$\begin{aligned} \bar{y}_d = & aa_p^d (1 - x_e + 0.5x_e^2 - 0.3x_e^3) \\ & + \frac{p_1^2}{6} (-5.2x_e + 2.2x_e^2 - 0.6x_e^3) \\ & + \frac{u_p^d}{6} (5.2 - 2.2x_e - 0.6x_e^2) \end{aligned}$$

$$\begin{aligned} aa_p^d &= (AAp_1' - S_1)L \\ AAp_1' &= \frac{2c'\mu z_1 T_1 RW}{A_p Mk} \\ &= \frac{2.54679 c'\mu z_{av}^e T_{av} RW}{d_p^2 Mk}, \end{aligned}$$

$$S_2 = \frac{2M \sin \theta P_1^2}{z_1 T_1 R}$$

$$x_e = \frac{2M \sin \theta L}{z_{av}^e T_{av} R},$$

$$u_p^d = \frac{2c' \mu z_{av} T_{av} RW}{A_p M k} = \frac{2.546479 c' \mu z_{av}^e T_{av} RW}{d_p^2 M k}$$

$z_{av}^e$  = Gas deviation factor ( $z$ ) calculated

with  $T_{av}$  and  $p_{av}^e$   $T_{av} = 0.5(T_1 + T_2)$

$$p_{av}^e = \sqrt{p_1^2 - \left| \frac{a a_p^d}{a} \right|}$$

Equation (49) can be written as:

$$\frac{f_p W^2 \left[ J_p + \frac{S_1 L}{6} (1 - x_f + 0.5^2 x_f - 0.3 x_f^3) \right]}{BB_p^a \left[ Z_1 T_1 (1 - x_f + 0.5 x_f^2 - 0.3 x_f^3) + XX \right]} \quad (53)$$

Where  $XX = z_{av}^f T_{av} (5.2 - 2.2 x_f + 0.6 x_f^2)$

$$J_p = P_1^2 - \frac{P_1^2}{6} \left( -5.2 x_f + 2.2 x_f^2 - 0.6 x_f^3 \right) - p_2^2 \quad \text{if } BB_p^a \geq S_1$$

$$J_p = P_2^2 - p_1^2 - \frac{P_1^2}{6} \left( 5.2 x_f + 2.2 x_f^2 - 0.6 x_f^3 \right) - p_2^2 \quad \text{if } BB_p^a < S_1$$

$$BB_p^a = \frac{1.621139 RL}{6 g d_p^5 M} = \frac{0.270110 RL}{g d_p^5 M}$$

$$S_1 = \frac{2 M \sin \theta p_1^2}{6 g d_p^5 M}, \quad x_f = \frac{2 M \sin \theta L}{z_{av}^f T_{av} R}$$

$z_{av}^f$  = Gas deviation factor at the midsection of the porous medium calculated with

$$T_{av} \text{ and } p_{av}^f, \text{ where } T_{av} = 0.5(T_1 + T_2)$$

$$\text{and } p_{av}^f = \frac{2p_1p_2}{p_1 + p_2}$$

During isothermal flow in which there is no significant variation of the gas deviation factors ( $z$ ) between the mid section and the exit end of the porous medium, equation (52) can be written as:

$$f_p w^2 = \frac{\left[ J_p + \frac{S_1 L}{6} (1 - x_f + 0.5x_f^2 - 0.35x_f^3) \right]}{BB^a p \left[ z_1 T_1 (1 - x_f + 0.5x_f^2 - 0.35x_f^3) \right] + z_1 T_1 (5.0 - 2.0x_f + 0.7x_f^2)} \quad (54)$$

The variables in equation (53) remain as defined in equation (52)

### Example 6

Suppose the porous medium of example 3b was vertical what would be the dimensionless friction factor by use of the same pressure as they were in example 3b?

### Solution

Here,  $P_1 = 7128 \text{ psf}$ ,  $P_2 = 6585.12 \text{ psf}$ ,  $T_1 = T_{av} = 550^\circ \text{R}$ ,  $W = 0.75 \text{ lb / sec}$ ,  $R = 1544$ ,  $L_p = 1800 \text{ ft}$ ,  $g = 32.2 \text{ ft / sec}^2$ ,  $d_p = 0.066667 \text{ ft}$ ,  $z_1 = z_{av}^f = 1$ , since  $\theta = 90^\circ$ ,  $\sin 90^\circ = 1$

$$x_f = \frac{2M \sin \theta L}{z_{av}^f T_{av} R} = \frac{2 \times 28.97 \times 1 \times 1800}{1 \times 550 \times 1544} = 0.122812$$

The flow is isothermal;  $z$  is constant at 1.0 so equation (52) is used.

$$\begin{aligned} 1 - x_f + 0.5x_f^2 - 0.35x_f^3 &= 0.884081 \\ 5.0 - 2.0x_f + 0.7x_f^2 &= 4.764934 \\ -5.0x_f + 2.0x_f^2 + 0.7x_f^3 &= 0.585191 \end{aligned}$$

$$BB_p^a = \frac{0.270110RL}{gd_p^5 M}$$

$$= \frac{0.270110 \times 1544 \times 1800}{32.2 \times 0.066667^5 \times 28.97} = 61128325.$$

$$S_1 = \frac{2M \sin \theta p_1^2}{z_1 T_1 R} = \frac{2 \times 28.97 \times 1 \times 7128^2}{1 \times 550 \times 1544}$$

$$= 3466.601$$

$BB_p^a > S_1, \text{ then}$

$$J_p = p_1^2 - \frac{p_1^2}{6} (-5.0x_f + 2.0x_f^2 - 0.7x_f^3) - p_2^2$$

$$= 7128^2 - \frac{7128^2}{6} (-0.585191)$$

$$-6585.12^2 = 12400014$$

$$\frac{S_1 L}{6} (1 - x_f + 0.5x_f^2 - 0.35x_f^3)$$

$$= (3466.601 \times 1800 \times 0.884081) / 6 = 919426.8859$$

Then

$$f_p = \frac{12400014 + 919426.8859}{0.75^2 \times 61128325 [(1 \times 550 \times 0.884081) + (1 \times 550 \times 4.764934)]}$$

$$= 1.977439E6$$

There is a drastic reduction in the  $f_p$  as compared to  $f_p = 6.560860 \text{ E-6}$  when the porous medium was horizontal. The effect of inclination becomes more severe as the porous medium gets longer.

Equation (40) can be written as:

$$k = \frac{BB_p^b W \left[ z_1 T_1 (1 - x_f + 0.5x_f^2 - 0.3x_f^3) + Z_w^f T_w (5.2 - 2.2x_f + 0.6x_f^2) \right]}{\left[ J_p + \frac{S_1 L}{6} (1 - x_f + 0.5x_f^2 - 0.3x_f^3) \right]}$$

Where

$$J_p = p_1^2 - \frac{p_1^2}{6} (-5.2x_f + 2.2x_f^2 - 0.6x_f^3) - p_2^2, \text{ if } BB_p^b \geq S_1$$

$$J_p = P_2^2 - \frac{P_1^2}{6} \left( -5.2x_f + 2.2x_f^2 - 0.6x_f^3 \right) - P_2^2 \quad \text{if } BB_p^b < S_1$$

$$BB_p^b = \frac{2c' \mu RL}{6A_p M} = \frac{2.546479c' \mu RL}{6d_p^2 M}$$

All other variables remain as defined in equation (52). During isothermal flow in which there is no significant variation of the gas deviation factor ( $z$ ) between the mid section and the exit end of the porous medium, equation (54) can be written as:

$$k = \frac{BB_p^b W_z T_1 \left[ (1-x_f + 0.5x_f^2 - 0.3x_f^3) + (5.0 - 2.0x_f + 0.7x_f^2) \right]}{J_p + \frac{S_1 L}{6} (1-x_f + 0.5x_f^2 - 0.3x_f^3)} \quad (55)$$

Beside the coefficients of  $x_f$  all other variables in equation (55) remain as defined in equation (54).

#### Example 7

Compute the permeability of the core of example 4 assuming that the case was vertical.

#### Solution

From example 4,  $W = \gamma Q$

Substituting the given values,  $W = 0.00239716 \text{ gm/sec}$

$\sin \theta = \sin 90^\circ = 1.0$ ,  $M = 28.97$ ,  $L_p = 2 \text{ cm}$

$$z_{av}^f = z_1 = 1, T_1 = T_{av} = 294.4 \text{ }^\circ\text{K}, A_p = 2 \text{ cm}^2$$

$$p_1 = 1.45 \text{ atm}, p_2 = 1.0 \text{ atm}, \mu = 0.02 \text{ cp.}$$

$$x_f = \frac{2M \sin \theta L}{z_{av} T_{av} R} = \frac{2 \times 28.97 \times 2}{1 \times 294.4 \times 82.1} = 0.004794$$

The flow is isothermal so equation (55) is used.

$$1 - x_f + 0.05x_f^2 - 0.35x_f^3 = 0.995217$$

$$5.0 - 2x_f + 0.7x_f^2 - 0.70x_f^3 = 4.990428$$

$$- 5.0x_f + 2.0x_f^2 - 0.70x_f^3 = - 0.023941$$

$$BB_p^b = \frac{2c^1 \mu RL}{6A_p M} = \frac{0.02 \times 82.1 \times 2}{3 \times 2 \times 28.97} = 0.018893$$

$$S_1 = \frac{2M \sin \theta p_1^2}{z_1 T_1 R} = \frac{2 \times 28.97 \times 1 \times 1.45^2}{1 \times 294.4 \times 82.1}$$

$$= 0.005040$$

$BB_p^b > S_1$ , therefore,

$$J_p = p_1^2 - \frac{p_1^2}{6} \left( -5.0x_f + 2.0x_f^2 - 0.7x_f^3 \right) - p_2^2 = 1.45^2 - \frac{1.45^2}{6} \left( - 0.023941 \right) - 1^2 = 1.110883$$

Substitution of given values into equation (54) gives

$$k = \frac{0.018893 \times 0.002397 \times 1 \times 2944 \left[ 0.99521 + 4.990428 \right]}{1.11088 + \frac{0.005040 \times 2 \times 0.995217}{6}}$$

$$= \frac{0.018893 \times 0.00239716 \times 1762.173888}{1.110883 + 0.001672}$$

$$= 0.071734 \text{ darcy} = 71.734 \text{ millidarcy.}$$

Comparing 71.734 md with 72.562md obtained when the core was considered horizontal, it is seen that inclination has reduced, the calculated permeability (k) by  $(72.562 - 71.734)/72.564 = 1.141093$  percent

The longer the core, the more, the effect of inclination.

### Example 8

Use the data of example 4 to calculate the dimensionless friction factor ( $f_p$ ). Because of simplicity assume that the core is horizontal.

**Solution**

$$p_1 = 1.45 \text{ atm} = 1.45 \times 14.7 \times 144 \text{ psf}$$

$$= 3069.36 \text{ psf}$$

$$p_2 = 1 \text{ atm} = 14.7 \times 144 \text{ psf} = 2116.80 \text{ psf}$$

$$z_2 = 1, T_2 = 530^\circ \text{ R}, \theta = .02$$

$$L_p = 2 \text{ cm} = 2 / 2.54 \text{ in} = 2 / (2.54 \times 12) \text{ ft}$$

$$M = 28.97, g = 32.2 \text{ ft} / \text{sec}^2$$

$$A_p = 2 \times 0.2 \text{ cm}^2 = 0.4 \text{ cm}^2, R = 1545$$

$$d_p = 1.128379 \sqrt{A_p} = 0.713650 \text{ cm}$$

$$= 0.023414 \text{ ft}$$

$$\gamma_b = \frac{p_b M}{z_b T_b R} = \frac{1 \times 14.7 \times 28.97}{1 \times 530 \times 1545}$$

$$= 0.074890 \text{ lb} / \text{ft}^3$$

$$Q_b = 2 \text{ cm}^3 / \text{sec} = 2 \times 3.531467 \text{ E}^{-5} \text{ ft}^3 / \text{sec}$$

$$W = \gamma_b Q_b = 5.289431 \text{ E}^{-6} \text{ lb} / \text{sec}$$

$$\mu = 0.02 \times 2.088543 \text{ E}^{-5} \text{ lb sec} / \text{ft}^2$$


$$= 4.177086 \text{ E}^{-7} \text{ lb sec} / \text{ft}^2$$

$$BB_p^a = \frac{1.621139 \text{ RL}}{6 g d_p^5 M} = \frac{1.621139 \times 1545 \times 0.0656168}{6 \times 32.2 \times 0.023414^5 \times 28.97}$$

$$= 4172824$$

$$\begin{aligned}
 f_p &= \frac{p_1^2 - p_2^2}{6W^2 B B_p^a z_2 T_2} \\
 &= \frac{3069.36^2 - 2116.80^2}{6 \times (5.289431E-6)^2 \times 4172824 \times 1 \times 530} \\
 &= 0.133065E8
 \end{aligned}$$

The coordinate  $(R_{NP}, f_p) = (21.385242, 0.0133065E8)$  locates very well in a previous graph of  $f_p$  versus  $R_{NP}$  that was generated by (Ohirhian, 2008). The points plotted in the graph were obtained by flowing water through synthetic tight consolidated cores. The plot is reproduced here as follows.

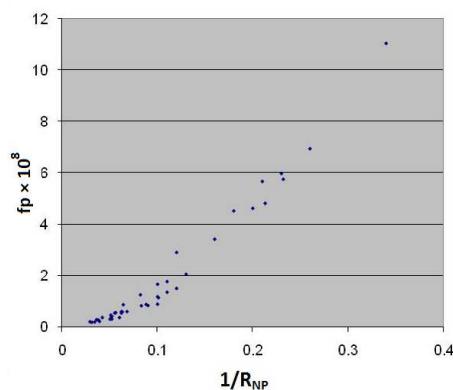

Plot of  $f_p$  versus  $R_{NP}$  for Porous Media

### Assignment

Use the data of example 4 to calculate the dimensionless friction factor ( $f_p$ ) considering the core to be vertical

### Conclusions

- (1) The Darcy law as presented in API code 27 has been derived from the laws of fluid mechanics
- (2) New general differential equations applicable to horizontal, uphill and downhill flow of gas through porous media have been developed.
- (3) The Runge-Kutta algorithm has been used to provide accurate solutions to the differential equations developed in this work.
- (4) The solution to the differential equation shows that inclination has the effect of reducing laboratory measured values of gas permeability and dimensionless friction factor- the longer a core the more the reduction of measured permeability / dimensionless friction factor.

## Nomenclature

$dp$  = Incremental pressure drop

$d\ell_p$  = Incremental length of porous  
medium

$Q$  = Volumetric flow rate

$V$  = Average velocity flowing fluid

$K'$  = Proportionality constant that is dependent on both fluid and rock properties

$k$  = Permeability of porous medium

$\mu$  = Absolute viscosity of flowing fluid

$\rho$  = Mass density of flowing fluid

$g$  = Acceleration due to gravity

$Z$  = Elevation of the porous medium above a datum. The + sign is used where the point of interest is above the datum the - sign is used where the chosen point is and below the datum

$\mu'$  = Effective viscosity of flowing fluid =  $\frac{\mu}{\phi}$

$p$  = Pressure

$\gamma$  = Specific weight of flowing fluid

$v$  = Average fluid velocity

$g$  = Acceleration due to gravity in a consistent set of units.

$d\ell_p$  = Incremental length of porous medium

$\theta$  = Angel of porous medium inclination with the horizontal, degrees

$dh_L$  = Incremental lost head

$C$  = Dimensionless constant which is dependent on the pore size  
distribution of porous medium

$c^1$  = Constant used for conversion of units. It is equal to 1 in a consistent set of units

$d_p$  = Diameter of porous medium =  $d\sqrt{\phi}$

$d$  = Diameter of cylindrical pipe

$\phi$  = Porosity of medium

$f_p$  = Dimensionless friction factor of porous medium that is dependent  
on the Reynolds number of porous medium.

$R_{Np}$  = Reynolds number of isotropic porous medium.

$A_p$  = Cross-sectional area of porous medium

$W$  = Weight flow rate of fluid

$\gamma_b$  = Specific weight of fluid at  $P_b$  and  $T_b$

$Q_b$  = Volumetric rate of fluid, measured at  $P_b$  and  $T_b$


- $P_b$  = Base pressure, absolute unit  
 $T_b$  = Base Temperature, absolute unit  
 $z_b$  = Gas deviation factor at  $p_b$  and  $T_b$  usually taken as 1  
 $G_g$  = Specific gravity of gas (air = 1) at standard condition  
 $M$  = Molecular weight of gas  
 $R$  = Universal gas constant  
 $A_1$  = Pipe cross sectional area at point 1  
 $v_1$  = Average fluid velocity at point. 1  
 $\gamma_1$  = Specific weight of fluid at point 1  
 $A_2$  = Pipe cross-sectional area at point 2  
 $v_2$  = Average fluid velocity at point 2  
 $\gamma_2$  = Specific weight of fluid at point 2  
 $T$  = Absolute temperature  
 $K$  = Constant for calculating the compressibility of a real gas  
 $p_1$  = Pressure at inlet end of porous medium  
 $p_2$  = pressure at exit end of porous medium  
 $\theta$  = Angle of inclination of porous medium with horizontal in degrees.  
 $z_2$  = Gas deviation factor at exit end of porous medium.  
 $T_2$  = Temperature at exit end of porous medium  
 $T_1$  = Temperature at inlet end of porous medium  
 $z_{av}$  = Average gas deviation factor evaluated with  $T_{av}$  and  $p_{av}$   
 $T_{av}$  = Arithmetic average temperature of the porous medium given by  $0.5(T_1 + T_2)$  and  $p_{av}$   
 $p_{av}$  = Average pressure

## References

- Amyx, J.W., Bass, D.M. & Whitting, R.L. (1960). Petroleum Reservoir Engineering - Physical Properties, Mc Graw Hill Book Company, pp73-78, New York.  
 Aires, F, (1962). Differential Equations, McGraw Hill Book Company, New York.  
 Belhj, H.A., Agha, K.R., Butt, S.D. & Islam, M.R. (2003). Journal of tech. papers, 27<sup>th</sup> Nigeria Annual Int. Conf. of Soc. of Pet. Engineers.  
 Brinkman, H.C. (1947) A calculation of the viscous force exerted by a flowing fluid on a dense swarm of particles. Appl. Soc. Res. A1, pp. 27-34.  
 Darcy, H. (1856). Les fontainer publignes de la ville de Dijoin, Dalmont,  
 Forchheimer, P.Z. (1901). Wasserbewegung durch Boden, ZVDI, 45, PP. 1781  
 Giles, R.V., Cheng, L. & Evert, J. (2009). Schaum's Outline Series of Fluid Mechanics and Hydraulics, McGraw Hill Book Company, New York.  
 LeRosen, A. L. (1942). Method for the Standardization of Chromatographic Analysis, J. Amer. Chem. Soc., 64, 1905-1907  
 Matter, L.G., Brar, S. & Aziz, K. (1975). "Compressibility of Natural Gases, Journal of Canadian Petroleum Technology", pp. 77-80.

- Muskat, M. (1949). "Physical Principles of Oil Production", p. 142, McGraw-Hill Book Company, Inc., New York.
- Nutting, P.G. (1930). Physical Analysis of Oil Sands, Bulletin of American Association of Petroleum Geologists, 14, 1337.
- Ohirhian, P.U. (2008). A New Dimensionless Friction Factor for Porous Media, Journal of Porous Media, Volume 11, Number 5.
- Ohirhian, P.U. (2009). Equations for the z-factor and compressibility of Nigerian Natural gas, Advanced Materials Research, Vols. 62-64, pp. 484-492, Trans Tech Publications, Switzerland
- Vibert. T. (1939). Les gisements de bauxite de l'Indochine, Génie Civil 115, 84.

IntechOpen

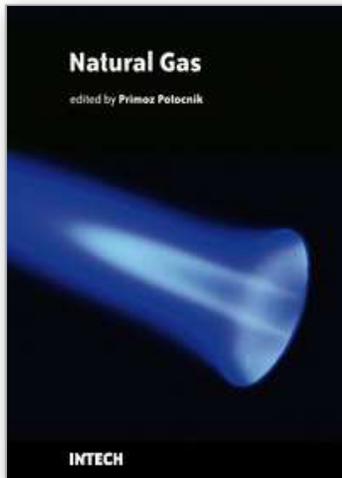

## **Natural Gas**

Edited by Primož Potočnik

ISBN 978-953-307-112-1

Hard cover, 606 pages

**Publisher** Sciyo

**Published online** 18, August, 2010

**Published in print edition** August, 2010

The contributions in this book present an overview of cutting edge research on natural gas which is a vital component of world's supply of energy. Natural gas is a combustible mixture of hydrocarbon gases, primarily methane but also heavier gaseous hydrocarbons such as ethane, propane and butane. Unlike other fossil fuels, natural gas is clean burning and emits lower levels of potentially harmful by-products into the air. Therefore, it is considered as one of the cleanest, safest, and most useful of all energy sources applied in variety of residential, commercial and industrial fields. The book is organized in 25 chapters that cover various aspects of natural gas research: technology, applications, forecasting, numerical simulations, transport and risk assessment.

### **How to reference**

In order to correctly reference this scholarly work, feel free to copy and paste the following:

Peter Ohirhian (2010). Steady State Compressible Flow in Porous Media, Natural Gas, Primož Potočnik (Ed.), ISBN: 978-953-307-112-1, InTech, Available from:  
<http://www.intechopen.com/books/natural-gas/steady-state-compressible-flow-in-porous-media>

**INTECH**  
open science | open minds

### **InTech Europe**

University Campus STeP Ri  
Slavka Krautzeka 83/A  
51000 Rijeka, Croatia  
Phone: +385 (51) 770 447  
Fax: +385 (51) 686 166  
[www.intechopen.com](http://www.intechopen.com)

### **InTech China**

Unit 405, Office Block, Hotel Equatorial Shanghai  
No.65, Yan An Road (West), Shanghai, 200040, China  
中国上海市延安西路65号上海国际贵都大饭店办公楼405单元  
Phone: +86-21-62489820  
Fax: +86-21-62489821

© 2010 The Author(s). Licensee IntechOpen. This chapter is distributed under the terms of the [Creative Commons Attribution-NonCommercial-ShareAlike-3.0 License](#), which permits use, distribution and reproduction for non-commercial purposes, provided the original is properly cited and derivative works building on this content are distributed under the same license.

IntechOpen

IntechOpen