

We are IntechOpen, the world's leading publisher of Open Access books Built by scientists, for scientists

6,900

Open access books available

186,000

International authors and editors

200M

Downloads

Our authors are among the

154

Countries delivered to

TOP 1%

most cited scientists

12.2%

Contributors from top 500 universities



WEB OF SCIENCE™

Selection of our books indexed in the Book Citation Index
in Web of Science™ Core Collection (BKCI)

Interested in publishing with us?
Contact book.department@intechopen.com

Numbers displayed above are based on latest data collected.
For more information visit www.intechopen.com



Application of Response Surface Methodology to Optimize Alkali Concentration, Corn Stover Particle Size, and Extruder Parameters for Maximum Sugar Recovery

Chinnadurai Karunanithy and Kasiviswanathan Muthukumarappan
Agricultural and Biosystems Engineering, South Dakota State University
South Dakota
USA

1. Introduction

The National Research Council (2000) has set a goal for the biobased industry of providing at least 10% of liquid fuels by the year 2020 and providing 50% of liquid fuels by the year 2050. The 2007 Energy Act mandates the production of 21 billion gallons of biofuels from non-corn starch materials by 2022. Brazil and the US produce about 60% of the world's ethanol, exploiting sugarcane and corn, respectively. Economics and limitation in grain supply lead to search for alternative resources. Lignocellulosic materials are the most abundant renewable resources on earth (Lynd et al., 2005) and cheaper than corn. Among the crop residues, corn and wheat are the most abundant in the US, roughly 96% of the total biomass (Little, 2001). Corn stover is being considered as one of the main renewable feedstocks for conversion into fuels and chemicals. According to Kadam and McMillon (2003), about 80-100 dry tons of corn stover/year can be utilized for ethanol production. It has been estimated that approximately 256 million dry tons of corn stover will be available in the year 2030 due to collection technologies improvement and a steady yield increase (Perlack et al., 2005). Moreover, corn stover is projected as the feedstock in two of the six commercial-scale lignocellulosic bio-refineries supported by the US Department of Energy (Service, 2007).

Ethanol production from biomass is quite different from the process used for corn grain, because the carbohydrates in biomass are more difficult for hydrolytic enzymes to access than the starch in grain (Gibbons et al., 1986). Unlike corn grain, biomass is composed of 40–50% cellulose, 25–35% hemicellulose, and 15–20% lignin (Saha & Bothast, 1997). Because of the complex structure of biomass and its recalcitrant nature, an additional step called pretreatment is required for ethanol production from biomass in addition to the steps involved in corn ethanol production. The purposes of pretreatment are to open up the biomass structure, to increase accessible surface area, to reduce the cellulose crystallinity, and to increase the porosity, pore size, and pore volume. Extensive pretreatment effort has been made using several methods on different biomasses with varying degrees of success. Acid, alkali, hydrothermal (steam, steam explosion, hot water, pH controlled hot water), and ammonia fiber expansion (AFEX) are a few well recognized pretreatment methods.

Despite biomass pretreatment research of more than three decades, no perfect conversion technology has been established for biofuels production from biomass on a commercial scale (de Leon & Coors, 2008).

Extrusion is a well known technology in the processed food, feed, and plastic industries. An extruder has the ability to provide high shear, rapid heat transfer, effective and rapid mixing in a short residence time, as well as adaptability to many different processes – all in a continuous process. A few extrusion pretreatments (Dale et al., 1999; de Virje et al., 2002; Karunanithy et al., 2008; Karunanithy & Muthukumarappan, 2010a, 2010b, 2010c, 2011a, 2011b, 2011c; Lee et al., 2009; Muthukumarappan & Julson, 2007) showed a significant improvement on sugar recovery from corn stover, switchgrass, miscanthus, prairie cord grass, big bluestem, and Douglas fir through enzymatic hydrolysis. Potential fermentation inhibitors such as furfural and HMF were not reported in any of the above studies. Karunanithy and Muthukumarappan (2011a) achieved 85.7, 87.5, and 86.3% of glucose, xylose, and combined sugar recovery, respectively for the optimized pretreatment condition of 180°C barrel temperature, 155 rpm screw speed, 20% wb moisture content, and corn stover particle size 8 mm. The literatures report a sugar recovery of more than 90% or near quantitative using dilute acid (Lloyd & Wyman, 2005; Yan et al., 2009; Zhu et al., 2004, 2005), lime (Kim & Holtzapple, 2005), compressed hot water (Liu & Wyman, 2005), steam pretreatment (Bura et al., 2009), steam explosion (Elander et al., 2009; Tucker et al., 2003), a combination of acid and alkali (Varga et al., 2002), ammonia recycle process (Kim et al., 2003) and AFEX (Chundawat et al., 2007). These results show that there still is room to improve sugar recovery from corn stover when pretreated in extrusion in combination with other pretreatment methods.

In general, alkali pretreatment results in less degradation of the sugar compared to acid pretreatments. Considering the construction material of the extruder, addition of acid would lead to corrosion problem; therefore, extruder screws and barrel should be fabricated using acid-resistant stainless steel alloy such as AL6XN (Miller & Hester, 2007). Alkali pretreatment can be as simple as soaking the biomass in NaOH at room temperature or as complicated as treating the biomass in AFEX. Among sodium, calcium, potassium, and ammonium hydroxides, sodium hydroxide is the most studied alkali in biomass pretreatment (Elshafei et al., 1991; MacDonald et al., 1983) and effective also (Keshwani, 2009). MacDonald et al (1983) obtained an overall yield of 77.5% from dilute NaOH pretreatment at a high temperature, whereas Elshafei et al (1991) achieved a theoretical maximum yield of cellulose when corn stover was soaked in 1.0 M NaOH for 24 h at room temperature. Recently, Gupta (2008) reported about 94% glucose digestibility when corn stover was pretreated with 1.5% NaOH at 60°C for 24 h.

Barrel temperature and screw speed are important extruder parameters, which can affect sugar recovery. Biomass size reduction has become an integral part of biomass pretreatment. Studies have shown that the particle size influences the diffusion kinetics (Kim & Lee, 2002), the effectiveness of pretreatment (Chundawat et al., 2007), the enzymatic hydrolysis rate, the rheological properties (Chundawat et al., 2007; Desari & Bersin, 2007), lignin removal (Hu et al., 2008), the sugar yield (Chang et al., 2001; Hu et al., 2008; Yang et al., 2008), acetic acid formation (Guo et al., 2008), and the power requirement for size reduction (Cadoche & Lopez, 1989; Mani et al., 2004; van Walsum et al., 1996). It is a well known that alkali acts as delignification agent at low concentration without degrading the carbohydrates. Hence, the extruder barrel temperature, screw speed, corn stover particle size, and alkali (NaOH) concentration are the independent variables selected for this study.

Optimization of pretreatment conditions is one of the most important stages in the development of an efficient and economic pretreatment method. The traditional one-factor-at-a-time approach is time consuming; moreover, the interactions between independent variables are not considered. Response surface methodology (RSM) is an effective optimization tool wherein many factors and their interactions affecting the response can be identified with fewer experimental trials than one-factor-at-a-time experiment. RSM has been widely used in various fields ranging from food process operations including extrusion (Altan et al., 2008; Jorge et al., 2006), food product development, media composition in biotechnology to bioprocessing such as enzymatic hydrolysis and fermentation. Recently, RSM has been successfully applied to biomass pretreatment by many researchers (Canettieri et al., 2007; Kim & Mazza, 2008; Lu et al., 2007; Neureiter et al., 2002; Rahman et al., 2007; Xin & Saka, 2008). Earlier extrusion pretreatment studies conducted by the authors yielded encouraging results and however, the extrusion factors including alkali concentration were not optimized. The following are the objectives of the present study: 1) to understand and optimize the effect of extruder parameters such as barrel temperature and screw speed, biomass particle size, and alkali (NaOH) concentration for maximum sugar recovery using RSM and adopting a central composite rotatable design (CCRD), and 2) to propose a mathematical model to predict glucose, xylose, and combined sugar recovery from corn stover.

2. Materials and methods

2.1 Experimental design

A central composite rotatable design (CCRD) with four independent variables was used to study the response pattern and to determine the optimum combination of temperature, screw speed, alkali concentration, and particle size for maximizing the sugar recovery from corn stover. The CCRD combines the vertices of the hypercube whose coordinates are given by a 2^n factorial design with star points. The star points provide the estimation of curvature of the nonlinear response surface. The experimental design was developed using Design Expert 7.1.6 (2002), which resulted in 30 runs, in addition 6 more center points were added to allow for the estimation of the pure error sum squares. The 36 experiments (16 factorial, 8 star, and 12 center points) were randomized to maximize the effects of unexplained variability in the observed responses due to extraneous factors. Independent variable levels were selected based on a previous and one-factor-at-a-time experiment. The independent variables were coded according to the following equation

$$x_i = (X_i - X_0) / \Delta X_i \quad (1)$$

where x_i and X_i are the dimensionless and actual values of the independent variable i , X_0 is the actual value of the independent variable at the center point, and ΔX_i is the step change of X_i corresponding to a unit variation of the dimensionless value. The variables optimized included barrel temperature (45 to 225°C), screw speed (20 to 200 rpm), alkali concentration (0.5 to 2.5%), and particle size (2 to 10 mm) each at five levels: -2, -1, 0, 1, and 2 and shown in Table 2.

2.2 Biomass preparation

Corn stover obtained from a local farm was ground in a hammer mill (Speedy King, Winona Attrition Mill Co, MN) using 2, 4, 6, 8, and 10 mm sieves to understand the influence of

particle size on sugar recovery. Compositional analysis of corn stover such as glucose, xylose, mannose, arabinose, lignin, and ash was done following Sluiter et al (2008a, 2008b) and reported in the mass balance diagram.

Alkali (NaOH) solutions of different concentrations (0.5, 1.0, 1.5, 2.0, and 2.5 % w/v) were prepared. It was found that corn stover required nine times of solution than that of corn stover weight for complete soaking, which is equivalent to 10% solids loading rate. The different particle size of corn stover was soaked in different alkali concentrations as given in the experimental design for 30 min at room temperature. The black liquid was drained out using cheese cloth followed by manual squeezing to remove excess moisture. Moisture content of the biomass samples was determined as described by Sluiter et al (2008c). The moisture content of alkali soaked samples was in the range of 75-78% wb.

2.3 Extrusion pretreatment

Extrusion was performed using a single screw extruder (Brabender Plasti-corder Extruder Model PL 2000, Hackensack, NJ), which had a barrel length to screw diameter ratio (l/d) of 20:1. In order to have a smooth biomass (plug) flow into the die section, the screw discharge end was fitted with conical metal piece. A screw with 3:1 compression ratio was selected based on a previous study (Karunanithy & Muthukumarappan, 2010a). The single screw extruder was fitted to a 7.5 hp motor, which had a provision to adjust the screw speed from 0 to 210 rpm. The extruder barrel had provisions to control the temperature of the feed and transition zone in both barrel and die section. The extruder barrel temperature and the screw speed were controlled by a computer connected to the extruder. Extruder feeding was done manually. Compressed air was supplied as a cooling agent along the barrel length. Once the barrel temperature stabilized, about 500 g of biomass was extruded under each pretreatment condition, divided into two batches accounting for variations due to extruder operation, and considered replicates. The mean residence time varied between 30 and 90 sec depending upon the screw speed.

2.4 Enzymatic hydrolysis

Enzymatic hydrolysis of pretreated samples (0.3 g in 10 mL hydrolysis volume) was carried out using 0.1M, pH 4.8 sodium citrate buffer for 72 h at 50°C and 150 rpm as described by Selig et al (2008). Based on the literature survey and earlier study, the amount of cellulase (Celluclast 1.5L, activity 70 FPU/g) enzyme was decided to be 15 FPU/g of dry matter. The ratio of cellulase to β -glucosidase (Novo-188, activity 250 CBU/g) was maintained at 1:4 based on earlier study (Karunanithy & Muthukumarappan, 2010b). All these enzymes were provided by Novozyme (Krogshoejvej, Denmark). After hydrolysis, the samples were kept in boiling water for 10 min to inactivate the enzyme action. The supernatant was centrifuged with 16060 g force (13000 rpm for 15 min) and then frozen twice before injecting into the HPLC to remove the impurities which contribute to the pressure increase in the HPLC system. Soluble sugar was quantified using HPLC (Agilent Technologies, Santa Clara, CA; Bio-Rad Aminex 87H column, Hercules, CA) with a mobile phase of 0.005M H₂SO₄ at a flow rate of 0.6 mL/min at 65°C and a sample volume of 20 μ L as mentioned by Sluiter et al (2008d). The sugar concentration obtained from chromatogram was divided by dry weight of biomass taken for enzymatic hydrolysis in order to know the percentage of different sugars with respect to total biomass. Glucose and xylose are the major sugars present in the biomass as compared to arabinose. Instead of reporting arabinose separately, it was added

with glucose and xylose and reported as combined sugar. The sugar recovery reported in this chapter was after enzymatic hydrolysis of the pretreated samples.

$$Y_i, \% = \frac{S_{ip}}{S_{ir}} * 100 \quad (2)$$

$$Y_c, \% = \frac{\sum S_{ip}}{\sum S_{ir}} * 100 \quad (3)$$

Where

Y_i - individual sugar recovery, %

Y_c - combined sugar recovery, %

S_{ip} - individual sugar obtained from hydrolyzate of pretreated samples through HPLC

S_{ir} - individual sugar from raw material

2.5 Statistical analysis

The second order polynomial equation was used to describe the effect of independent variables in terms of linear, quadratic, and interactions. The proposed model for the response (Y_i) was:

$$Y_i = b_0 + \sum_{i=1}^4 b_i X_i + \sum_{i=1}^4 b_{ii} X_i^2 + \sum_{i=1}^3 \sum_{j=i+1}^4 b_{ij} X_i X_j + \varepsilon \quad (4)$$

where Y_i is the predicted response; b_0 is the interception coefficient; b_i , b_{ii} , and b_{ij} are linear, quadratic, and interaction terms; ε is the random error, and X_i is the independent variables studied. Design Expert 7.1.6 software was used for regression and graphical analysis of the data obtained. Statistical analysis of the model was performed to evaluate the analysis of variance.

The quality of fit of second order equation was expressed by the coefficient of determination R^2 and its statistical significance ($\alpha = 0.05$) was determined by the F test. The individual effect of each variable and also the effects of the interaction were determined. Optimization (maximizing sugar recovery) of the fitted polynomial was determined using numerical optimization contained in the Design Expert 7.1.6. After optimizing the pretreatment conditions using RSM, validation was done by extruding corn stover at two different optimum conditions of barrel temperature, screw speed, alkali concentration, and particle size from the numerical solution, depending on the particle size, due to availability of the standard sieve size.

3. Results and discussion

3.1 Solid loss and washing of the pretreated corn stover

Many researchers (Dawson & Boopathy, 2007; Kaar & Holtzapfel, 2000; Titgemeyer et al., 1996) have reported washing of the biomass with different medium after alkali pretreatment; however, it may not be necessary if the alkali concentration is low enough. According to Novozymes biomass kit, most of the enzymes have optimum activity between a pH of 4.5 to 6.5 at 45-70°C. When different biomasses soaked with different alkali concentration, the sample prepared for enzymatic hydrolysis (after adding citrate buffer, DI

water, and enzymes) had a pH of 4.8 to 5.4, which is well within the range of Novozyme's recommendations. Depending upon the alkali concentration and particle size, a sugar recovery of 35-45% was recorded. However, the washed samples had lower sugar recovery (due to loss of sugar about 5-7%) than that of unwashed samples.

Considering the solid loss (15%) and delignification (40%) during alkali soaking, the sugar recovery was calculated and shown in the mass balance diagram. The literature values of solid loss and delignification varied from 10.0-67.3 and 27.7-96.0%, respectively, depending upon the alkali usage and the pretreatment conditions employed on corn stover as listed in Table 1. The reason for lower solid loss and delignification is due to room temperature when compared to most of methods mentioned in the table.

3.2 Effect of independent variables on sugar recoveries

The experimental glucose, xylose, and combined sugar recoveries from different treatment combinations are presented in Table 2. The proposed quadratic models in terms of actual variables are given below for glucose (Y_G), xylose (Y_X), and combined sugar (Y_C) recovery, where X_1 , X_2 , X_3 , and X_4 represent barrel temperature ($^{\circ}\text{C}$), screw speed (rpm), alkali concentration (% w/v), and particle size (mm) of corn stover, respectively. Similar equations were reported for acid hydrolysis of sugarcane bagasse (Neureiter et al., 2002), oil palm empty fruit bunch (Rahman et al., 2007), eucalyptus (Canettieri et al., 2007), for concentrated acid pretreatment of pine wood (Miller & Hester, 2007), acid catalyzed fractionation and enzymatic hydrolysis of flax shives (Kim & Mazza, 2008), hot-compressed water pretreatment of Japanese beech hydrolysis (Xin & Saka, 2008), and extrusion pretreatment of corn stover (Karunanithy & Muthukumarappan, 2011a). Those equations predict the responses well with high R^2 and low probability values.

$$Y_G = -206.7 + 0.9664X_1 + 0.4352X_2 + 192.8X_3 + 17.76X_4 + 0.0024X_1X_2 - 0.0172X_1X_3 + 0.0178X_1X_4 - 0.3881X_2X_3 - 0.0190X_2X_4 + 3.8485X_3X_4 - 0.0045X_1^2 - 0.0009X_2^2 - 50.503X_3^2 - 1.7979X_4^2 \quad (5)$$

$$Y_X = -141.13 + 0.6135X_1 + 0.4986X_2 + 168.87X_3 + 8.895X_4 + 0.0014X_1X_2 - 0.0803X_1X_3 + 0.0245X_1X_4 - 0.1693X_2X_3 + 1.6732X_3X_4 - 0.0029X_1^2 - 0.0021X_2^2 - 46.837X_3^2 - 1.094X_4^2 \quad (6)$$

$$Y_C = -190.54 + 0.8375X_1 + 0.5593X_2 + 186.72X_3 + 15.47X_4 + 0.0021X_1X_2 - 0.0962X_1X_3 + 0.0228X_1X_4 - 0.3206X_2X_3 - 0.0239X_2X_4 + 3.041X_3X_4 - 0.0039X_1^2 - 0.0015X_2^2 - 48.92X_3^2 - 1.5658X_4^2 \quad (7)$$

The regression coefficient, standard error, F, and p values are shown in Table 3. All the independent variables had a significant influence on sugar recoveries, as evident from their p values in Table 3. All the independent variables had a positive influence on all the sugar recoveries, as evident from the proposed model equations. The magnitude of the terms indicates the order of influence on sugar recoveries i.e., alkali concentration, particle size, barrel temperature, and screw speed. Not only the linear terms of independent variables but also their quadratic terms contributed to glucose, xylose, and combined sugar recovery, as evident from equation 5 and 7. Again, the difference in magnitude of the quadratic terms explains which variable was dominant for sugar recoveries.

Pretreatment	Alkali used	Pretreatment conditions	Biomass size, mm	Solid loss, %	Delignification, %	Glucose, %	Xylose, %	Reference
Alkali	1-10% NaOH	1h autoclaving	~ 3.0	56.2-67.3	91.0-95.9	79.4		Varga et al., 2002
Alkali	10% NaOH	2h autoclaving	2.0	NR	NR	0.36g/g DM		Croftcheck & Montross, 2004
Alkali	1-5% NaOH	60 C, 24 h	0.5-2.2	26.2-47.6	64.4-81.4	82-99.8+	59.5-71.2+	Gupta, 2008
Alkali	1% NaOH	25 C, 24 h	0.5-2.2	16	41.8	65.3+	49.3+	Gupta, 2008
Alkali	1% NaOH+5% H ₂ O ₂	25 C, 24 h		10	27.7	49.1+	31.8+	Gupta, 2008
Alkali (NaOH)	2%		< 2.0	41.4	73.9	81.2		Chen et al., 2009
Bayer process sand pretreatment	0.053-1.007 g NaOH equiv/g	; 20-0.093 g/g; 0- and 0.093 g/g, ² O/g weeks, aeration	<1.0	14.5-27.0	4-66.7	93.2	94.5	Rodgers et al., 2009
Lime	0.4 g Ca(OH) ₂ /g		<2.0	32.3	34.8	50		Chen et al., 2009
Lime	0.5 g Ca(OH) ₂ /g		6.0	NR	43.6-47.7	91.3	51.8	Kim & Holtzapple, 2005
Lime	0.075 g Ca(OH) ₂ /g	120 C, 4 h, 5 g H ₂ O/g	<0.18->0.84	33.0	39.5	88.0	87.7	Teramoto et al., 2009
Wet oxidation	2 g/L Na ₂ CO ₃		~ 3.0	24.6-51.4	49.4-59.7	71.0-85.0		Kim & Lee, 2005a
ARP	15 wt% NH ₃	bar O ₂ 170 C, 1.5 h, 5 ml/min, 2.3 MPa	0.5-2.2	38.4-46.4	70.0-85.0	92.5-99		Kim et al., 2003
ARP	15 wt% NH ₃	170 C, 1.5 h, 5 ml/min, 2.3/2.5 MPa	0.5-2.2	38.4-46.4	67.9-84.7	71.7-93.4		Kim & Lee, 2005a, 2006
ARP	1 solid:3.3 liquid 15 wt% NH ₃	170 C, 10 min,	0.5-2.2	47.0-57.0	75.0-81.0	98.6	48.1	Gupta et al., 2007
Low liquid ammonia recycle	3.3 mL of 15 wt% NH ₃ /g		0.5-2.2	41.0-47.0	59.0-70.0	86-95	71-86	Kim et al., 2006
Aqueous ammonia percolation	NH ₃	Room temperature, 10 days	0.5-2.2	NR	55.0-74.0	86-92	72-84	Kim & Lee, 2005b
Aqueous ammonia soaking	1 solid:6 liquid 15 wt% NH ₃		0.5-2.2	22.6-32.7	50.0-77.0	85	78	Kim & Lee, 2007
Aqueous ammonia soaking	1 solid:8 liquid 15 wt% NH ₃		0.5-2.2	NR	64.7	86.7	35.1	Kim & Lee, 2007
AFEX	0.86-2 g NH ₃ /g	Twin screw extruder, 10:1	<2.0	NR	NR	63-77*		Dale et al., 1999
AFEX	1 corn stover:1 NH ₃	db	6.0	NR	NR	75-90	50-70	Teymouri et al., 2005

* ruminant digestibility + enzymatic digestibility

Table 1. Different alkali pretreatment methods employed on corn stover and their results as reported in literature

Treat	Temp	Speed	Alkali	PS	Glucose, %			Xylose, %			Combined sugar, %		
					Obsd	Pred	Resl	Obsd	Pred	Resl	Obsd	Pred	Resl
1	0(135)	0(110)	0(1.5)	0(6)	91.3	89.0	2.3	86.5	87.0	-0.5	92.0	89.2	2.8
2	1(180)	-1(65)	1(2.0)	-1(4)	61.6	61.7	-0.1	64.4	63.1	1.3	60.4	59.8	0.6
3	0(135)	0(110)	0(1.5)	0(6)	86.3	89.0	-2.7	84.1	87.0	-2.9	88.9	89.2	-0.3
4	1(180)	-1(65)	1(2.0)	1(8)	87.0	85.1	1.9	75.0	74.8	0.2	83.0	81.1	1.9
5	0(135)	0(110)	0(1.5)	0(6)	90.0	89.0	1.0	87.2	87.0	0.2	87.9	89.2	-1.3
6	0(135)	0(110)	0(1.5)	0(6)	87.8	89.0	-1.2	85.1	87.0	-1.9	87.4	89.2	-1.8
7	1(180)	1(155)	1(2.0)	-1(4)	43.7	44.3	-0.6	56.8	56.3	0.5	48.1	47.9	0.2
8	-1(90)	-1(65)	-1(1.0)	-1(4)	52.8	51.9	0.9	57.8	57.9	-0.1	55.3	54.5	0.8
9	0(135)	0(110)	0(1.5)	0(6)	88.1	89.0	-0.9	90.0	87.0	3.0	90.3	89.2	1.1
10	-1(90)	1(155)	-1(1.0)	-1(4)	48.9	50.0	-1.1	57.0	54.8	2.2	54.3	54.3	0
11	0(135)	0(110)	0(1.5)	2(10)	68.3	69.3	-1.0	70.5	71.7	-1.2	69.7	71.0	-1.3
12	0(135)	2(200)	0(1.5)	0(6)	67.9	68.2	-0.3	62.5	63.7	-1.2	65.8	66.6	-0.8
13	1(180)	1(155)	-1(1.0)	1(8)	61.8	61.7	0.1	66.0	63.6	2.4	65.4	63.3	2.1
14	-1(90)	-1(65)	1(2.0)	-1(4)	77.7	77.0	0.7	74.8	74.7	0.1	76.9	77.1	-0.2
15	0(135)	0(110)	0(1.5)	0(6)	88.0	89.0	-1.0	90.1	87.0	3.1	89.3	89.2	0.1
16	0(135)	0(110)	2(2.5)	0(6)	49.2	50.7	-1.5	47.0	49.1	-2.1	48.3	50.3	-2.0
17	0(135)	0(110)	0(1.5)	0(6)	89.2	89.0	0.2	85.9	87.0	-1.1	89.4	89.2	0.2
18	0(135)	0(110)	0(1.5)	0(6)	87.8	89.0	-1.2	85.5	87.0	-1.5	86.9	89.2	-2.3
19	-2(45)	0(110)	0(1.5)	0(6)	49.6	51.6	-2.0	59.1	61.6	-2.5	55.6	57.6	-2.0
20	0(135)	0(110)	0(1.5)	0(6)	90.8	89.0	1.8	87.8	87.0	0.8	91.1	89.2	1.9
21	-1(90)	1(155)	-1(1.0)	1(8)	46.6	44.7	1.9	47.1	47.6	-0.5	47.1	46.6	0.5
22	1(180)	-1(65)	-1(1.0)	1(8)	49.8	51.0	-1.2	57.0	58.5	-1.5	53.1	55.0	-1.9
23	-1(90)	-1(65)	1(2.0)	1(8)	95.4	94.1	1.3	80.1	77.5	2.6	92.1	90.2	1.9
24	0(135)	-2(20)	0(1.5)	0(6)	92.2	94.4	-2.2	74.7	76.9	-2.2	85.0	87.2	-2.2
25	0(135)	0(110)	0(1.5)	0(6)	89.7	89.0	0.7	87.0	87.0	0	89.3	89.2	0.1
26	0(135)	0(110)	0(1.5)	0(6)	89.7	89.0	0.7	86.6	87.0	-0.4	88.2	89.2	-1.0
27	1(180)	-1(65)	-1(1.0)	-1(4)	45.3	43.0	2.3	56.3	53.5	2.8	48.4	45.8	2.6
28	0(135)	0(110)	-2(0.5)	0(6)	25.2	26.3	-1.1	30.1	31.2	-1.1	29.4	30.4	-1.0
29	0(135)	0(110)	0(1.5)	-2(2)	49.7	51.2	-1.5	65.2	67.3	-2.1	55.7	57.4	-1.7
30	-1(90)	1(155)	1(2.0)	-1(4)	43.2	40.2	3.0	58.7	56.4	2.3	51.0	48.1	2.9
31	-1(90)	-1(65)	-1(1.0)	1(8)	54.8	53.5	1.3	56.1	54.0	2.1	57.0	55.4	1.7
32	1(180)	1(155)	-1(1.0)	-1(4)	61.0	60.5	0.5	60.2	62.0	-1.8	62.0	62.8	-0.8
33	-1(90)	1(155)	1(2.0)	1(8)	48.8	50.3	-1.5	55.5	55.9	-0.4	51.9	52.6	-0.7
34	2(225)	0(110)	0(1.5)	0(6)	52.6	53.2	-0.6	65.3	66.1	-0.8	56.0	57.0	-1.0
35	0(135)	0(110)	0(1.5)	0(6)	89.4	89.0	0.4	88.3	87.0	1.3	90.3	89.2	1.1
36	1(180)	1(155)	1(2.0)	1(8)	61.7	60.9	0.8	65.5	64.7	0.8	60.8	60.6	0.2

Table 2. Experimental design showing both coded and actual values of variables, observed and predicted responses

Factor	Glucose					Xylose					Combined sugar				
	Coefft	Std error	F value	P value	Coefft	Std error	F value	P value	Coefft	Std error	F value	P value	Coefft	Std error	P value
Temp	-91.63	26.20	12.22	0.0021	-101.86	31.82	10.24	0.0043	-123.48	28.03	19.40	0.0002	-123.48	28.03	0.0002
SS	-504.27	26.20	370.35	< 0.0001	-220.44	31.82	47.98	< 0.0001	-416.36	28.03	220.59	< 0.0001	-416.36	28.03	< 0.0001
AC	-28664.90	741.11	1496.0	< 0.0001	-26607.8	900.03	873.97	< 0.0001	-27785.4	792.8	1228.0	< 0.0001	-27785.4	792.8	< 0.0001
PS	223.90	26.20	73.01	< 0.0001	96.48	31.82	9.19	0.0063	176.72	28.03	39.74	< 0.0001	176.72	28.03	< 0.0001
Temp*SS	4.86	0.45	112.00	< 0.0001	2.88	0.55	26.77	< 0.0001	4.27	0.49	75.64	< 0.0001	4.27	0.49	< 0.0001
Temp*AC	-32.29	9.19	12.33	0.0021	-36.13	11.16	10.47	0.0040	-43.27	9.83	19.36	0.0002	-43.27	9.83	0.0002
Temp*PS	1.60	0.45	12.21	0.0022	2.21	0.55	15.64	0.0007	2.05	0.49	17.48	0.0004	2.05	0.49	0.0004
SS*AC	-174.63	9.19	360.86	< 0.0001	-76.19	11.16	46.57	< 0.0001	-144.28	9.83	215.20	< 0.0001	-144.28	9.83	< 0.0001
SS*PS	-1.71	0.45	13.90	0.0012	-0.84	0.55	2.26	0.1473	-2.14	0.49	19.08	0.0003	-2.14	0.49	0.0003
AC*PS	76.96	9.19	70.09	< 0.0001	33.46	11.16	8.98	0.0069	60.81	9.83	38.23	< 0.0001	60.81	9.83	< 0.0001
Temp ²	-9.15	0.32	794.07	< 0.0001	-5.79	0.39	215.42	< 0.0001	-7.99	0.34	528.65	< 0.0001	-7.99	0.34	< 0.0001
SS ²	-1.92	0.32	34.97	< 0.0001	-4.18	0.39	112.24	< 0.0001	-3.08	0.34	78.64	< 0.0001	-3.08	0.34	< 0.0001
AC ²	-5050.28	130.01	1508.9	< 0.0001	-4683.70	157.89	879.93	< 0.0001	-4892.07	139.0	1237.0	< 0.0001	-4892.07	139.0	< 0.0001
PS ²	-7.19	0.32	489.56	< 0.0001	-4.37	0.39	122.99	< 0.0001	-6.26	0.34	324.43	< 0.0001	-6.26	0.34	< 0.0001

SS- screw speed AC- alkali concentration PS - particle size

Table 3. Coefficient values of the fitted model for different responses

As mentioned earlier, alkali soaked samples had moisture content in the range of 75-78% (wb). Friction is the main mode of material conveyance in a single screw extruder (Yeh & Jaw, 1998). Because water acts as lubricant in the extruder (Hayasi et al., 1992), an increase in moisture content resulted in decrease in the friction between the material, screw shaft, and barrel (Chen et al., 2009) resulted in less disturbance to cell wall of the corn stover. An increase in temperature and screw speed will introduce more energy to the material in the barrel, which would enhance the moisture evaporation at the exit (Yu et al., 2009); thereby, the disturbance to cell wall structure of the corn stover was high. An increase in corn stover particle size increased the glucose, xylose, and combined sugar recovery. Similar trends have been reported for corn stover pretreated with lime (Chang et al., 2001), hot water (Zeng et al., 2007) and wheat straw pretreated in wet oxidation (Pedersen & Meyer, 2009). It has been reported that sugar yield was more pronounced for larger particles (0.42-1.00 mm) than smaller particles (0.05-0.15 mm) due to topological changes of biomass in lime, hot water, and wet oxidation pretreatment (Chang et al., 2001; Pedersen & Meyer, 2009; Teramoto et al., 2009). An increase of sugar yield with decrease in particle size was reported for corn stover pretreated in AFEX (Chundawat et al., 2007) and wheat straw irradiated with 500 kGy (Yang et al., 2008). Kaar and Holtzapple (2000) found that particle size (<0.8-0.84 mm) had no effect on sugar yield from lime pretreatment of corn stover; more than 95% enzymatic hydrolysis yield was reported from SFEC pretreatment at 180/200°C irrespective of eucalyptus flour size (<2 or < 5 mm) by Teramoto et al (2009). Similarly Guo et al (2008) reported that feedstock size had no impact on the performance of dilute acid pretreatment at an input size below 1x 5 cm.

Not only linear and quadratic terms but also interactions terms were contributed to sugar recoveries as evident from Table 3 and equations 5-7. In order to visualize the interaction effects for glucose recovery, significant interaction response surfaces are shown in Figure 1a-f. As noted in the figure, all the possible interactions had a significant effect on glucose recovery. An increase in screw speed showed a clear negative trend on glucose recovery at low temperature, whereas the glucose recovery was same across screw speeds, as evident from the interaction of temperature with screw speed (Fig. 1a). The glucose recovery of 92% can be achieved with the barrel temperature between 130-140°C along with 1.5-1.8% alkali concentration as seen from the interaction of the temperature and alkali concentration (Fig. 1b). The effect of temperature was prominent with a larger particle size (8 mm) than that of a smaller particle (4 mm), as seen from their interaction surface plot (Fig.1c). The glucose recovery increased with an increase in particle size regardless of barrel temperature as it was clear from their interaction. As noted from the dome shape surface plot that the maximum glucose recovery can be obtained at the barrel temperature between 130 to 140°C. These results suggested that the temperature of 130-140°C would be sufficient to remove the moisture through vaporization; further increase in temperature may result in thermal softening of corn stover.

The alkali interaction with screw speed indicated that the alkali concentration of 1.5 to 1.7% would be good enough to obtain a glucose recovery of 95%. An alkali concentration up to 1.7% increased glucose recovery, a further increase in concentration of alkali resulted in decrease on glucose recovery, as evident from the interaction of alkali concentration with screw speed (Fig. 1d). The screw speed had a minimum effect on glucose recovery at a 1% alkali concentration; however, the screw speed effect was reversed at a 2% alkali concentration. The increase in screw speed showed a negative influence on glucose recovery

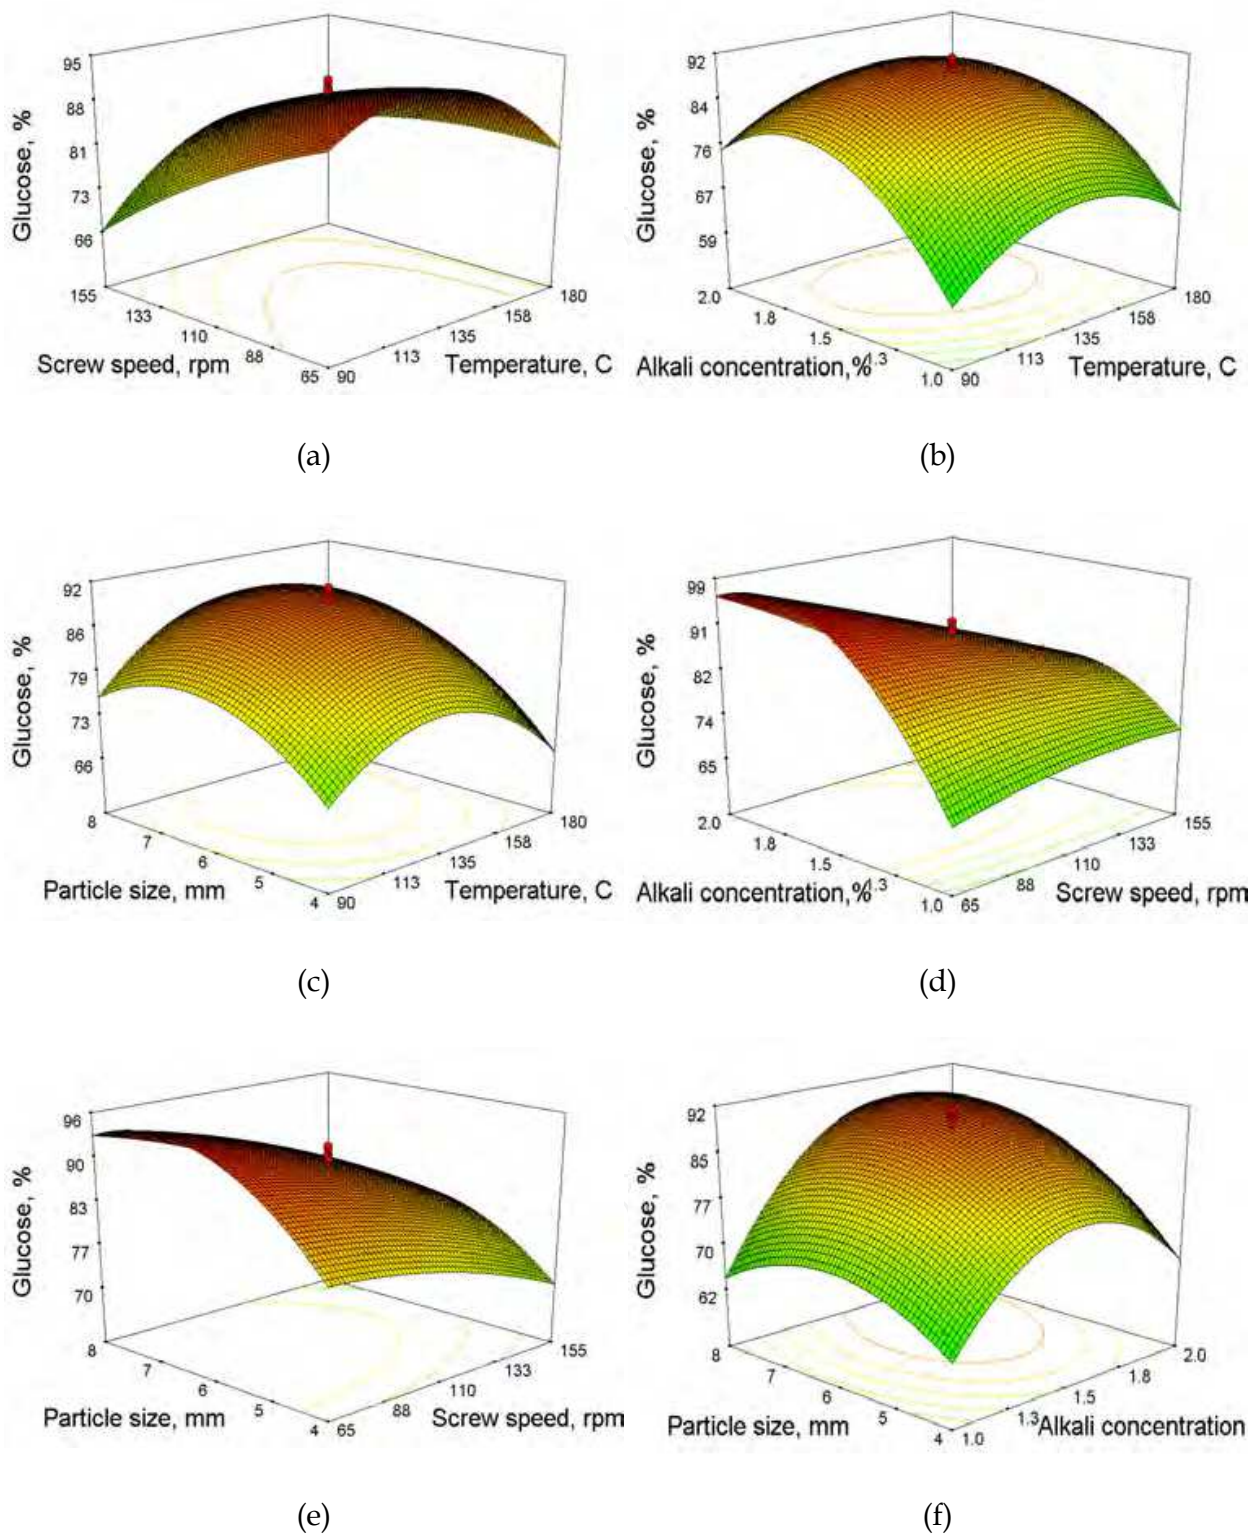


Fig. 1. Interaction effect of two independent variables on glucose recovery from corn stover (when other factors fixed at the center point: 135°C, 110, rpm, 1.5% w/w, and 6 mm)

regardless of the particle size as seen from their interaction (Fig. 1e). The particle size impact on glucose recovery was prominent at a lower screw (65 rpm) speed than that of higher screw speed, as observed in Fig. 1e. The glucose recovery increased with an increase in particle size as evident from the interaction of particle size with temperature or screw speed; however, when particle size interacting with alkali concentration, the glucose recovery increase was noticed till 7 mm only (Fig. 1f). Again, the alkali concentration of 1.5-1.7% would give the maximum of 92% glucose recovery as seen from the alkali concentration interaction with particle size. These results showed that more than 90% glucose recovery was possible at a low screw speed, alkali concentration between 1.5 to 1.7% with particle size of 6-7 mm.

Xylose response surface obtained for the significant interactions of the independent variables through model prediction are shown in Fig. 2a-e. Except screw speed interaction with particle size, all other interactions had an impact on xylose recovery from corn stover. The maximum xylose recovery was predicted at a low screw speed (65 rpm) and the barrel temperature between 130 and 140°C, as evident from the dome shape surface plot (Fig. 2a). The screw speed showed a prominent effect on xylose recovery at a lower screw speed (65 rpm) as compared to a higher screw speed (155 rpm) might be due to more residence time, as seen in Fig. 2a. As observed from the interaction of temperature with alkali concentration, an increase in alkali concentration and temperature had a positive influence on xylose recovery (Fig. 2b). However, the xylose recovery increase was significant till 1.7% alkali concentration and the barrel temperature between 130 and 140°C. The interaction of temperature and particle size indicated that the increase in particle size up to 7 mm exhibited a direct relation with xylose recovery (Fig. 2c). Again, this interaction confirmed that the barrel temperature of 130-140°C would result in a xylose recovery of 91%. Interaction of screw speed and alkali concentration for xylose recovery was similar to glucose recovery; alkali concentration had more prominent effect than that of screw speed. An increase in screw speed had a minimum effect on xylose recovery at an alkali concentration of 1%; however, its effect was clear at a 2% alkali concentration (Fig. 2d). The xylose recovery increased with an increase in alkali concentration till 1.7% and then the increase was negligible as evident from the surface plot (Fig. 2e). The effect of particle size on xylose recovery was similar across the alkali concentrations. The xylose recovery of 91% was predicted with alkali concentration of 1.7% regardless of the particle size. The barrel temperature of 130-150°C, low screw speed, 1.5 to 1.7% alkali concentration, and 6-7 mm corn stover particle size would result in a higher xylose recovery.

The predicted combined sugar response surfaces for the interactions among the independent variables are depicted in Fig. 3a-f. It can be noted that all the possible interactions had contributed for the combined sugar recovery. In general, the screw speed had a negative effect on combined sugar recovery, whereas the particle size had a positive effect, and this trend was also observed in glucose and xylose recovery. This trend might be attributed to a high mean residence time at a low screw speed and a greater resistance offered by a larger particle. The barrel temperature and alkali concentration were somewhere middle of the range results in a higher combined sugar recovery as similar to glucose and xylose recovery. Since the combined sugar is the addition of glucose, xylose, and arabinose, arabinose is being small amount and followed the same trend. The combined sugar recovery of more than 93% was possible depending upon the interaction of independent variables, which was similar to glucose and xylose recoveries.

3.3 Comparison of alkali soaking-extrusion results with other pretreatment methods

The maximum glucose (91.3%), xylose (86.5%), and combined sugar (92.0%) recovery was recorded for the treatment combination of 130°C, 110 rpm, 1.5% alkali concentration, and a 6 mm particle size. These pretreatment conditions differed from the maximum sugar recovery conditions (180°C, 155 rpm, 20% moisture content, and 8 mm) reported by Karunanithy and Muthukumarappan (2011b). These authors reported a glucose, xylose, and combined sugar recovery of 88, 90, and 90%, respectively, for optimum pretreated corn stover with only extrusion. The results were comparable to each other, indicating that extrusion alone is good enough to obtain about 90% sugar recovery. This might be due to loss of hemicellulose during alkali soaking; otherwise, the sugar recovery would have reached a near quantitative. Recently, in another study authors (2010a) have reported about 90% sugar recoveries for the pretreatment conditions (150°C, 150 rpm, 4 mm corn stover particle size with a 15% moisture content using 3:1 screw compression ratio). This might be due to a difference in the pretreatment conditions employed and possibly sugar loss during alkali soaking.

The present results were higher than the literature values for different biomasses. de Vrije et al (2002) reported 77% delignification, 69% glucose and 38% of xylose and arabinose conversion from a combined pretreatment of miscanthus in a twin screw extruder (100 rpm and 100°C) and alkali (NaOH 12% and 70°C). It is a fact that higher alkali concentration not only removes the lignin but also degrades the carbohydrates. Hence, the low sugar recovery reported for miscanthus might be due to degradation of carbohydrates and the inherent characteristics of biomass. The retention of carbohydrates depends on the feedstock composition as evident from the ammonia pretreatment of corn stover and poplar (Gupta et al., 2007). Recently, Lee et al (2009) extruded Douglas fir using a twin screw extruder at 50 rpm and 40°C and reported cellulose to glucose conversion of 62.4% when ethylene glycol was added as a cellulose affinity additive. The difference in glucose recovery might be due to delignification, type of extruder, pretreatment conditions (as screw speed, temperature, and particle size), and the inherent characteristics of biomasses. Jung et al (1992) achieved 1.85, 1.73, and 1.58 times higher glucose, xylose, and arabinose recovery, respectively, when maize stalk was pretreated with 1M NaOH at 39°C for 24 h followed by 72 h *in vitro* degradability compared to control sample. These authors reported a delignification of 62% for the above pretreatment condition.

A comprehensive comparison of various pretreatment methods employed on corn stover is listed in Table 4. It could be observed from the table that dilute acid (Yan et al., 2009), maleic acid (Lu & Mosier, 2008), lactic and/ acetic acid (Xu et al., 2009), controlled pH hot water (Mosier et al., 2005), steam (Bura et al., 2009), and steam explosion (Elander et al., 2009) had comparable yield of this extrusion pretreatment. The present results were higher than dilute sulfuric acid (Chen et al., 2009; Zhu et al., 2009), formic acid (Xu et al., 2009a), soaking in ethanol and aqueous ammonia (Kim et al., 2009), and steam explosion (Mosier et al., 2005); however, it was lower than dilute acid (Zhu et al., 2005), inorganic salt-FeCl₃ (Liu et al., 2009), cellulose solvent and organic solvent based lignocelluloses fractionation (Zhu et al., 2009). It could be noted that the particle size of corn stover used in most of the pretreatment listed in the table was lower than the extrusion pretreatment, and the higher enzyme dose was employed. Moreover, extrusion has an added advantage as a continuous process, wherein additions of chemicals are easy as demonstrated by Dale et al (1999), de Vrije et al (2002), and Lee et al (2009).

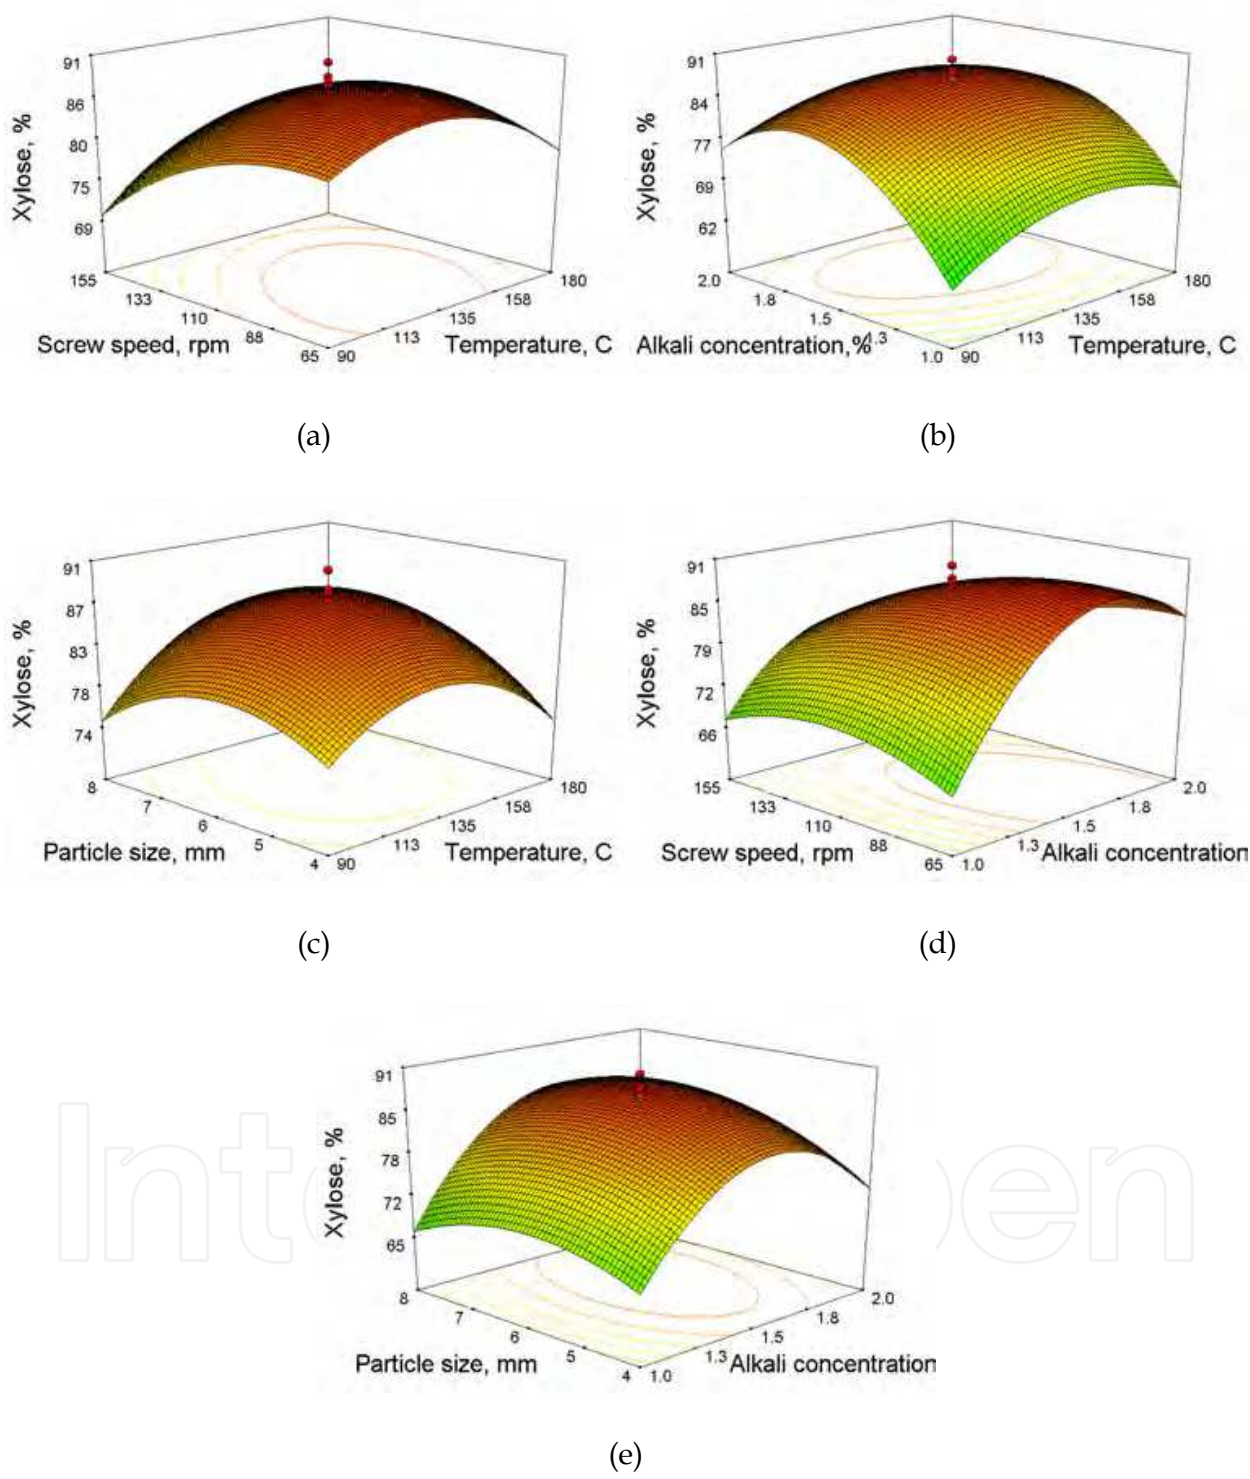


Fig. 2. Interaction effect of two independent variables on xylose recovery from corn stover (when other factors fixed at the center point: 135°C, 110, rpm, 1.5% w/w, and 6 mm)

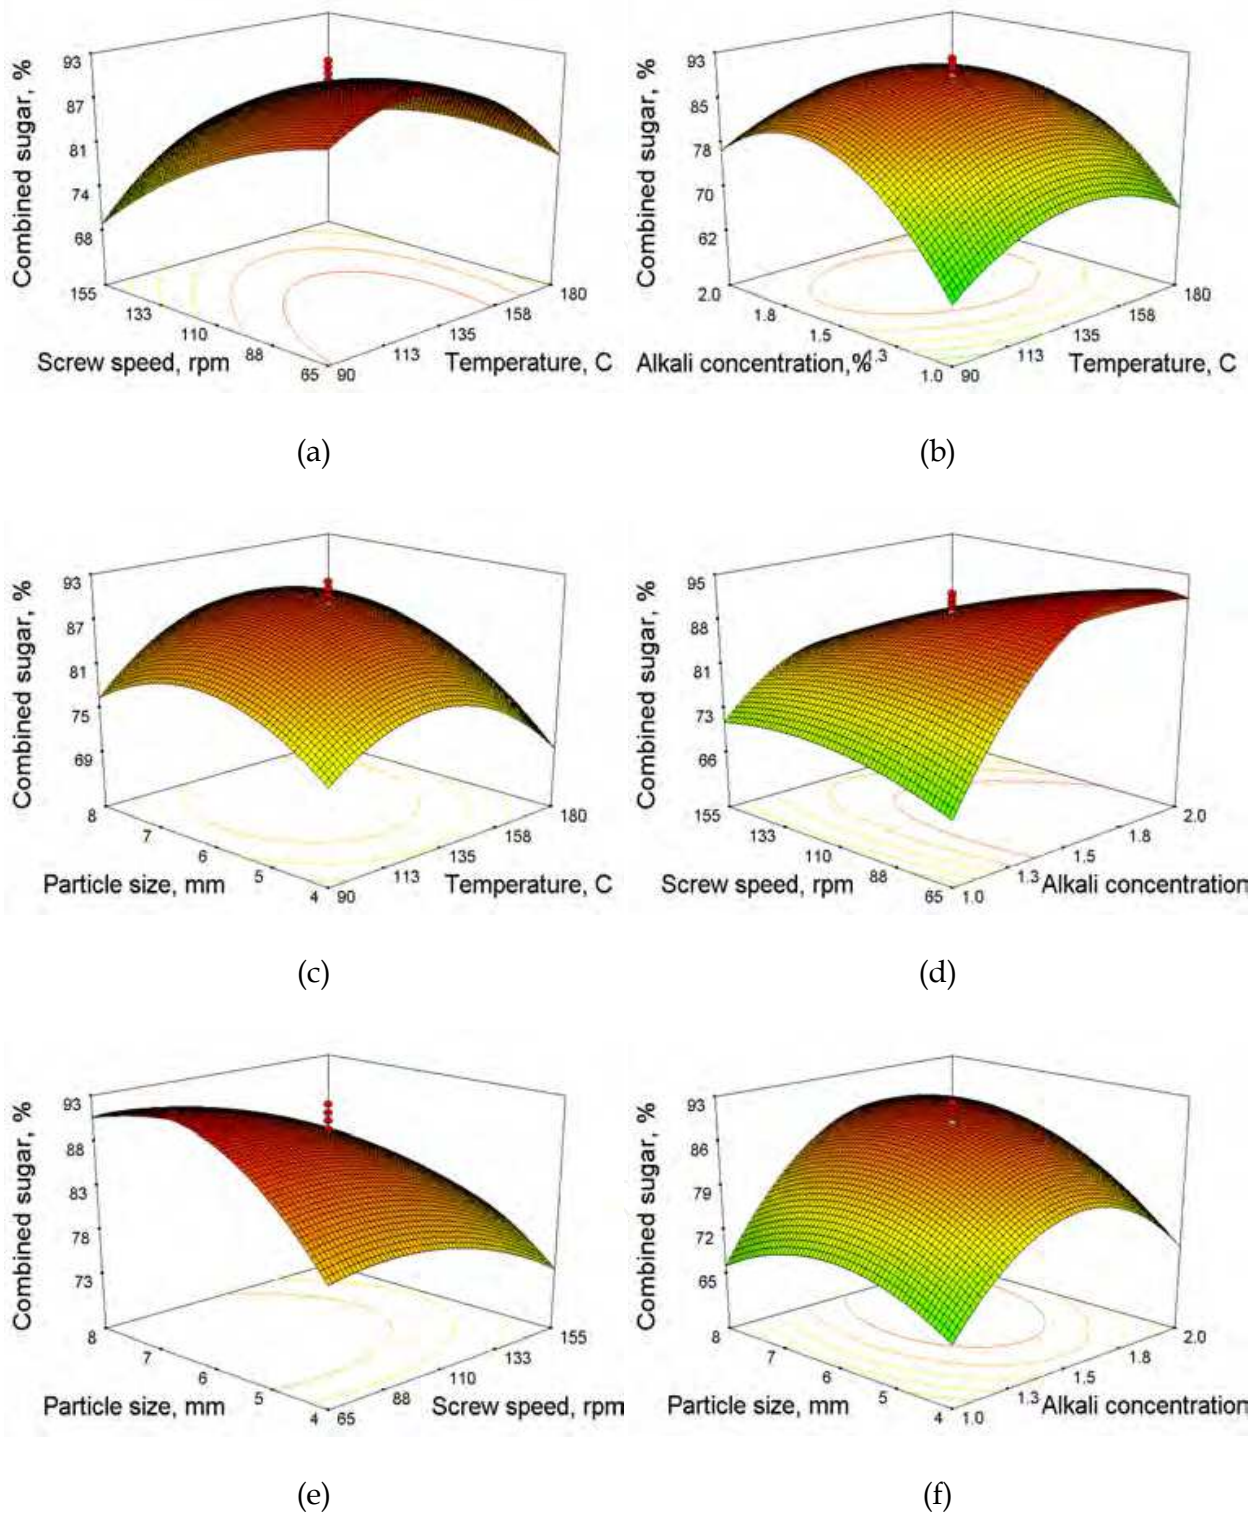


Fig. 3. Interaction effect of two independent variables on combined sugar recovery from corn stover (when other factors fixed at the center point: 135°C, 110, rpm, 1.5% w/w, and 6 mm)

Corn stover was subjected to several pretreatment methods such as dilute acid, alkali, wet oxidation, hot water, steam, steam explosion, ammonia recycle percolation, and AFEX as found in literature. Table 1 shows different alkalis employed on corn stover and their pretreatment conditions along with glucose and xylose recovery. Although large corn stover particles was used in the present study, the glucose and xylose recovery obtained in this study was comparable with most of the alkali pretreatments listed in the table. However, the result of present study was higher than the values reported for alkali (Varga et al., 2002), wet oxidation (Varga et al., 2003), aqueous ammonia soaking pretreatment (Kim & Lee, 2007), lime and alkali pretreatment (Chen et al., 2009). Rodgers et al (2009) achieved higher glucose and xylose yield than the current study.

The sugar recovery obtained in the present study was comparable with that of the 88-93% glucose reported for dilute acid pretreatment at 140°C with 0.98% H₂SO₄ for 40 min (Lloyd & Wyman, 2005), more than 95% glucose and 77% xylose from the dilute acid percolation process at 180°C with 1% acid (w/w) at a flow rate of 10 mL/min for 3 min, followed by N₂ through quenching (Zhu et al., 2004). Varga et al (2002) obtained 95.7% glucose when corn stover was pretreated with 1% NaOH for a day followed by a 60 min autoclaving with 1% H₂SO₄. A similar result was reported from compressed hot water pretreatment of corn stover at 200°C with a flow rate of 10 mL/min for 24 min (Liu & Wyman, 2005). The difference in sugar recovery might be due to the mechanisms of different pretreatment methods, the pretreatment conditions employed, and the composition of raw corn stover.

3.4 Response surface model evaluation

The predicted and observed responses along with coded and actual variables are presented in Table 2. The closeness of the predicted and observed responses reflects the goodness of fit. The analysis of variance of the observed data, p value ($\alpha = 0.05$) and the coefficient of determination (R^2) of the regression model using CCRD are presented in Table 5. The F value for the glucose, xylose, and combined sugar were very high compared to the tabular $F_{14, 21}$ value of 2.19 indicates that the model was highly significant. As noted from the table that the regression model was significant, whereas the lack of fit was not significant, suggested that proposed model is good. The fact that the coefficient of determination was also close to one reflects the adequacy of the model to represent relationship among the barrel temperature, screw speed, alkali concentration, and particle size on sugar recovery. However, a large value of R^2 does not always imply that the regression model is a good one because R^2 will increase when a variable is added regardless of whether the additional variable is statistically significant or not (Xin & Saka, 2008). Hence, adjusted and predicted R^2 were calculated to check the model adequacy.

The predicted determination coefficient was in reasonable agreement with the adjusted determination coefficient and it also confirms the fitness of the model. The proposed models explain more than 90% of the variations in sugar recoveries. Coefficient of variation (CV) is the ratio of standard error estimate to the mean values expressed as percentage and is another measure to evaluate the goodness of the model. As a general rule, the CV should not be greater than 10% (Cocharan & Cox, 1957; Linko et al., 1984; Vainionpaa & Malkki, 1987). Considering the general rule, a low value of CV (2.68-3.20%) shows that the experiments conducted are precise and reliable. "Adeq Precision" measures the signal-to-noise ratio. The larger the ratio, better the prediction/optimization; in general, a ratio greater than 4 is desirable. The ratio of 38.69-57.38 indicates an adequate signal thus, the model can be used to navigate the design space (Liu et al., 2010).

Pretreatment	Pretreatment conditions	Biomass size, mm	Hydrolysis conditions	Optimum conditions	Yield	Reference
Dilute acid	0.2-1% H ₂ SO ₄ , 160- mL/min, 4.4 min	0.84-2.0	5-15 FPU, 30 CBU/g glucan, 96 h	15 FPU and 30 CBU/g glucan	>98% enzymatic digestibility	Zhu et al., 2005
Dilute acid	acid), 1 min , 30% slr 1.5% H ₂ SO ₄	0.25-0.42	15 FPU, 30 CBU/g glucan; 5 FPU, 30 CBU/g glucan, 72 h		60 and 74% digestibility for 5 and 15 FPU/g glucan	Zhu et al., 2009
Dilute acid		<2	20 FPU, 10 CBU/g DM, 48 h, 8% slr		39% hydrolysis yield, 12.2% lignin removal	Chen et al., 2009
Dilute sulfuric acid cycle spray flow-through	1-3% w/v H ₂ SO ₄ , 8 L/min, 90 min, -120 min, 8 L/min, 2% w/v H ₂ SO ₄ -15 L/min, 90 min, 2% w/v H ₂ SO ₄ L/min, 90 min, 2% w/v H ₂ SO ₄ 0.05-0.2 M, 150-	< 0.42	60 FPU, 15 CBU/g glucan, 72 h, 1% glucan loading	8 L/min	90-95% glucose, 90-93% xylose, and 70-75% lignin removal	Yan et al., 2009
Maleic acid		0.42				
Formic acid	15 min, no formic acid;	2	30 FPU/g DM, 2% slr, 24 h; SSF 168 h	0.2 M, 100-	80-90% xylose yield	Lu & Mosier, 2008 Xu et al., 2009a
Lactic and/ acetic acid pretreatment	DM, 41.1 g lactic acid and 15.73 g acetic acid/kg DM, 40.21 g acetic acid/kg DM	2	30 FPU/g DM, 24 h, 2% slr		75.0 and 73.2, 66.4 and 50.8% glucose and xylose yield from without and with formic acid, 76.5 and 69.6% ethanol from with and without formic acid pretreatment	Xu et al., 2009b
Alkali (NaOH)	0-0.8% (0-0.058 g NaOH/g), soaking at room temperature, 2 h	< 2	46 FPU/g substrate, 65 h	0.8% NaOH	83.9-95.7% glucose, 58.9-81.1% xylose, no inhibitors	
FeCl ₃ pretreatment	0.1 M/L FeCl ₃ , 140-	0.18-0.84	15-60 FPU, 26-25-105 CBU/ g cellulose, 72 h		50-95 and 65-95% glucose and xylose depending on anatomical fractions	Duguid et al., 2009
Soaking in ethanol and aqueous ammonia	1-49 wt% ethanol , 1 solid:9 liquid (15 wt% NH ₃ 24 h	0.5-2.0	30 FPU, 30 CBU/g glucan, 96 h, 1% glucan loading	105 CBU/g cellulose 20% ethanol	98% hydrolysis yield	Liu et al., 2009
AFEX	1 stover:1 NH ₃ moisture db	< 0.125- >0.841	15 FPU, 64 pNPGU/g glucan, xylanase 10% of cellulose, 168 h, 1% glucan loading, washing		100 and 89.6% glucose and xylose retention, 70.1% lignin removal; 80% glucose and 60% xylose	Kim et al., 2009
Controlled pH	160- -30 min	6.4	15 FPU, 30 CBU/g glucan, 72 h, 1% slr	stover slurry	>98% enzymatic hydrolysis, size reduction , washing, and xylanase addition improved the yield	Chundawat et al., 2007
Steam pretreatment	3% SO ₂ , 170 C, 9 min.; 3% SO ₂ , 190 C, 5 min, (0% SO ₂ , 190 C, 5 min); 210 C, 7.8 min, 3% SO ₂	0.5-2.0	15 FPU, 30 IU/g cellulose, 72 h, 1% slr		86.9-87.2% total sugar	Elander et al., 2009; Mosier et al., 2005
Steam explosion	0-3% H ₂ SO ₄ ; 180-	2-3 cm	15 FPU and 20 IU/g DM; 48 h; 2% slr		58, 88, and 98% glucose; 63, 86, and 98% xylose	Bura et al., 2009
SO ₂ catalyzed	0.5-3% SO ₂ , 170- -10 min	NR	15 FPU, 30 CBU/g glucan, 72 h,		85% glucose yield	Zimbardi et al., 2007
					93.7% total sugar	Elander et al.,

slr- solids loading rate DM- dry matter

Table 4. Pretreatment and hydrolysis conditions employed on corn stover pretreated in different pretreatment methods

Response	Source	df	Sum of squares	Mean squares	F value	P value	R ² / Adj R ² /Pred.R ²	CV(%) / Adeq Precision
Glucose	Regression	14	13943.27	995.94	294.6	0.0001	< 0.99/ 2.68/ 57.38	
	Lack of fit	10	48.42	4.84	2.36	0.0875	0.99/ 0.97	
	Pure error	11	22.56	2.05				
	Residual	21	70.99	3.38				
	Total	35	14014.27					
Xylose	Regression	14	7984.55	570.32	114.38	0.0001	< 0.98/ 3.20/ 38.69	
	Lack of fit	10	68.05	6.80	2.04	0.1286	0.97/ 0.94	
	Pure error	11	36.65	3.33				
	Residual	21	104.70	4.98				
	Total	35	8089.26					
Combined	Regression	14	11393.72	813.83	210.33	0.0001	< 0.99/ 2.83/ 47.07	
	Lack of fit	10	55.81	5.58	2.41	0.0822	0.98/ 0.97	
	Pure error	11	25.43	2.31				
	Residual	21	81.25	3.86				
	Total	35	11474.98					

Table 5. Analysis of variance of the fitted model for different responses

3.5 Optimization and validation

The interactions discussed in the previous section were for individual sugar recovery. Maximum glucose, xylose, and combined sugar recovery were the desirable responses considered for optimization. Hence, an overlay contour plots superimposing glucose, xylose, and combined sugar recovery responses were depicted in Fig. 4. The shaded region gave wide range of options to select the barrel temperature (90-180°C), screw speed (50-155 rpm), alkali concentration (1.25-2.0%), and particle size (4-9 mm) for maximum glucose (80-95%), xylose (80-95%), and combined sugar (80-90%) recovery from corn stover. Based on the models, numerical optimization was carried out in Design Expert. Considering each response, three solutions were found as shown in Table 6. In order to confirm the predicted responses, corn stover was extruded at a barrel temperature of 133°C, a screw speed of 85 rpm and 1.65% alkali concentration with two different particle sizes since the optimum particle size was 6.45 mm, which is in between 6 and 8 mm. The extruded samples (Fig. 5) were subjected to the enzymatic hydrolysis and sugar measurement as described in the Materials and Methods.

The glucose, xylose, and combined sugar obtained were 91.8, 82.3, and 90.0%, respectively; the values were very close to the predicted values; which was 5.0, 2.5, and 4.3 times higher than control sample. The sugar recovery comparison of control, alkali soaked, and alkali soaked – extruded corn stover is shown in Fig. 6 for better understanding. The alkali soaked corn stover had a double times sugar recovery of control, whereas the alkali soaked-extrusion pretreated corn stover had double times that of alkali soaked corn stover as evident from Fig 6. A mass balance diagram is shown in Fig. 7 for better understanding

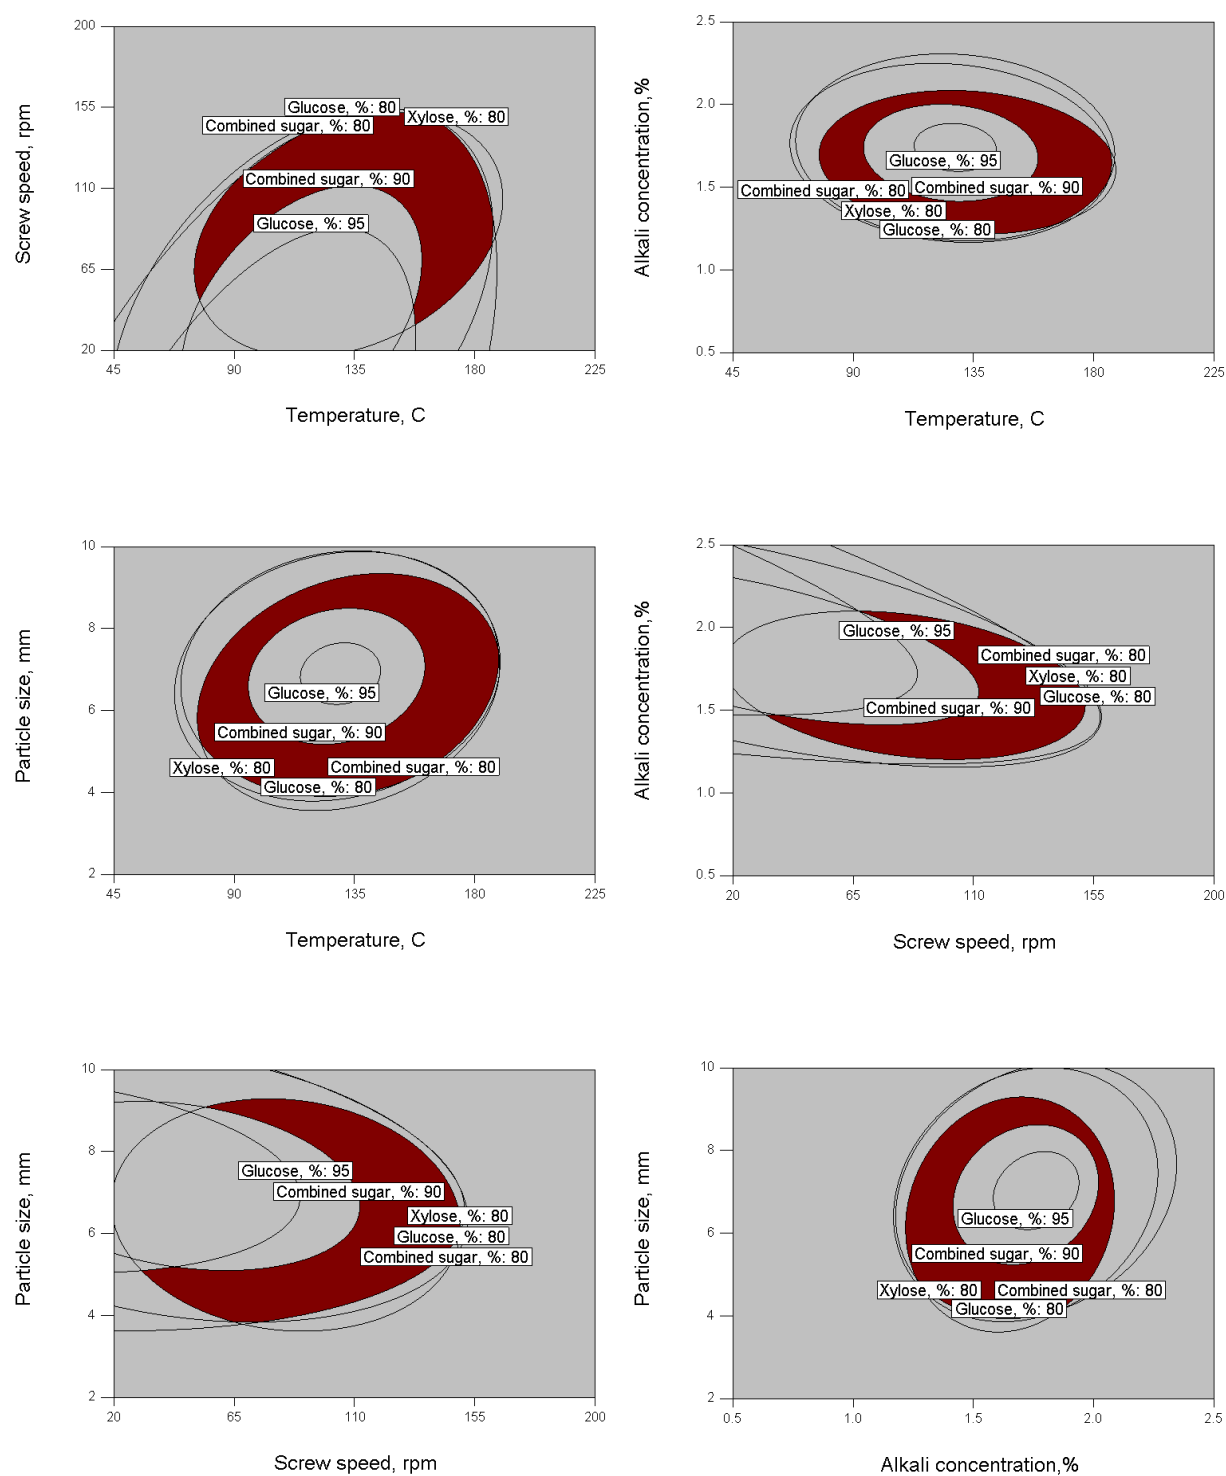


Fig. 4. Superimposed contours for sugar recovery responses as a function of temperature, screw speed, alkali concentration, and particle size of corn stover

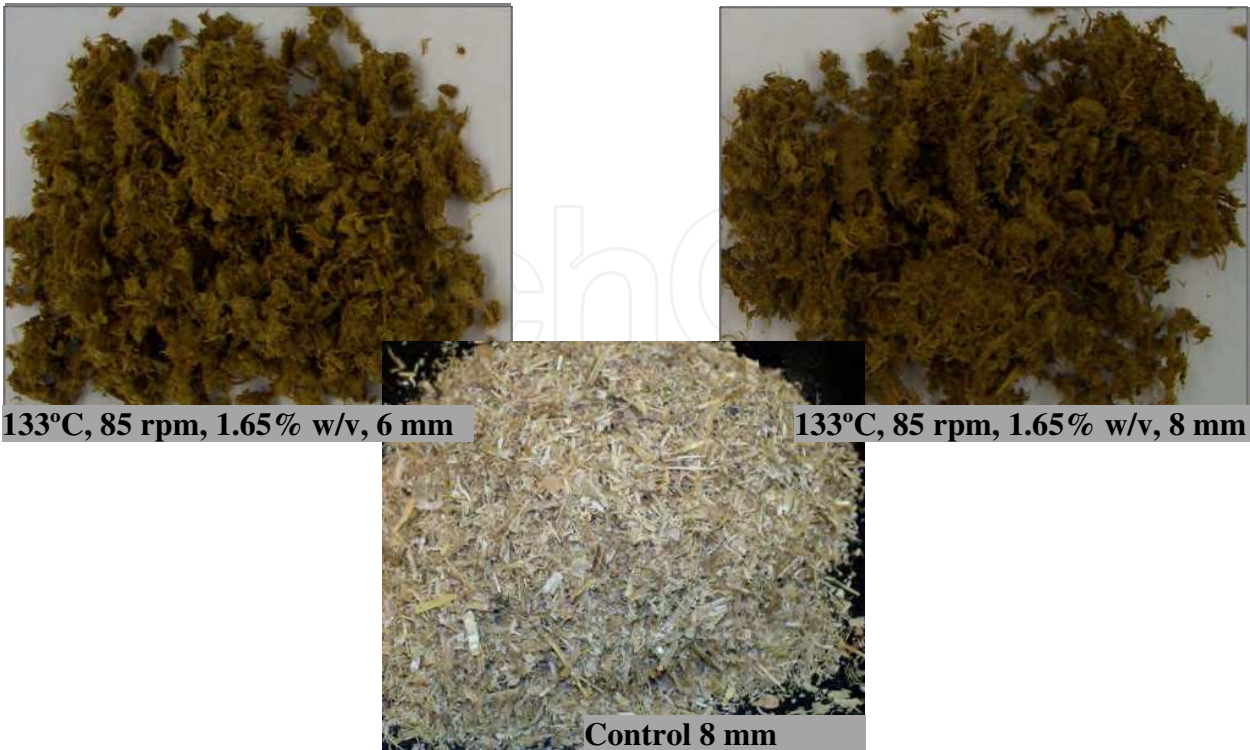


Fig. 5. Corn stover extruded at optimum pretreatment conditions for validation

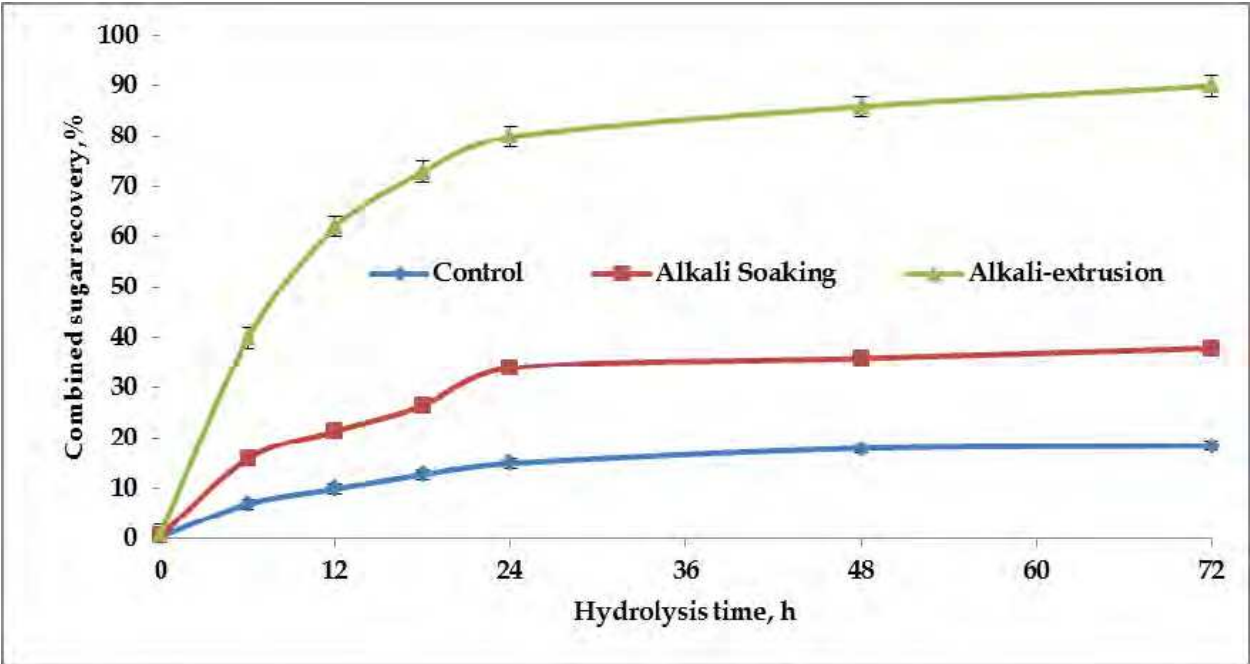


Fig. 6. Comparison of sugar recovery profile from control, alkali soaked, and alkali soaked-extruded corn stover

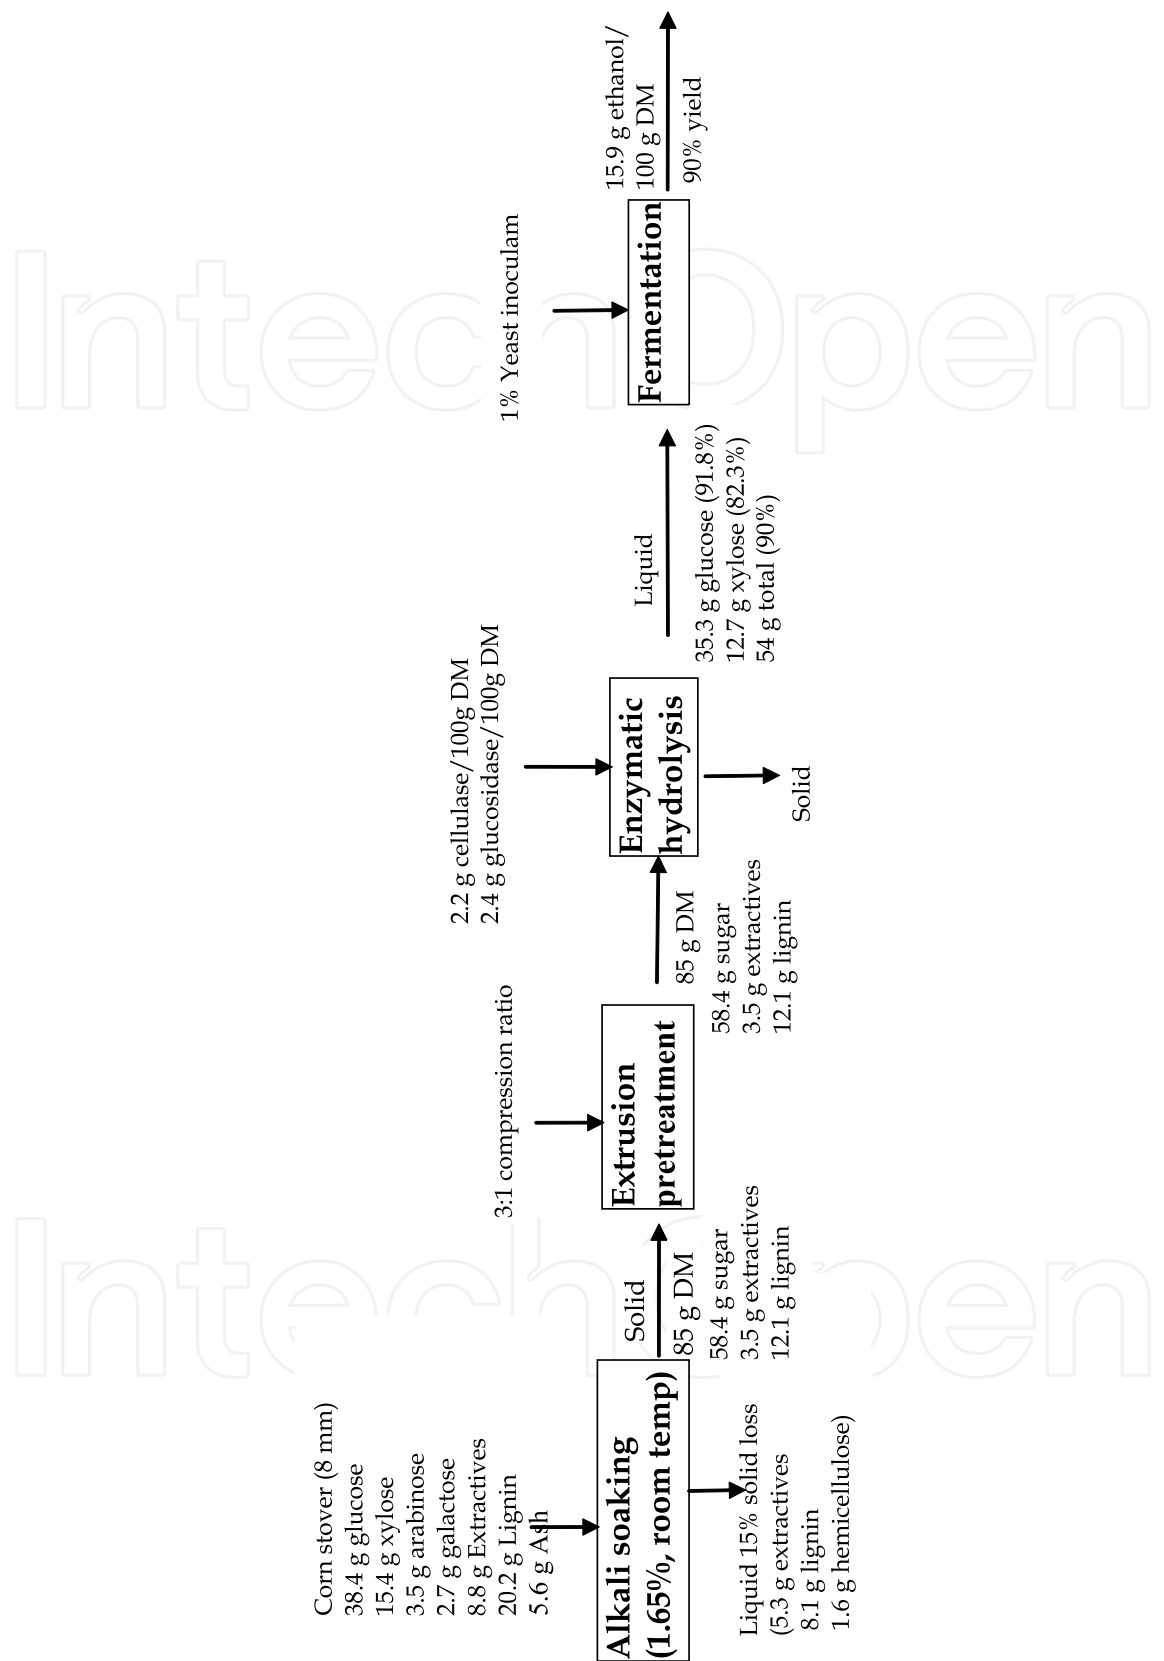


Fig. 7. Mass balance diagram of alkali soaking-extrusion pretreatment of prairie cord grass followed by fermentation

Solution #	Temperature, °C	Screw speed, rpm	Alkali conc, %	Particle size, mm	Glucose, %	Xylose, %	Combined sugar, %
1	133	84	1.65	6.45	95.61	88.73	93.89
2	133	85	1.65	6.46	95.52	88.73	93.84
3	133	84	1.65	6.44	95.68	88.73	93.94
Validation	133	85	1.65	6	92.65	86.59	90.53
	133	85	1.65	8	91.76	86.26	90.08

Table 6. Solutions for optimal and validation conditions

(assumption a thumb rule is 50% of the glucose will be converted into ethanol during fermentation with an efficiency of 90%).This optimization study revealed that a larger particle size (8 mm) could be used for biofuels production; thereby the biomass size reduction energy cost can be saved to a greater extent.

Although the optimum pretreatment condition differed from corn stover, similar sugar recovery was reported for switchgrass and prairie cord grass (Karunanithy & Muthukumarappan, 2011b, 2011c). The biomass digestibility depends on the specific types of phenolic acids that constitute the non-core lignin of lignocellulosic biomass (Jung & Deetz, 1993). These phenolic acids are involved in the ester linkages between hemicellulose and lignin. The major non-core lignin phenolic acids are *p*coumaric acid (CA) and ferulic acid (FA). According to Burritt et al (Burritt et al., 1984) and Jung (1989), the ratio of CA to FA present in non-core lignin has a strong negative impact on biomass digestibility. The difference in alkali concentration might be attributed to their *p*coumaric to ferulic acids ratio apart from lignin content. The glucose, xylose, and combined sugar recovery of 90.5, 81.5, and 88%, respectively, were reported for the optimum pretreatment conditions of 180°C barrel temperature, 118 rpm screw speed, 2% alkali concentration, and 6 mm switchgrass particle size. The optimum pretreatment conditions of 114°C barrel temperature, 122 rpm screw speed, 1.70% alkali concentration, and 8 mm particle size of prairie cord grass resulted in a glucose, xylose, and combined sugar recovery of 87, 85, and 82%, respectively. The difference in sugar recovery and optimum conditions might be attributed to the inherent nature of biomasses including their chemical compositions.

3.6 Byproducts formation

In general, furfural, HMF, and acetic acid are the fermentation inhibitors found in most of the pretreatment at different extent for various feedstocks as listed in Table 7. Pretreatment temperature, residence time, and acid concentration are the important factors influence the degradation process; moreover the degradation is proportional to the pretreatment severities (Bustos et al., 2003; Hodge et al., 2008; Rodríguez et al., 2009; Sassner et al., 2008; Yu et al., 2010; Zeng et al., 2007). When side chains of acetyl group present in hemicellulose are released, acetic acid is generated. Various researchers reported a range of 1.9-7.3% acetyl group for corn stover (Balan et al., 2009; Kim & Lee, 2005b; Torget et al., 1991; Weiss et al., 2009). Acetic acid was the only byproduct found in most of the pretreated corn stover samples in the range of 0.060-0.168 g/L. The highest acetic acid (0.168 g/L) resulted at a

Biomass	Pretreatment	Conditions	Acetic acid, g/L	HMF, g/L	Furfural, g/L	Reference
Corn stover	Dilute acid	0.5 1.4% H ₂ SO ₄ , 165-	NR	NR	6-31%#	Schell et al., 2008
Corn stover	Dilute acid	0.5 1.4% H ₂ SO ₄ , 165-	15.5 g	4	3.9	Hodge et al., 2008
Corn stover	Dilute acid	1.5% H ₂ SO ₄	0.35	NR	0.01	Chen et al., 2009
Corn stover	Dilute acid	1.5-1.6% H ₂ SO ₄ , 180-	NR	0.1-1%+	2-11%+	Lu & Mosier at al., 2007
Corn stover	Maleic acid		NR	NR	1.8	Lu & Mosier at al., 2007
Corn stover	Formic acid		1.18	0.28	1.3	Xu et al., 2009a
Corn stover	Lime		0.22	NR	NR	Chen et al., 2009
Corn stover	Alkali		0.19	NR	ND	Chen et al., 2009
Corn stover	Aqueous ammonia/acid	10% NH ₄	0.26	NR	ND	Chen et al., 2009
Corn stover	Hot water		NR	0.01	0.09-0.1	Zeng et al., 2007
Corn stover	Steam	2% SO ₂	2-4	< 2	<2	
Corn stover	Steam		NR	0.18	1.26	7
Corn stover	Steam explosion		1.4-4.5	NR	0.06-0.18	Lu et al., 2010
Rice straw	Compressed hot water	140-	0.25-3.25	0-0.7	0-3	Yu et al., 2010
Rice straw	Hydrothermal	150-				
Sugar cane bagasse	Dilute acid	-20 min, liquid/solid ratio 6-8	0.4-2.03	NR	NR	et al., 2009
Sugarcane bagasse		-20 min,0.05-0.045 mol/L H ₂ SO ₄ , 4-20% DM	3.29*	0.35*	4.52*	Neureitter et al., 2002
Sugarcane bagasse	Hydrochloric acid	2-6% HCl, 100-	NR	NR	8	Bustos et al., 2003
Sugarcane bagasse	Wet oxidation	185-				
Wheat straw		-15 min, 2g Na ₂ CO ₃ or 36.5%w/w H ₂ SO ₄ pH 3-10	0.7-3.0*	0-0.07 *	0-0.53*	Martin et al., 2007
Wheat straw	Dilute acid		NR	NR	2.5	Kabel et al., 2007
Wheat straw	Steam explosion	0.9% H ₂ SO ₄ soaking, 18 h, 45 C; 160-200 C, 5-20 min	NR	0.03-1.51*	0.03-0.24*	Ballesteros et al., 2006
Rye straw	Liquid hot water		5.1	0.1	1.4	
Barely straw	Steam	170-230 C, 4g/min, 10% slr	NR	0.2-4.4%	0-3.6%	Ingram et al., 2009
Oil palm fruit bunch	Dilute acid	0.2-2.0% H ₂ SO ₄ , 5 min, 190-6% H ₂ SO ₄		0.1-0.3*	0.6-1.8*	Linde et al., 2006
Eucalyptus			2-5	NR	1-4	Rahman et al., 2007
Aspen	Dilute acid	0.65% H ₂ SO ₄	3.10	0.20	1.23	Canettieri et al., 2007
Salix	Steam explosion		0.74-4.33*	0.009-0.2*	0.29-2.01*	De Bari et al., 2007
	Steam	0.25% or 0.5%H ₂ SO ₄ , 180- ²	NR	0.1-0.6	0.4-2.4	Sassner et al., 2008
		-12 min				

furfural yield *g/100 g + loss of respective sugar slr- solids loading rate NR- not reported ND- not detected DM- dry matter

Table 7. Comparison of inhibitor formation from different feedstocks produced through various pretreatments

barrel temperature of 135°C and a screw speed of 110 rpm, alkali concentration of 1.5% and a particle size of 6 mm. It was noticed that acetic acid concentration was 0.143 g/L for the optimized conditions (133°C, 85 rpm, 1.65%, and 8 mm). The acetic acid formation and its concentration confirmed that the deacetylization process, however the concentration was below the inhibition limit (Taherzadeh et al., 1997). The particle size of rice straw and silvergrass inversely influenced the acetic acid formation in dilute acid pretreatment (Guo et al., 2008); however, it was not confirmed in this study.

The acetic acid concentration was lower than dilute acid (Chen et al., 2009; Hodge et al., 2008), formic acid (Xu et al., 2009a), lime (Chen et al., 2009), alkali (Chen et al., 2009), hydrothermal pretreatment (Öhgren et al., 2006; Lu et al., 2010) of corn stover; compared to other feedstocks listed in the table. NaOH has higher reactivity with hemicellulose than cellulose due to amorphous characteristics of hemicellulose (Lai, 2001). In addition, Gupta (2008) reported that minimum loss of hemicellulose is unavoidable for corn stover pretreated with dilute NaOH (1-5%) at 60°C for 24 h. However, the mild pretreatment condition (25°C, 1% NaOH, 24 h) minimized the sugar loss from corn stover (Gupta, 2008). No glycerol was found in any of the pretreatment combinations in contrary to the results reported by Karunanithy and Muthukumarappan (Karunanithy & Muthukumarappan, 2010c, 2011a, 2011b, 2011c, 2010a, 2010b). In addition, no furfural and HMF were found in any of the pretreated corn stover samples. The possible reason could be short residence time and no acidic conditions during pretreatment as compared most of the pretreatment methods listed in the table.

4. Conclusions

Corn stover was extruded using a single screw extruder at various conditions based on a central composite rotatable design to obtain maximum glucose, xylose, arabinose, and combined sugar recovery. Statistical analyses confirmed that extruder barrel temperature, screw speed, alkali concentration, and particle size had a significant effect on sugar recovery. Response surface methodology was adopted to optimize alkali concentration, corn stover particle size, and extruder parameters for maximum sugar recovery. The proposed quadratic model to predict the sugar recovery had high F and R² values with low p value represents an adequate relationship among the independent variables studied on sugar recovery from corn stover. It was found that under optimum condition such as barrel temperature of 133°C, screw speed of 85 rpm, alkali concentration of 1.65% w/v with 8 mm particle size, the glucose, xylose, and combined sugar recovery were 91.8, 82.3, and 90.1%, respectively, and also confirmed through validation. This optimization study revealed that larger corn stover particle (8 mm) can be used for biofuels production, which could result in saving of size reduction energy cost.

5. Acknowledgements

This research was supported by funding from the Agricultural Experiment Station and North Central Sun Grant Center at South Dakota State University through a grant provided by the US Department of Transportation, Office of the Secretary, Grant No.DTOS59-07-G-00054. Also, enzymes supplied by Novozymes, Inc for conducting this study were greatly appreciated.

6. References

- Altan, A., McCarthy, KL., & Maskan, M. (2008). Twin-screw extrusion of barley-grape pomace blends: Extrudate characteristics and determination of optimum processing conditions. *J Food Eng.*, 89, 24-32, 0260-8774
- Balan, V., da Costa Sousa, L., Chundawat, SPS., Marshall, D., Sharma, LN., Chambliss, CK., & Dale, BE. (2009). Enzymatic digestibility and pretreatment degradation products of AFEX-treated hardwoods (*Populus nigra*). *Biotechnol. Prog.*, 25, 2, 365-375, 1520-6033
- Ballesteros, I., Negro, MJ., Oliva, JM., Cabañas, A., Manzanares, P., & Ballesteros, M. (2006). Ethanol production from steam-explosion pretreated wheat straw. *Appl. Biochem. Biotechnol.*, 130, 1-3, 496-508, 0273-2289
- Bura, R., Chandra, R., & Saddler, J. (2009). Influence of xylan on the enzymatic hydrolysis of steam-pretreated corn stover and hybrid poplar. *Biotechnol. Prog.* 25, 2, 315-322, 1520-6033
- Burritt, EA., Bittner, AS., Street, JC., & Anderson, MJ. (1984). Correlations of phenolic-acids and xylose content of cell-wall with in vitro dry-matter digestibility of 3 maturing grasses. *J Dairy Sci.*, 67, 6, 1209-1213, 0022-0302
- Bustos, G., Ramírez, JA., Garrote, G., & Vázquez, M. (2003). Modeling of the hydrolysis of sugar cane bagasse with hydrochloric acid. *Appl. Biochem. Biotechnol.*, 104, 52-69, 0273-2289
- Cadoche, L., & Lopez, GD. (1989). Assessment of size reduction as a preliminary step in the production of ethanol from lignocellulosic wastes. *Biolog. Wastes*, 30, 153-157, 0269-7483
- Canettieri, EV., Rocha, GJM., Carvalho Jr, JA., & Silva, JBA. (2007). Optimization of acid hydrolysis from the hemicellulosic fraction of Eucalyptus grandis residue using response surface methodology. *Bioresour. Technol.*, 98, 422-428, 0960-8524
- Chang, VS., Nagwani, M., Kim, C-H., & Holtzapple, MT. (2001). Oxidative lime pretreatment of high-lignin biomass poplar wood and newspaper. *Appl. Biochem. Biotechnol.*, 94, 1-28, 0273-2289
- Chen, FL., Wei, YM., Zhang, B., & Ojokoh, AO. (2010). System parameters and product properties response of soybean protein extruded at wide moisture range. *J Food Eng.*, 96, 208-213, 0260-8774
- Chen, M., Zhao, J., & Xia, L. (2009). Comparison of four different chemical pretreatments of corn stover for enhancing enzymatic digestibility. *Biomass Bioenerg.*, 33, 10, 1381-1385, 0961-9534
- Chundawat, SPS., Venkatesh, B., & Dale, BE. (2007). Effect of particle size based separation of milled corn stover on AFEX pretreatment and enzymatic digestibility. *Biotechnol. Bioeng.*, 96, 2, 219-231, 1097-0290
- Cocharan, WG., & Cox, GM. (1957). In *Experimental Designs*, Bradley RA, Kendall DG, Hunter JS, Watson GS (eds). Wiley: New York, pp. 335-375
- Crofcheck, CL., & Montross, MD. (2004). Effect of stover fraction on glucose production using enzymatic hydrolysis. *Transactions of the ASAE*, 47, 3, 841-844, 0001-2351
- Dale, BE., Weaver, J., & Byers, FM. (1999). Extrusion processing for ammonia fiber explosion (AFEX). *Appl. Biochem. Biotechnol.*, 77, 35-45, 0273-2289
- Dawson, L., & Boopathy, R. (2007). Use of post-harvest sugarcane residue for ethanol production. *Bioresour. Technol.*, 98, 9, 1695-1699, 0960-8524

- De Bari, I., Nanna, F., & Braccio, G. (2007). SO₂-catalyzed steam fractionation of aspen chips for bioethanol production: Optimization of the catalyst impregnation. *Ind. Eng. Chem. Res.*, 46, 23, 7711-7720, 0088- 5885
- de Leon, N., & Coors, JG. (2008). Chapter 7: Genetic improvement of corn for lignocellulosic feedstock production, In: *Genetic Improvement of Bioenergy Crops*, W. Vermerris (ed.), pp.185-210. Springer Science, 978-0-387-70804-1, New York
- Desari, RK., & Bersin, RE. (2007). The effect of particle size on hydrolysis reaction rates and rheological properties in cellulosic slurries. *Appl. Biochem. Biotechnol.*, 136-140, 289-299, 0273-2289
- Design Expert 7.1.6. Statease, Minneapolis, MN, 2002.
- de Vrije, T., de Haas, GG., Tan, GB., Keijsers, ERP., & Claassen, PAM. (2002). Pretreatment of miscanthus for hydrogen production by *thermotoga elfii*. *Inter. J Hydrogen Energy*, 27, 1381-1390, 0360-3199
- Duguid, KB., Montross, MD., Radtke, CW., Crofcheck, CL., Wendt, LM., & Shearer SA. (2009). Effect of anatomical fractionation on the enzymatic hydrolysis of acid and alkaline pretreated corn stover. *Bioresour. Technol.*, 100, 21, 5189-5195, 0960-8524
- Elander, RT., Dale, BE., Holtzapple, M., Ladisch, MR., Lee, YY., Mitchinson, C., Saddler, JN., & Wyman, CE. (2009). Summary of findings from the Biomass Refining Consortium for Applied Fundamentals and Innovation (CAFI): Corn stover pretreatment. *Cellulose*, 16, 4, 649-659, 1572-882X
- Elshafei, AM., Vega ,JL., Klasson, KT., Clausen, E., & Gaddy, JL.(1991). The saccharification of corn stover by cellulase from *Penicillinfuniculosum*. *Bioresour. Technol.*, 35, 73-80, 0960-8524
- Gibbons, WR., Westby, CA., & Dobbs, TL. (1986). Intermediate-scale, semicontinuous solid-phase fermentation process for production of fuel ethanol from sweet sorghum. *Appl. Environ. Microbiol.*, 51,1, 115-122, 0099-2240
- Guo, G-L., Chen, W-H., Chen, W-H., Men, L-C., & Hwang, W-S. (2008). Characterization of dilute acid pretreatment of silvergrass for ethanol production. *Bioresour. Technol.*, 99, 14, 6046-6053, 0960-8524
- Gupta, R. (2008). Alkaline pretreatment of biomass for ethanol production and understanding the factors influencing the cellulose hydrolysis. Ph.D Dissertation, Auburn University, Alabama
- Gupta, R., Kim, TH., & Lee, YY. (2007). Substrate dependency and effect of xylanase supplementation on enzymatic hydrolysis of ammonia-treated biomass. *Appl. Biochem. Biotechnol.*, 148,1-3, 59-70, 0273-2289
- Hayashi, N., Hayakawa, I., & Fujio, Y. (1992). Hydration of heat-treated soy protein isolate and its effect on the molten flow properties at an elevated temperature. *Inter. J Food Sci. Technol.*, 27, 565-571, 1365-2621
- Hodge, DB., Karim, MN., Schell, DJ., & McMillan, JD. (2008). Soluble and insoluble solids contributions to high-solids enzymatic hydrolysis of lignocelluloses. *Bioresour. Technol.*, 99, 18, 8940-8948, 0960-8524
- Hu, Z., Wang, Y., & Wen, Z.(2008). Alkali (NaOH) pretreatment of switchgrass by radio frequency-based dielectric heating. *Appl. Biochem. Biotechnol.* 148, 71-81, 0273-2289
- Ingram, T., Rogalinski, T., Bockemühl, V., Antranikian, G., & Brunner, G. (2009). Semi-continuous liquid hot water pretreatment of rye straw. *J Supercritical Fluids*, 48, 3, 238-246, 0896-8446

- Jorge, M., Roberto, G., Karina, PJX., Oliva, CE., Benjamin, R., & Cuauhtémoc, R. (2006). The optimization of the extrusion process when using maize flour with a modified amino acid profile for making tortillas. *Inter. J Food Sci. Technol.* 41, 727-736, 1365-2621
- Jung, HG. (1989). Forage lignins and their effects on fiber digestibility. *Agron. J.*, 81, 1, 33-38, 0002-1962
- Jung, HG., & Deetz, DA. (1993). Cell wall lignification and degradability. p. 315-346. In H.G. Jung et al (ed.) Forage cell wall structure and digestibility. ASA, CSSA, and SSSA, Madison, WI, 0891181156
- Jung, HG., Valdez, FR., Hatfield, RD., & Blanchette, RA. (1992). Cell wall composition and degradability of forage stems following chemical and biological delignification. *J Sci. Food Agric.*, 58, 347-355, 1097-0010
- Kaar, W., & Holtzapple, M. (2000). Using lime pretreatment to facilitate the enzymatic hydrolysis of corn stover. *Biomass Bioenerg.*, 18, 3, 189-199, 0961-9534
- Kabel, MA., Bos, G., Zeevalking, J., Voragen, AGJ., & Schols, HA. (2007). Effect of pretreatment severity on xylan solubility and enzymatic breakdown of the remaining cellulose from wheat straw. *Bioresour. Technol.*, 98, 10, 2034-2042, 0960-8524
- Kadam, KL, & McMillan, JD. (2003). Availability of corn stover as a sustainable feedstock for bio-ethanol production. *Bioresour. Technol.*, 88, 17-25, 0960-8524
- Karunanithy, C., Muthukumarappan, K., & Julson, JL. (2008). Influence of high shear bioreactor parameters on carbohydrate release from different biomasses. ASABE Paper No. 084109. St. Joseph, Mich.: ASABE
- Karunanithy, C., & Muthukumarappan, K. (2010a). Effect of extruder parameters and moisture content of corn stover and big bluestem on sugar recovery from enzymatic hydrolysis. *Biolog Engg.*, 2, 2, 91-113, 1934-2799
- Karunanithy, C., & Muthukumarappan, K. (2010b). Influence of extruder temperature and screw speed on pretreatment of corn stover while varying enzymes and their ratios. *Appl. Biochem. Biotechnol.*, 162, 264-279, 0273-2289
- Karunanithy, C., & Muthukumarappan, K. 2010c. Effect of extruder parameters and moisture content of switchgrass, prairie cord grass on sugar recovery from enzymatic hydrolysis. *Appl. Biochem. Biotechnol.* 162, 1785-1803, 0273-2289
- Karunanithy, C., & Muthukumarappan, K. (2011a). Optimization of corn stover and extruder parameters for enzymatic hydrolysis using response surface methodology. *Biological Engg.* 3(2), 73-95, 1934-2799
- Karunanithy, C., & Muthukumarappan, K. (2011b). Optimization of alkali concentration, switchgrass particle size and extruder parameters for maximum sugar recovery using response surface methodology. *Chemical Engg & Tech.*, (Accepted), 1521-4125
- Karunanithy, C., & Muthukumarappan, K. (2011c). Optimization of alkali concentration and extruder parameters for maximum sugar recovery from prairie cord grass using response surface methodology. *Biochemical Engg J.*, DOI:10.1016/j.bej.2011.02.001, 1369-703X
- Keshwani, DR. (2009). Microwave pretreatment of switchgrass for bioethanol production. PhD dissertation, North Carolina State University, Raleigh, North Carolina
- Kim, JW., & Mazza, G. (2008). Optimization of phosphoric acid catalyzed fractionation and enzymatic digestibility of flax shives. *Ind. Crops Prod.*, 28, 346-355, 0926-6690

- Kim, S., & Holtzapple, MT. (2005). Lime pretreatment and enzymatic hydrolysis of corn stover. *Bioresour. Technol.*, 96,18, 1994-2006, 0960-8524
- Kim, SB., & Lee, YY. (2002). Diffusion of sulfuric acid within lignocellulosic biomass particles and its impact on dilute acid treatment. *Bioresour. Technol.*, 83, 165-171, 0960-8524
- Kim, TH., & Lee, YY. (2005a). Pretreatment and fractionation of corn stover by ammonia recycle percolation process. *Bioresour. Technol.*, 96,18, 2007-2013, 0960-8524
- Kim, TH., & Lee, YY. (2005b). Pretreatment of corn stover by soaking in aqueous ammonia. *Appl. Biochem. Biotechnol.*, 121-124, 1119-1131, 0273-2289
- Kim, TH., & Lee, YY. (2006). Fractionation of corn stover by hot-water and aqueous ammonia treatment. *Bioresour. Technol.*, 97, 2, 224-232, 0960-8524
- Kim, TH., & Lee, YY. (2007). Pretreatment of corn stover by soaking in aqueous ammonia at moderate temperatures. *Appl. Biochem. Biotechnol.*, 136-140, 81-92, 0273-2289
- Kim, TH., Kim, JS., Sunwoo, C., & Lee, YY. (2003). Pretreatment of corn stover by aqueous ammonia. *Bioresour. Technol.* 90,39-47, 0960-8524
- Kim, TH., Lee, YY., Sunwoo, C., & Kim JS. (2006). Pretreatment of corn stover by low liquid ammonia percolation process. *Appl. Biochem. Biotechnol.*, 133, 41-57, 0273-2289
- Kim, TH., Nghiem, NP., & Hicks, KB. (2009). Pretreatment and fractionation of corn stover by soaking in ethanol and aqueous ammonia. *Appl. Biochem. Biotechnol.*, 153, 1-3, 171-179, 0273-2289
- Lai, YZ. (2001). Chemical degradation. Chapter 10 In: Wood and cellulosic chemistry (David N.-S. Hon and Nobuo Shiraishi), Marcel Dekker Inc., New York- Basel, pp .443-512, 08247-00244
- Lee, SH., Teramoto, Y., & Endo, T. (2009). Enzymatic saccharification of woody biomass micro/nanofibrillated by continuous extrusion process I - Effect of additives with cellulose affinity. *Bioresour. Technol.*, 100, 1, 275-279, 0960-8524
- Linde, M., Galbe, M., & Zacchi, G. (2006). Steam pretreatment of acid-sprayed and acid-soaked barley straw for production of ethanol. *Appl. Biochem. Biotechnol.*, 130, 1-3, 546-562, 0273-2289
- Linko, P., Mattson, C., Linko, YY., & Antila, J. (1984). Production of fat bread by continuous extrusion cooking from high α -amylase. *J Cereal Sci.*, 2, 43-51, 0733-5210
- Little, AD. (2001). Aggressive growth in the use of bioderived energy and products in the United States by 2010. Final Report. www.adltechnology.com
- Liu, C., & Wyman, C. (2005). Partial flow of compressed-hot water through corn stover to enhance hemicellulose sugar recovery and enzymatic digestibility of cellulose. *Bioresour. Technol.*, 96,1978-1985, 0960-8524
- Liu, L., Sun, J., Li, M., Wang, S., Pei, H., & Zhang, J. (2009). Enhanced enzymatic hydrolysis and structural features of corn stover by FeCl_3 pretreatment. *Bioresour. Technol.*, 100, 23, 5853-5858, 0960-8524
- Liu, Q., Cheng, K., Zhang, J., Li, J., & Wang, G. (2010). Statistical optimization of recycled-paper enzymatic hydrolysis for simultaneous saccharification and fermentation via central composite design. *Appl. Biochem. Biotechnol.* 160, 604-612, 0273-2289
- Lloyd, TA., & Wyman, CE. (2005). Combined sugar yields for dilute sulfuric acid pretreatment of corn stover followed by enzymatic hydrolysis of the remaining solids. *Bioresour. Technol.*, 96, 1967-1977, 0960-8524


- Lu, XB., Zhang, YM., Yang, J., & Liang, Y. (2007). Enzymatic hydrolysis of corn stover after pretreatment with dilute sulfuric acid. *Chem. Eng. Technol.* 30, 7, 938-944, 0930-7516
- Lu, Y., & Mosier, N. (2008). Kinetic modeling analysis of maleic acid catalyzed hemicellulose hydrolysis in corn stover. *Biotechnol. Bioeng.*, 101, 6, 1170-1181, 1097-0290
- Lu, Y., Wang, Y., Xu, G., Chu, J., Zhuang, Y., & Zhang, S. (2010). Influence of high solid concentration on enzymatic hydrolysis and fermentation of steam-exploded corn stover biomass. *Appl. Biochem. Biotechnol.*, 160, 360-369, 0273-2289
- Lu, YL., & Mosier, NS. (2007). Biomimetic catalysis for hemicellulose hydrolysis in corn stover. *Biotechnol. Prog.*, 23, 1, 116-123, 1520-6033
- Lynd, LR., van Zyl, WH., McBride, JE., & Laser, M. (2005). Consolidated bioprocessing of cellulosic biomass: an update. *Current Opin. Biotechnol.*, 16, 577-583, 0958-1669
- MacDonald, DG., Bakhshi, NN., Mathews, JF., Roychowdhury, A., Bajpai, P., & Moo-Young, M. (1983). Alkali treatment of corn stover to improve sugar production by enzymatic hydrolysis. *Biotechnol. Bioeng.*, 25, 2067-2076
- Mani, S., Tabil, LG., & Sokhansanj, S. (2004). Grinding performance and physical properties of wheat and barley straw, corn stover, and switchgrass. *Biomass Bioenerg.* 27, 339-352, 0961-9534
- Martin, C., Klink, HB., & Thomsen, AB. (2007). Wet oxidation as a pretreatment method for enhancing the enzymatic convertibility of sugarcane bagasse. *Enz. Micro. Technol.*, 40, 3, 426-432, 0141- 0229
- Miller, S., & Hester, R. (2007). Concentrated acid conversion of pine softwood to sugars Part I: Use of a twin-screw reactor for hydrolysis pretreatment. *Chem. Eng. Comm.*, 194, 1, 185-102, 1563-5201
- Mosier, N., Hendrickson, R., Ho, N., Sedlak, M., & Ladisch, MR. (2005). Optimization of pH controlled liquid hot water pretreatment of corn stover. *Bioresour. Technol.*, 96, 18,1986-1993, 0960-8524
- Muthukumarappan, K., & Julson, JL. (2007). Pretreatment of biomass using a novel extrusion process. 15th European Biomass Conference & Exhibition from Research to Market Development, pp583-586. Florence, Italy: ETA srl 7-11 May 2007
- National Research Council. (2000). Biobased industrial products- priorities of research and commercialization. National academy press, Washington, DC
- Neureiter, M., Danner, H., Thomasser, C., Saidi, B., & Braun, R. (2002). Dilute acid hydrolysis of sugarcane bagasse at varying conditions. *Appl. Biochem. Biotechnol.*, 98-100, 49-58, 0273-2289
- Öhgren, K., Rudolf, A., Galbe, M., & Zacchi, G. (2006). Fuel ethanol production from steam-pretreated corn stover using SSF at higher dry matter content. *Biomass Bioenerg.*, 30, 10, 863-869, 0961-9534
- Öhgren, K., Bura, R., Saddler, J., & Zacchi, G. (2007). Effect of hemicellulose and lignin removal on enzymatic hydrolysis of steam pretreated corn stover. *Bioresour. Technol.*, 98, 13, 2503-2510, 0960-8524
- Pedersen, M., & Meyer, AS. (2009). Influence of substrate particle size and wet oxidation on physical surface structures and enzymatic hydrolysis of wheat straw. *Biotechnol. Prog.* 25, 2, 399-408, 1520-6033
- Perlack, RD., Wright, LL., Turhollow, AF., Graham, RL., Stokes, BJ., & Erbach, DC. (2005). Biomass as feedstock for a bioenergy and bioproduct industry: The technical feasibility of a billion-ton annual supply, U.S. DOE and USDA, April 2005

- Rahman, SHA., Choudhury, JP., Ahmad, AL., & Kamaruddin, AH. (2007). Optimization studies on acid hydrolysis of oil palm empty fruit bunch fiber for production of xylose. *Bioresour. Technol.*, 98, 3, 554-559, 0960-8524
- Rodgers, M., Hu, Z., & Zhan, X. (2009). Enhancing enzymatic hydrolysis of maize stover by bayer process sand pretreatment. *Energy & Fuels*, 23, 4, 2284-2289, 1520-5029
- Rodríguez, A., Moral, A., Sánchez, R., Requejo, A., & Jiménez, L. (2009). Influence of variables in the hydrothermal treatment of rice straw on the composition of the resulting fractions. *Bioresour. Technol.*, 100, 20, 4863-4866, 0960-8524
- Saha, B., & Bothast, R. (1997). Enzymes in lignocellulosic biomass conversion. In: *Fuels and Chemicals from Biomass. ACS Symposium Series*, 666, 46-56, 0097-6156
- Sassner, P., Martensson, C-G., Galbe, M., & Zacchi, G. (2008). Steam pretreatment of H₂SO₄-impregnated Salix for the production of bioethanol. *Bioresour. Technol.*, 99, 1, 137-145, 0960-8524
- Schell, DJ., Farmer, J., Newman, M., & Mcmillan, JD. (2003). Dilute-sulfuric acid pretreatment of corn stover in pilot-scale reactor investigation of yields, kinetics, and enzymatic digestibilities of solids. *Appl. Biochem. Biotechnol.*, 105-108, 69-85, 0273-2289
- Selig, M., Weiss, N., Ji, Y. (2008). Enzymatic saccharification of lignocellulosic biomass. NREL/TP-510-42629. National Renewable Energy Laboratory, Golden, CO
- Service, RF. (2007). Cellulosic ethanol: Biofuel researchers prepare to reap a new harvest. *Sci.* 315, 1488-1491.
- Sluiter, A., Hames, B., Ruiz, R., Scarlata, C., Sluiter, J., Templeton, D., & Crocker, D. (2008a). Determination of structural carbohydrates and lignin in biomass. NREL/TP-510-42618. National Renewable Energy Laboratory, Golden, CO
- Sluiter, A., Hames, B., Ruiz, R., Scarlata, C., Sluiter, J., & Templeton, D. (2008b). Determination of ash in biomass. NREL/TP-510-42622. National Renewable Energy Laboratory, Golden, CO
- Sluiter, A., Hames, B., Hyman, D., Payne, C., Ruiz, R., Scarlata, C., Sluiter, J., Templeton, D., & Wolfe, J. (2008c). Determination of total solids in biomass and total dissolved solids in liquid process samples. NREL/TP-510-42621. National Renewable Energy Laboratory, Golden, CO
- Sluiter, A., Hames, B., Ruiz, R., Scarlata, C., Sluiter, J., & Templeton, D. (2008d). Determination of sugars, byproducts, and degradation products in liquid fraction process samples. NREL/TP-510-42623. National Renewable Energy Laboratory, Golden, CO
- Taherzadeh, MJ., Niklasson, C., & Lidén G. (1997). Acetic acid - Friend or foe in anaerobic batch conversion of glucose to ethanol by *Saccharomyces cerevisiae*? *Chem. Eng. Sci.*, 52, 15, 2653-2659, 0009-2509
- Teramoto, Y., Lee, SH., & Endo, T. (2009). Cost reduction and feedstock diversity for sulfuric acid-free ethanol cooking of lignocellulosic biomass as a pretreatment to enzymatic saccharification. *Bioresour. Technol.*, 100, 20, 4783-4789,
- Teymouri, F., Laureano-Perez, L., Alizadeh, H., & Dale, BE. (2005). Optimization of the ammonia fiber explosion (AFEX) treatment parameters for enzymatic hydrolysis of corn stover. *Bioresour. Technol.* 96, 18, 2014-2018, 0960-8524

- Titgemeyer, EC., Cochran, RC., Towne, EG., Armendariz, CK., & Olson, KC. (1996). Elucidation of factors associated with the maturity-related decline in degradability of big bluestem cell wall. *J Animal Sci.*, 74, 3, 648-657, 0021-8812
- Toma's-Pejo', E., Oliva, JM., Ballesteros, M., & Olsson, L. (2008). Comparison of SHF and SSF processes from steam-exploded wheat straw for ethanol production by xylose-fermenting and robust glucose-fermenting *Saccharomyces cerevisiae* strains. *Biotechnol. Bioeng.*, 100, 6, 1122-1131, 1097-0290
- Torget, R., Walter, P., Himmel, M., & Grohmann, K. (1991). Dilute acid pretreatment of corn residues and short-rotation woody crops. *Appl. Biochem. Biotechnol.*, 28/29, 75-86, 0273-2289
- Tucker, MP., Kim, KH., Newman, MM., & Nguyen, QA. (2003). Effects of temperature and moisture on dilute-acid steam explosion pretreatment of corn stover and cellulase enzyme digestibility. *Appl. Biochem. Biotechnol.* 105-108, 165-177, 0273-2289
- Vainionpaa, J., & Malkki, Y. (1987). Extrusion cooking in the manufacture of intermediate moisture food and feed. In *7th World Congress of Food Science and Technology*, Ghee AH (ed.). Singapore Institute of Food Science and Technology: Singapore, 1987, pp. 338- 345
- van Walsum, G., Allen, SG., Spencer, MJ., Laser, MS., Antal, MJ., & Lynd, LR. (1996). Conversion of lignocellulosics pretreated with hot compressed liquid water to ethanol. *Appl. Biochem. Biotechnol.*, 57/58, 157-170, 0273-2289
- Varga, E., Szengyel, Z., & Reczey, K. (2002). Chemical pretreatments of corn stover for enhancing enzymatic digestibility. *Appl. Biochem. Biotechnol.*, 98-100, 73-87, 0273-2289
- Varga, E., Schmidt, AS., Reczey, K., & Thomsen, AB. (2003). Pretreatment of corn stover using wet oxidation to enhance enzymatic digestibility. *Appl. Biochem. Biotechnol.*, 104, 37-50, 0273-2289
- Weiss, ND., Nagle, NJ., Tucker, MP., & Elander, RT. (2009). High xylose yields from dilute acid pretreatment of corn stover under process-relevant conditions. *Appl. Biochem. Biotechnol.*, 155, 1-3, 418-428, 0273-2289
- Xin, L., & Saka, S. (2008). Optimization of Japanese beech hydrolysis treated with batch hot-compressed water by response surface methodology. *Inter. J Agric. Bio. Eng.*, 1, 2, 239-245, 1934-6352
- Xu, J., Thomsen, MH., & Thomsen, AB. (2009a). Pretreatment on corn stover with low concentration of formic acid. *J Microbiol. Biotechnol.*, 19, 8, 845-850, 1738-8872
- Xu, J., Thomsen, MH., & Thomsen, AB. (2009b). Enzymatic hydrolysis and fermentability of corn stover pretreated by lactic acid and/or acetic acid. *J Biotechnol.*, 139, 4, 300-305, 0168-1656
- Yan, L., Zhang, H., Chen, J., Lin, Z., Jin, Q., Ji, H., & Huang, H. (2009). Dilute sulfuric acid cycle spray flow-through pretreatment of corn stover for enhancement of sugar recovery. *Bioresour. Technol.*, 100, 5, 1803-1808, 0960-8524
- Yang, C., Shen, Z., Yu, G., & Wang, J. (2008). Effect and aftereffect of γ - radiation pretreatment on enzymatic hydrolysis of wheat straw. *Bioresour. Technol.*, 99, 14, 6240-6245, 0960-8524
- Yeh, A-I., & Jaw, Y-M. (1998). Modeling residence time distributions for single screw extrusion process. *J Food Eng.*, 35, 211-232, 0260-8774

- Yu, L., Ramaswamy, HS., & Boye, J. (2009). Twin-screw extrusion of corn flour and soy protein isolate (spi) blends: A response surface analysis. *Food Bioprocess Technol.*, DOI 10.1007/s11947-009-0294-8, 1935-5149
- Yu, G., Yano, S., Inoue, H., Inoue, S., Endo, T., & Sawayama, S. (2010). Pretreatment of rice straw by a hot-compressed water process for enzymatic hydrolysis. *Appl. Biochem. Biotechnol.*, 160, 2, 539-551, 0273-2289
- Zeng, M., Mosier, NS., Huang, C-P., Sherman, DM., & Ladisch, MR. (2007). Microscopic examination of changes of plant cell structure in corn stover due to hot water pretreatment and enzymatic hydrolysis. *Biotechnol. Bioeng.*, 97, 265-278, 1097-0290
- Zhu, Y., Lee, YY., & Elander, RT. (2004). Dilute-acid pretreatment of corn stover using a high-solids percolation reactor. *Appl. Biochem. Biotechnol.*, 117, 103-114, 0273-2289
- Zhu, Y., Lee, YY., & Elander, RT. (2005). Optimization of dilute-acid pretreatment of corn stover using a high-solids percolation reactor. *Appl. Biochem. Biotechnol.*, 124, 1-3, 1045-1054, 0273-2289
- Zhu, Z., Sathitsuksanoh, N., Vinzant, T., Schell, DJ., McMillan, JD., & Zhang, Y-HP. (2009). Comparative study of corn stover pretreated by dilute acid and cellulose solvent-based lignocellulose fractionation: Enzymatic hydrolysis, supramolecular structure, and substrate accessibility. *Biotechnol. Bioeng.*, 103, 4, 715-724, 1097-0290
- Zimbardi, F., Viola, E., Nanna, F., Larocca, E., Cardinale, M., & Barisano, D. (2007). Acid impregnation and steam explosion of corn stover in batch processes. *Ind. Crops Prod.*, 26, 2, 195-206, 0926-6690

IntechOpen

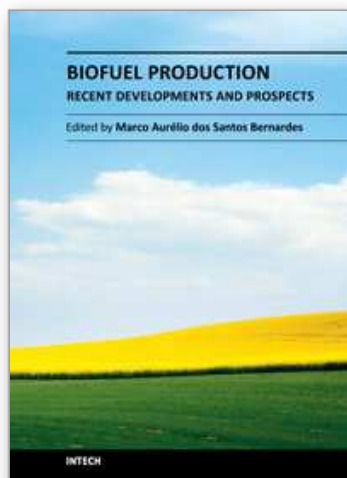

Biofuel Production-Recent Developments and Prospects

Edited by Dr. Marco Aurelio Dos Santos Bernardes

ISBN 978-953-307-478-8

Hard cover, 596 pages

Publisher InTech

Published online 15, September, 2011

Published in print edition September, 2011

This book aspires to be a comprehensive summary of current biofuels issues and thereby contribute to the understanding of this important topic. Readers will find themes including biofuels development efforts, their implications for the food industry, current and future biofuels crops, the successful Brazilian ethanol program, insights of the first, second, third and fourth biofuel generations, advanced biofuel production techniques, related waste treatment, emissions and environmental impacts, water consumption, produced allergens and toxins. Additionally, the biofuel policy discussion is expected to be continuing in the foreseeable future and the reading of the biofuels features dealt with in this book, are recommended for anyone interested in understanding this diverse and developing theme.

How to reference

In order to correctly reference this scholarly work, feel free to copy and paste the following:

Chinnadurai Karunanithy and Kasiviswanathan Muthukumarappan (2011). Application of Response Surface Methodology to Optimize Alkali Concentration, Corn Stover Particle Size, and Extruder Parameters for Maximum Sugar Recovery, Biofuel Production-Recent Developments and Prospects, Dr. Marco Aurelio Dos Santos Bernardes (Ed.), ISBN: 978-953-307-478-8, InTech, Available from:

<http://www.intechopen.com/books/biofuel-production-recent-developments-and-prospects/application-of-response-surface-methodology-to-optimize-alkali-concentration-corn-stover-particle-si>

INTECH
open science | open minds

InTech Europe

University Campus STeP Ri
Slavka Krautzeka 83/A
51000 Rijeka, Croatia
Phone: +385 (51) 770 447
Fax: +385 (51) 686 166
www.intechopen.com

InTech China

Unit 405, Office Block, Hotel Equatorial Shanghai
No.65, Yan An Road (West), Shanghai, 200040, China
中国上海市延安西路65号上海国际贵都大饭店办公楼405单元
Phone: +86-21-62489820
Fax: +86-21-62489821

© 2011 The Author(s). Licensee IntechOpen. This chapter is distributed under the terms of the [Creative Commons Attribution-NonCommercial-ShareAlike-3.0 License](https://creativecommons.org/licenses/by-nc-sa/3.0/), which permits use, distribution and reproduction for non-commercial purposes, provided the original is properly cited and derivative works building on this content are distributed under the same license.

IntechOpen

IntechOpen