

We are IntechOpen, the world's leading publisher of Open Access books Built by scientists, for scientists

6,900

Open access books available

186,000

International authors and editors

200M

Downloads

Our authors are among the

154

Countries delivered to

TOP 1%

most cited scientists

12.2%

Contributors from top 500 universities



WEB OF SCIENCE™

Selection of our books indexed in the Book Citation Index
in Web of Science™ Core Collection (BKCI)

Interested in publishing with us?
Contact book.department@intechopen.com

Numbers displayed above are based on latest data collected.
For more information visit www.intechopen.com



Theories and Methods for the Emergency Rescue System

Jianfeng Li^{1,2}, Wenmao Liu² and Bin Zhang¹

¹*School of Environment, Tsinghua University, Beijing,*

²*Institutes of Education, Tsinghua University, Beijing,*

³*Beijing Municipal Institute of Labor Protections,
Beijing Academy of Science and Technology, Beijing,
P.R. China*

1. Introduction

According to the “China State Plan for Rapid Response to Public Emergencies” (hereinafter referred to as “Plan”), which was published by the Central Government of the People’s Republic of China, “public emergencies” refer to those emergencies that happened suddenly, and would (or might) cause heavy casualties and property loss, damage ecological environment, bring severe harms to our society and threat public safety. In the “Plan”, public emergencies were divided into four categories: natural disasters, accidental disasters, public emergencies and social security events.

Since long time ago, the progress of human society has been achieved at the cost of deteriorating our living environment. Consequently, the number of natural or manmade disasters has been increasing. Earthquakes, floods, hurricanes, nuclear leakages, sudden outbreak of infectious diseases, fires and explosions attacked the human-beings one after another. For example, the Great Hanshin Earthquake in Japan in 1995, the “September 21” Earthquake in Taiwan in 1998, the “September 11” Terrorist Attack in US in 2001, the “August 14” Power Failure in US and Canada in 2003, and the disastrous Indian Ocean Tsunami in 2005, have brought severe losses to local economy, peoples’ life and property.

As we all know, public emergencies, particularly natural disasters, are unavoidable. But we could reduce the loss of disasters to a minimum, or even eliminate the negative impact of disasters, by designing an appropriate emergency rescue system. For example, in 2005, the southern United States was attacked by Hurricane Katrina. The local government failed to allocate emergency resources in a timely manner. Consequently, the local people didn’t have enough emergency supplies, such as food, drinking water, the necessities of life and medicine. Due to the severe shortage of emergency supplies, many disaster-stricken people resorted to violence. Riots occurred in many places, making the situation even worse.

Another example is the 7.6-magnitude earthquake happened on South Asian Subcontinent in October 2005. The disaster-stricken areas were faced with several problems: 1) Water supply was interrupted. The local residents didn’t have food to eat. 2) Hospitals were shut down. The residents were in urgent need of medical care. 3) The traffic conditions were poor

in disaster-stricken areas. The disaster-stricken people didn't have enough emergency resources to make their living. Consequently, they ransacked shops for food and medicine and severely undermined the local social order.

These two examples have fully revealed the importance of designing a sophisticated emergency rescue system. The loss of public emergencies would be greatly reduced by understanding the distribution of disaster-stricken people and providing appropriate emergency resources to them. Otherwise, the public emergencies would be uncontrollable. To make things worse, the situation of disasters might be more serious, and even lead to the breakout of secondary disasters.

2. Problem statement

When we design an emergency rescue system, we need to coordinate the manpower with the financial, material resources. It is a complicated process to optimally allocate various elements within a system. It involves a wide range of contents. Repeated researches should be made on several theories and methods. Designing of an emergency rescue system covers the following four aspects (See Figure 1):

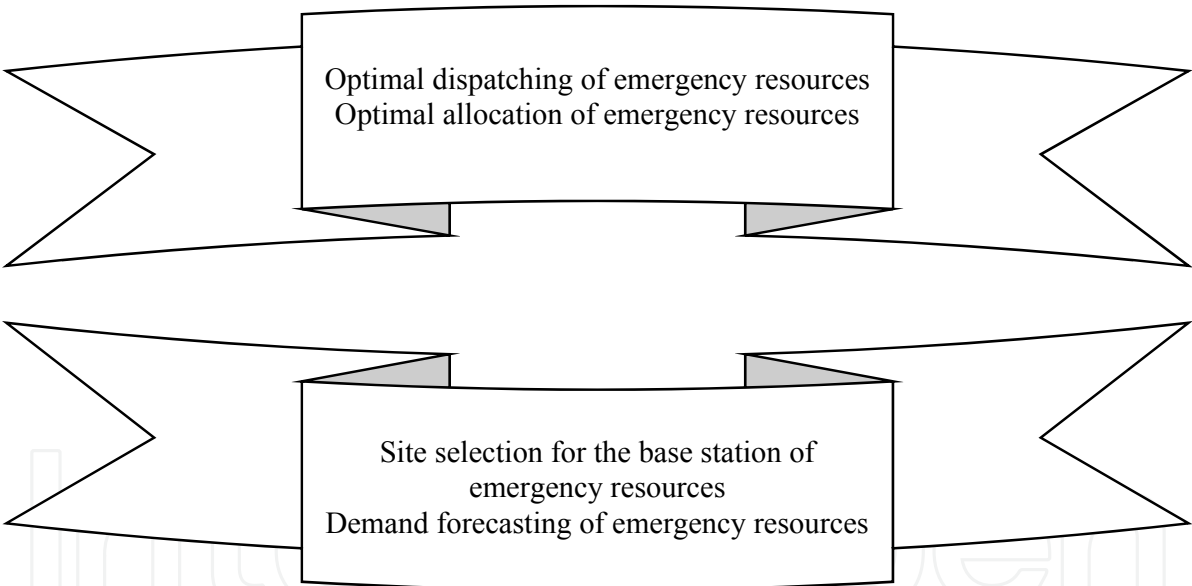


Fig. 1. Research Course for the Emergency Rescue System.

These four aspects have been cross-linked each other essentially.

1. Demand Forecasting of Emergency Resources

In recent years, unconventional emergencies frequently broke out, severely endangered people's life and property. How to timely predict people's demand on resources after the disasters? This issue has become an important problem for us.

Here, a precise predictive method has been designed by combining the Fuzzy Set Theory with the Learning Rules of Hebb Neural Network, Multiple Linear Regression and Case

Reasoning. By applying this method, we have solved the problems of information insufficiency and inaccuracy when we predict the resource demand after unconventional emergencies, and could correctly predict people's demand on resources.

2. Optimal Site Selection for the Base Station of Emergency Resources

If the resource demand has been determined, sufficient emergency resources need to be transported to the emergency base stations (Emergency rescue station). To achieve this goal, how many base stations for emergency resources should be established, and where should we establish these stations, these issues will be worth considering. In other words, we should optimally select the sites of base stations and find appropriate locations within a certain region as the base stations of emergency resources. The number of location should also be suitable. When disasters break out, we could allocate resources from these base stations to deal with the emergencies. By optimally selecting the sites of base stations, we could not only reduce costs, but could also ensure the timeliness of emergency resources, making these resources arrive at the emergency scenes quickly, safely and timely.

Here, a summarization has been made on relevant site selection knowledge, and the Operations Research theories have been applied based on the existing site selection methods. A multistage model of site selection has been designed to make an optimal planning on the number and location of base stations. Example analysis has also been made to verify the results of calculation. It has been proved that this model is simple, convenient for use, and could get results quickly. This model would be suitable for the site selection and planning of base stations of emergency resources.

3. Appropriate Allocation of Emergency Resources

The emergency resources deployment is a hardcore of emergency management. After the happening of the public emergency, it is important to study how to deliver the emergency resources to base stations quickly. When we've determined the location of base stations, we should optimally allocate emergency resources. More to this point, it should predetermine the number, type and quality of resources for each base station. Otherwise, there's an important constraint condition for us to consider: the costs.

This chapter proposed the dynamic optimal process of emergency resources deployment planning, making use of Markov decision processes, and discovered the optimal deployment planning to guarantee the timelines.

4. Optimal Dispatching of Emergency Resources

Aiming at solving the resource allocation problems in case of emergency events, this chapter presented an optimum mathematical simulation model based on the dynamic programming.

In accordance with the number of emergency base stations, the given model tries to divide the resource allocation procedure into the some stages. The stated variable stands for the amount of the emergency resource available for allocation can be used at the beginning of each stage. As is depicted in the dynamic programming theory, the remaining resource of the previous stage may have a strong influence on the succeeding stage. During each stage, three factors may restrict the object function, that is, the remaining resource, the decision, and the demand. The total function is the sum of the object function of each stage. In

addition, the concrete case can be used to confirm the model's validity and practicability. The results of our repetitive experimental application of the model show that it works perfectly for its duty in improving the efficiency of emergency management and overcoming the problem of wasting emergency resource as well as low efficiency in emergency rescue.

3. Methods

3.1 Emergency resources demand prediction using case-based reasoning

3.1.1 Research background

Public emergencies usually bring great negative impacts on economy and society, cause damage on casualties and property, bring destructions on ecological environment and human living environments, have adverse impacts on social order and public safety, and even arise social and political instability. Moreover, due to the change and influence of multiple factors, the type, occurrence probability and influence degree of public emergencies are increasing.

The demand on emergency resources refers to the minimum guarantee requirements for effective response to public emergencies. The so-called effective response refers to that the response on public emergencies should be efficient, and it also refers to that the emergency resources should be used with high efficiency. While the minimum guarantee requirements refer to that the smallest demands are needed when public emergencies are successfully solved. Obviously, an optimized idea is involved in the determination of emergency resource demand, meaning that under some given parameters such as type, intensity and influencing range of Emergency response, the smallest resource demand required for the successful response to public emergencies.

Currently, there are few researches on this aspect, in most cases the emergency decision maker subjectively decides whether the quantity, quality and type of emergency resources are rational and can meet the requirements of emergency. Besides, due to the particularity of emergency process, the effect of cost is smaller than that of time effect, so that in many cases, no efforts are spared to conduct the emergency rescue. But the method is easily to cause the irrational demand of emergency resources, so that it is unscientific and will cause groundless waste of numerous resources, meaning that a scientific prediction method is sorely needed to achieve the prediction on the demand of emergency resources.

Case-based reasoning (CBR) is a relatively new problem solving technique that is attracting increasing attention. For a long time, expert systems or knowledge-based systems (KBS) are one of the success choices in Artificial Intelligence (AI) research. The *first generation* KBS, and today's systems, are based upon an explicit model of the knowledge required to solve a problem. When it comes to so called *second generation* systems, a deep causal model was adopted to enable a system to reason using first principles [1]. But whether the knowledge is shallow or deep an explicit model of the domain must still be elicited and implemented often in the form of rules or perhaps more recently as object models. However, knowledge elicitation is a difficult process, often being referred to as the knowledge elicitation bottleneck; implementing KBS is a difficult and slow process requiring special skills; and once implemented they are difficult to maintain [2-6].

Over the last few years an alternative reasoning paradigm and computational problem solving method has increasingly attracted more and more attention. Case-based reasoning (CBR) solves new problems by adapting previously successful solutions to similar problems. CBR is attracting attention because it seems to directly address the problems outlined above. CBR does not require an explicit domain model and so elicitation becomes a task of gathering case histories, implementation is reduced to identifying significant features that describe a case, an easier task than creating an explicit model, by applying database techniques largely volumes of information can be managed, and CBR systems can learn by acquiring new knowledge as cases thus making maintenance easier.

The work Schank and Abelson in 1977 is widely held to be the origins of CBR [7]. They proposed that our general knowledge about situations is recorded as scripts that allow us to set up expectations and perform inferences. Whilst the philosophical roots of CBR could perhaps be claimed by many what is not in doubt is that it was the work of Roger Schank's group at Yale University in the early eighties that produced both a cognitive model for CBR and the first CBR applications based upon this model [8]. Janet Kolodner developed the first CBR system called CYRUS [9-11]. An alternative approach came from Bruce Porter's work, at The University of Texas in Austin, into heuristic classification and machine learning resulting in the PROTOS system [12-13].

In the U.S., Edwina Rissland's group at the University of Massachusetts in Amherst developed HYPO [14]. This system was later combined with rule-based reasoning to produce CABARET [15].

In Europe, the first one is that of Derek Sleeman's group from Aberdeen in Scotland. They studied the uses of cases for knowledge acquisition, developing the REFINER system [16]. Mike Keane, from Trinity College Dublin, undertook cognitive science research into analogical reasoning [17]. Michael Richter and Klaus Althoff in the University of Kaiserslautern applied CBR to complex diagnosis [18]. This has given rise to the PATDEX system [19] and subsequently to the CBR tool S3-Case. In the University of Trondheim, Agnar Aamodt has investigated the learning facet of CBR and the combination of cases and general domain knowledge resulting in CREEK [20-21].

In the UK, CBR seemed to be particularly applied to civil engineering. A group at the University of Salford was applying CBR techniques to fault diagnosis, repair and refurbishment of buildings [22]. Yang & Robertson [23] in Edinburgh developed a CBR system for interpreting building regulations, a domain reliant upon the concept of precedence. Another group in Wales applied CBR to the design of motorway bridges [24].

Further, there are active CBR groups in Israel [25-26], India [27] and Japan [28].

3.1.2 Methods for emergency resource demand prediction

According to the characteristics of emergency resource demand prediction process, both the risk analysis and case-based reasoning method are introduced into the process, accordingly a case-based reasoning method for emergency resource demand prediction based on risk analysis is obtained, which improves the scientificity of emergency resource demand. The case-based reasoning flow for emergency resource demand prediction based on risk analysis is shown in Fig.2.

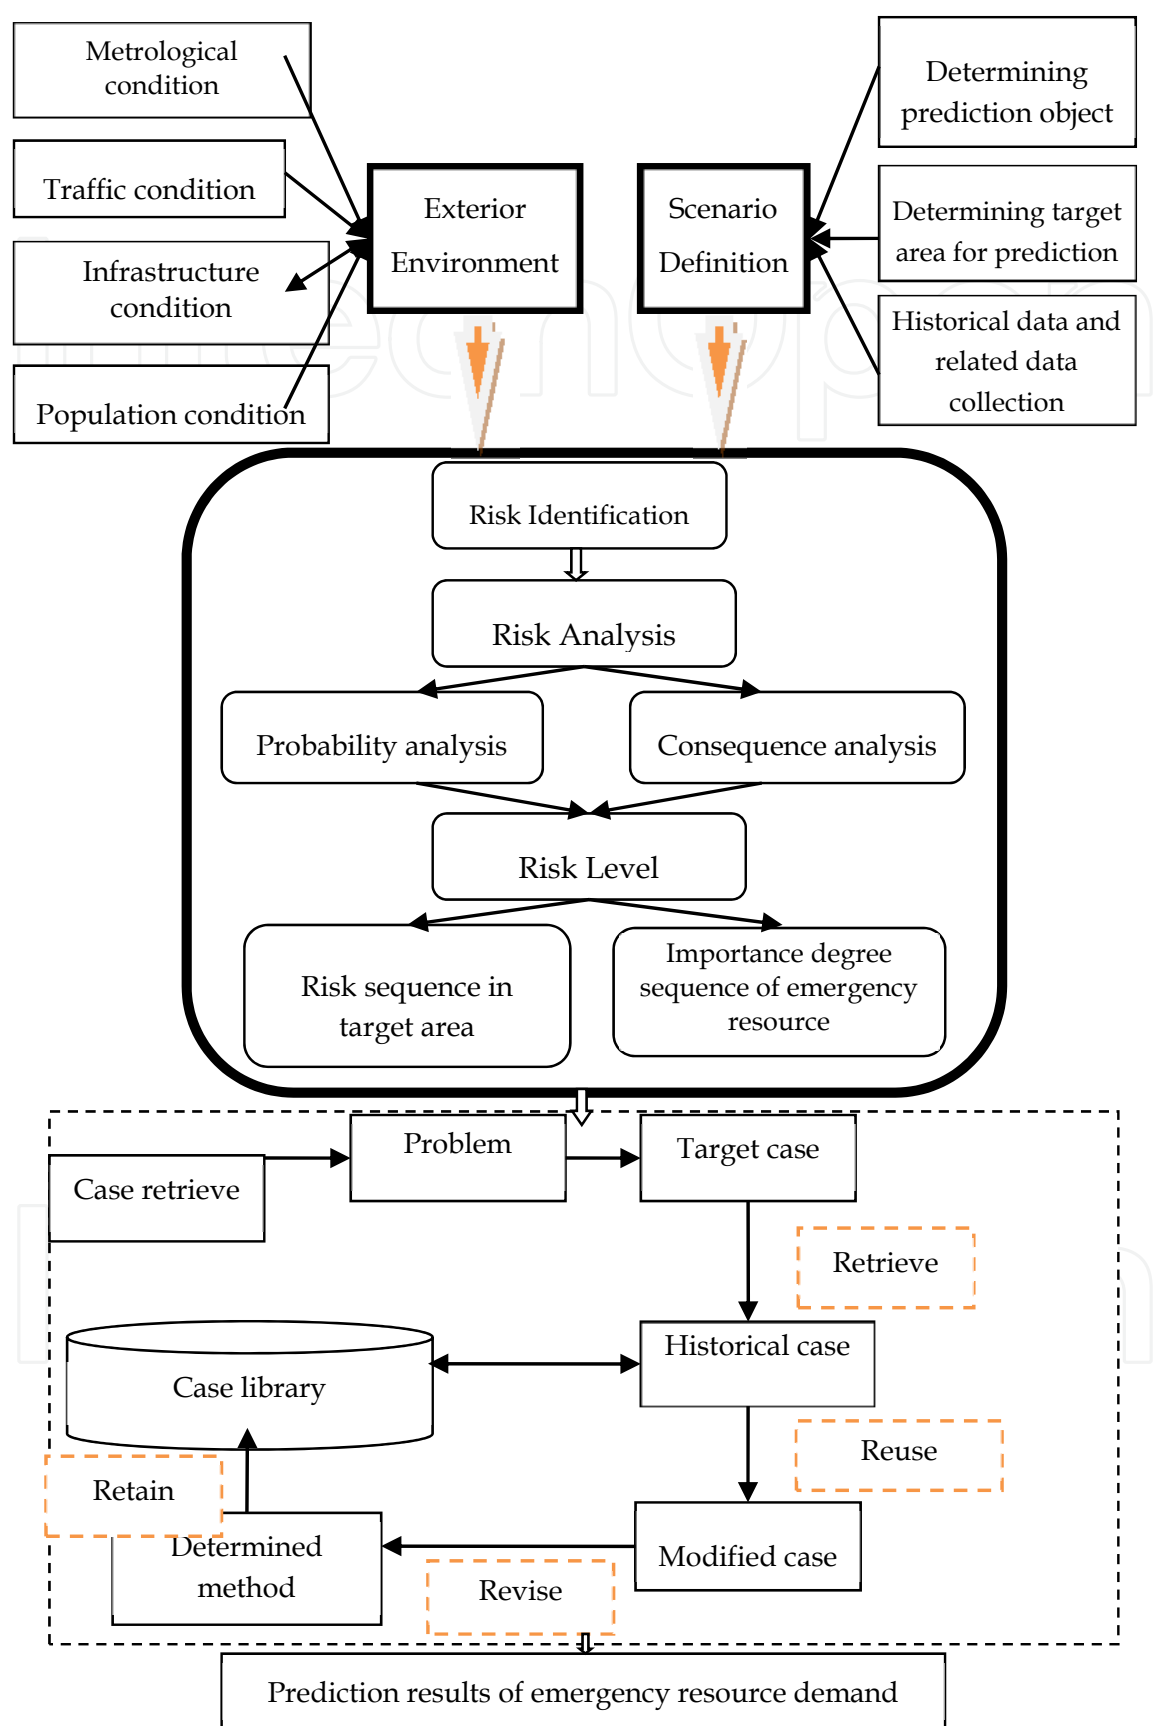


Fig. 2. Case-based reasoning prediction on emergency resource demand based on risk analysis.

The case-based reasoning is a comprehensive form of three types of human thoughts including imaginal thinking, logical thinking and creative thinking. From the view of reasoning method, the case-based reasoning is an analogy reasoning from one case (old case) to another case (new problem), while from the view of knowledge, the case-based reasoning is a method based on memory in which old experiences are used to guide the problems. The CBR is generally composed of four main processes, including retrieve, reuse, revise and retain [29-30], so that CBR is also called 4R.

Therefore, in this paper, the case-based reasoning prediction method associated with risk analysis process is used to conduct demand prediction on the quantity, quality and type of emergency resources. After conducting risk analysis on target area, characteristic values of risk in these are can be obtained, including possible incident type, incident results, occurrence probability of incident, etc., accordingly the case-based reasoning process can be used for emergency resource demand prediction.

1. Expression of case

The case generally includes two parts, including case attribute description and case solution, of which the former one is the index structure of case and the latter one is the answer of case. While the emergency resource demand prediction is composed of three parts, including characteristic description of Emergency response, characteristic description of emergency rescue plan and description of emergency resource demand, all of which can be determined based on the results of risk analysis, namely risk probability and risk results.

- Characteristic description of Emergency response: it includes some characteristic information of Emergency response, including type, intensity, natural environment surround the occurrence site, population density, losses, duration time of hazard, etc., all of which depict and describe the characteristic attributes of Emergency response.
- Characteristic description of emergency rescue plan: it includes the characteristic attributes of emergency object, emergency rescue method, emergency procedure, etc. If there is a difference in the emergency object, way, technique and process of Emergency response of the same type, the material demands will be different too.
- Description of emergency resource demand: it includes the quantity, quality and type of emergency resources.

On the whole, in order to obtain complete data, the case should be described in detail as can as possible under the specific condition. Generally, one case can be composed of several attributes, all of which can be further divided, while the whole case library is composed of associated cases at different attribute levels. Therefore, in the emergency resource demand prediction, the case can be modeled as follows:

$$\text{case } (F, P, D)$$

In the formula: $F=(f_1, f_2, \dots, f_n)$, f_n is a characteristic attribute of Emergency response, which can be obtained according to the results of risk analysis; $P=(p_1, p_2, \dots, p_n)$, p_n is a characteristic attribute of emergency rescue plan; D is the demand attribute of emergency resource.

2. Case-based reasoning process of emergency resource demand

a. Characterization of emergency resource demand case

Given that there are n cases in the case library, the case i is expressed as C_i ($i=1,2,\dots,n$). Its characteristic factor set $B=\{b_1, b_2, \dots, b_m\}$. Therefore, the membership function of case C_i to the characteristic factor b_j ($j=1,2,\dots,m$) is expressed as $n_{C_i}(b_j)$, and the characteristic vector corresponding to the case C_i in the case library is as follows:

$$V_{C_i} = \{n_{C_i}(b_1), n_{C_i}(b_2), \dots, n_{C_i}(b_m)\} = \{n_{C_i}(b_j) | j=1, 2, \dots, m\} \quad (1)$$

Given that the characteristic vector set of prediction plan is T , which can be expressed as the formula below:

$$V_T = \{n_T(b_1), n_T(b_2), \dots, n_T(b_m)\} = \{n_T(b_j) | j=1, 2, \dots, m\} \quad (2)$$

b. Emergency resource demand case retrieve-similarity calculation

According to the organization form of case, the nearest neighbour method is used. The nearest neighbour method is a method in which the cumulative sum of characteristic weights of the input case that is matched with the existing case in the case library is used to retrieve the case, namely that:

$$\frac{\sum_{i=1}^n w_i \text{sim}(b_i^I, b_i^R)}{\sum_{i=1}^n w_i} \quad (3)$$

In the formula above: w is the important weight value of characteristic factor, sim is the similarity function, b^I and b^R is the input case value and retrieve case value of characteristic factor i .

In the similarity matching of cases using the characteristics of case, the effect of each characteristic is different, so that in the similarity calculation, it is necessary to assign different weights to each characteristic factor.

Given that the influencing weight set of the characteristic factor set $B=\{b_1, b_2, \dots, b_m\}$ is $\{w_1, w_2, \dots, w_m\}$, and the following condition is satisfied:

$$\sum_{j=1}^m w_j = 1, \quad j=1, 2, \dots, m \quad (4)$$

Consequently, the similarity can be calculated by the formula below:

$$\text{sim}(A, B) = \frac{\sum_{j=1}^m w_j (n_A(x_j) \wedge n_B(x_j))}{\sum_{j=1}^m w_j (n_A(x_j) \vee n_B(x_j))} \quad (5)$$

In the formula (5), \wedge is the maximum lower limit, and \vee is the minimum upper limit.

c. Weight calculation of characteristic factor

Generally, under different decision-making environments, the same characteristic factor has different effects on the decision output. Given that $n(b)$ represents the value of case when the characteristic factor is b . If there is a large difference in distribution of $n(b)$ in the case library C ($C = \{c_1, c_2, \dots, c_n\}$), which indicates that the factor has great effect on classification identification, and it should be assigned a larger weight value. On the contrary, if there is a small difference in distribution of $n(b)$ in the case library C ($C = \{c_1, c_2, \dots, c_n\}$), which indicates that the factor has little effect on classification identification, and it should be assigned a smaller weight value.

Therefore, each case in the case library can be classified into one type. Given the case C_i takes the value of $n(b_j)$ when the characteristic factor is b_j , the membership function of the case to the characteristic factor b_j can be expressed as $n_{C_i}(b_j)$, and the formula below can be obtained:

$$\bar{n}(b_j) = \frac{1}{n} \sum_{j=1}^n n_{C_i}(b_j) \quad (6)$$

Thus, the mean square deviation is expressed as the formula below:

$$\delta(b_j) = \left[\frac{\sum_{i=1}^n (n_{C_i}(b_j) - \bar{n}(b_j))^2}{n} \right]^{\frac{1}{2}} \quad (7)$$

The weight w_j of each characteristic factor can be obtained by the formula below:

$$w_j = \frac{\delta(b_j)}{\sum_{j=1}^m \delta(b_j)}, \quad j = 1, 2, \dots, m \quad (8)$$

After the weight of characteristic factor is obtained, the similarity function is combined with the weight of characteristic factor, and the formula below can be obtained:

$$sim(T, C_i) = \frac{\sum_{j=1}^m w_j (n_T(x_j) \wedge n_{C_i}(x_j))}{\sum_{j=1}^m w_j (n_T(x_j) \vee n_{C_i}(x_j))} \geq \eta, \quad i = 1, 2, \dots, n \quad (9)$$

In the formula above, the similarity between target case T and C_i can be expressed as $\text{sim}(T, C_i) (\in [0, 1])$, η is a threshold value, and the learning strategies of case are divided into following types:

- a. $\forall \text{sim}(T, C_i) = 0, i \in [0, 1]$, the new case doesn't match with all cases in the case library, and it can be added into the case library;
- b. $\exists \text{sim}(T, C_i) = 1, i \in [0, 1]$, the new case is completely similar to certain case, and it can not added into the case library;
- c. $\forall \text{sim}(T, C_i) < \eta, i \in [0, 1]$, the new case can be added into the case library;
- d. $\forall \text{sim}(T, C_i) > \eta, i \in [0, 1]$, the solution for the case with maximum similarity ($\max[\text{sim}(T, C_i)]$) is converted into the solution for new case.

All cases in accordance with the similarity calculation formula are the similar cases, among which the one with the maximum $\text{sim}(T, C_i)$ is the most similar case. Accordingly, the material demands of the most similar case are taken as the prediction results of material demand when the Emergency response occurs.

3.2 Application of multi-stage location planning model in optimizing location of emergency resource base stations

3.2.1 Research background

Urban Planning refers to the specific method or process of predicting urban development and managing various resources to adapt to its development, to guide the design and development of built environments. While modern urban planning is trying to study the impact which a variety of economic, social and environmental factors have on the change of land using patterns, and develop planning reflecting the continuous interaction. Currently, in the process of making urban planning, parties have paid more and more attention to urban safety planning, in which the optimization of location planning of emergency logistics base station is one of the very important contents[31-33].

Emergency Logistics refers to the special logistics activities through which the necessary emergency supplies are provided to minimize the loss caused by unforeseen accidents and disasters in the shortest time, while an important role of emergency logistics base station (also known as emergency resource base station) is to provide adequate and timely emergency response resources to potential unforeseen accident or disaster sites[34-37].

The optimization of location planning of emergency resource base station includes determining reasonable position and scale of emergency resource base station, and since the special construction of emergency logistics base station costs a lot due to its specialization, so the optimization of the location planning of emergency resource base station should mainly start with two aspects, one is to determine the appropriate scale or the reasonable amount of emergency resource base stations, the other is to solve the problem of spatial distribution, namely, location optimization[38-40].

City T, as largest coastal open city in Northern China, currently has jurisdiction over 15 districts including Heping, Hedong, Nankai, Hexi, Hebei, Hongqiao, Tanggu, Hangu, Dagang, Dongli, Xiqing, Jinnan, Beichen, Wuqing, Baodi, and 3 counties such as Jinghai,

Ninghe and Jixian. It has a total area of 11,919.7 square kilometers, and a resident population of 1023.67 million. Table 1 shows the statistics of accidents this year in City T.

| Time | Accident | Death | Injured | Population/ 10 thousand | Accident rate 0/000 | Mortality rate 0/000 | Injured rate 0/000 |
|------|----------|-------|---------|----------------------------|---------------------------|----------------------------|--------------------------|
| 2004 | 10 | 32 | 27 | 1001 | 0.999 | 3.197 | 2.697 |
| 2005 | 9 | 37 | 25 | 1001 | 0.899 | 3.696 | 2.498 |
| 2006 | 1 | 9 | 3 | 1001 | 0.010 | 0.899 | 0.300 |
| 2007 | 9 | 21 | 5 | 1024 | 0.879 | 2.051 | 0.488 |

* Data derives from 2004~2007 Statistics of accident distribution in cities and provinces China in *Journal of Security and Environment*

Table 1. Statistics of accidents in recent years in City T*.

As can be seen from the table, City T is a metropolis with a good security situation, but in order to take preventive measures, it is very important and very necessary to carry out the optimization of location planning of emergency logistics base stations in City T. Therefore, in this paper, taking City T as the object, the author makes use of multi-stage location planning optimization model to study the location planning of emergency resource base stations in this city and seek a reasonable location planning program to provide a decision making basis for the future construction and development of City T.

3.2.2 Multi-stage location planning optimization model of emergency resource base station

An important role of emergency logistics base station is to provide adequate and timely emergency response resources to potential unforeseen accident or disaster sites. And the optimal planning of emergency logistics base station helps to make rational use and allocation of spaces and emergency resources, to reduce the risks the city, as well as conduce to the efficient, orderly and sustained operation of urban economy, social activities and construction activities.

The optimization of location planning of emergency resource base station includes determining reasonable position and scale of emergency resource base station. Therefore, the optimization of the location planning of emergency resource base station should mainly start with two aspects, one is to determine the appropriate scale of emergency resource base stations, and the other is to solve the problem of spatial distribution.

The first step is to use set covering model to determine the minimum number of emergency resource base stations which can meet the needs of all demand sites; and the second step is to use maximum coverage model to determine the optimal sites of the minimum number of emergency resource base stations among the options, to meet the needs of all demand sites to the maximum.

a. Scale optimization - set covering model

Coverage model is one of the most basic models of optimal planning of emergency resource base stations. The meaning of coverage refers to that the services scope of emergency

resource base stations set up should be able to cover all sites requiring service. And it is one of the common goals of optimal planning of emergency logistics base station to cover all demand sites with the minimum number of emergency logistics base stations.

Set covering model is simple, but highly practical. It can be used to determine the most efficient number the emergency resource base stations covering all demand sites. Since the investment in emergency resource base stations can be quite expensive, so decision-makers need to keep a minimum number of base stations at the same time of taking providing services of necessary level to each demand site into account, therefore, they need to determine the reasonable number of emergency logistics base station under the limitation of covering distance or covering time.

The binary decision variable x_j is set as follows: When the candidate site j is selected, $x_j = 1$; otherwise $x_j = 0$. if the set of candidate sites which can cover all the demand sites i is $N_i = \{j \mid d_{ij} \leq S\}$ (or $N_i = \{j \mid t_{ij} \leq R\}$), the minimum number of the necessary facilities which can cover all the demand sites may be decided by set covering model:

$$\begin{aligned} \min \quad & z = \sum_{j \in J} x_j \\ \text{s.t.} \quad & \sum_{j \in N_i} x_j \geq 1 \quad \forall i \in I \\ & x_j \in (0,1) \quad \forall j \in J \end{aligned} \quad (10)$$

In which the objective function can minimize the number of base stations, the constraint 1 can ensure that each demand site is covered by at least one emergency resource base station, and it is one of the basic objectives of optimal planning of emergency resource base station. The constraint 2 limits the decision variables x_j as integer variables between (0, 1).

Set covering model is of integer linear programming model, mathematically, it is a typical NP-hard model. Generally, its solution can be obtained through relaxing integer limiting requirement against x_j , using the procedure of general linear programming, and in most cases, integer solution of general problems can be directly obtained.

b. Space layout optimization - maximum coverage model

After the first phase of finding model solution, the number of emergency resources base stations providing services to all the demand sites in the whole region can be determined. Being clear about the number of base stations, the goal of the second stage is to optimize the spatial layout of these emergency resource base stations, to enable them to meet emergency requirements.

Maximum coverage model is an extension and expansion of set covering model. This model can be used to consider the maximization of demand site value coverage (population or other indicators). Maximum coverage model was originally presented by Church and ReVelle, where d_i refers to the demand of node i , p refers to the available emergency resources. Binary variables y_i can be used to present whether the demand site is overwritten or not, when the demand site is overwritten, $y_i = 1$, otherwise $y_i = 0$.

$$\begin{aligned}
& \text{Maximize } \sum_{i \in V} d_i y_i \\
& \text{subject to} \\
& \sum_{j \in W_i} x_j \geq y_i \quad (i \in V) \\
& \sum_{j \in W} x_j = p \\
& x_j \in \{0,1\} \quad (j \in W) \\
& y_i \in \{0,1\} \quad (i \in V)
\end{aligned} \tag{11}$$

Maximum coverage model can be used to seek the best possible using method of available resources, but does not guarantee to cover all demand sites. Therefore, maximum coverage model can be used to determine the optimal solution of maximum coverage on the base of the optimal solution of set coverage.

3.3 Appropriate allocation of emergency resources

3.3.1 Research background

At present, our country is in an important opportunity period for economic and social development, which is also the crucial period to implement the third-step strategic deployment of the modernization construction; therefore, the important task of our country is to maintain the long-term harmonious and stable social environment and stable and united situation. As the most important link in emergency handling, the contingency plan strengthens the research in respect of optimized resource allocation, which has very important significance for promoting the technological level of dealing with unexpected accidents and emergency management capacity of our country, guaranteeing public safety in our country and establishing reasonable and efficient contingency plans for national public safety.

The emergency resource management process of unexpected public events is in fact a set of decisions and decision implementation processes under a series of goal constraint conditions. These series of decisions and decision implementation processes mean "when and which resources at which place to allocate, and what to do". It is necessary to invest in enhancing urban comprehensive emergency capability, which proposes the problems of optimized allocation and dispatch of limited emergency resources, and the problem solving relates to whether the limited resources can exert the greatest effect, whether the emergency rescue system can achieve the desired goal and so on. At present, the researches related to emergency resource allocation practically aim at single resource optimization, such as the emergency service vehicle dispatch or vehicle relocation problems. When the emergency service vehicle system receives the service demand, it dispatches its emergency response unit (such as police car, fire engine, ambulance and so on) to the service demand zone. After

an emergency service vehicle is dispatched for service, it is necessary to study the vehicle relocation problems to guarantee the defence demand in remaining zones. Studies on the emergency resource allocation beyond service vehicles are still at the initial stage. In China, Liu Chunlin et al (1999) studied the minimized transportation time problems of emergency resource allocation in continuous consumption system and one-off consumption system [41]; Liu Chunlin et al (2000) studied the emergency problems when the required time from the depot to emergency zone is a fuzzy number. In overseas countries, Fiorucci et al (2005) studied the emergency resource allocation and scheduling problems before and after the fire through building a dynamic model; Fiedrich et al (2000) studied the problems of simultaneous resource allocation for different disaster relief tasks and so on through building a dynamic programming model [42]. At the present stage, there are fewer studies on optimized allocation of many resources under unexpected accident disasters, moreover the majority of studies only take shortest emergency time as the optimized objective of the system, and the optimized method is too simple, and lacks consideration of the complexity of the emergency process; in addition, static models are more widely used in the studies, which lack emergency resource allocation parameters reflecting the accident disaster development status.

The present research aims at enhancing the urban emergency management capacity, establishes the emergency resource allocation model in view of many accident disasters, so as to effectively integrate various emergency resources, and reduce the investment cost of emergency resource management.

3.3.2 Optimized resource allocation model

3.3.2.1 Decision model based on dynamic programming

The emergency resource allocation process is divided into N corresponding stages in view of the accident disaster emergency management characteristics, using the dynamic programming method, and according to the number of emergency zones (the number is supposed as N), based on which, a mathematical model is built, so as to optimize the emergency resource allocation. In the emergency process, a certain amount of resources are allocated to meet the emergency demand, and various parameter variables are expressed as follows.

k is the emergency stage ($k=1,2,\dots,N$); x_k is the state variable in the dynamic programming model, representing the gross amount of allocated emergency resources at the k_{th} stage; u_k is the decision variable in the model, representing the alternative decision scheme; w_k represents the emergency resource demand at the k_{th} stage with given probability distribution. D_k is the set of all decision variables from 1st stage to the k_{th} stage.

Suppose that w_1, w_2, \dots, w_N are independent random variables depending on the disaster situation at emergency zones. The relationship between allocatable resource x_k , emergency resource demand w_k and emergency decision variables u_k in the emergency process is shown in Figure 3.

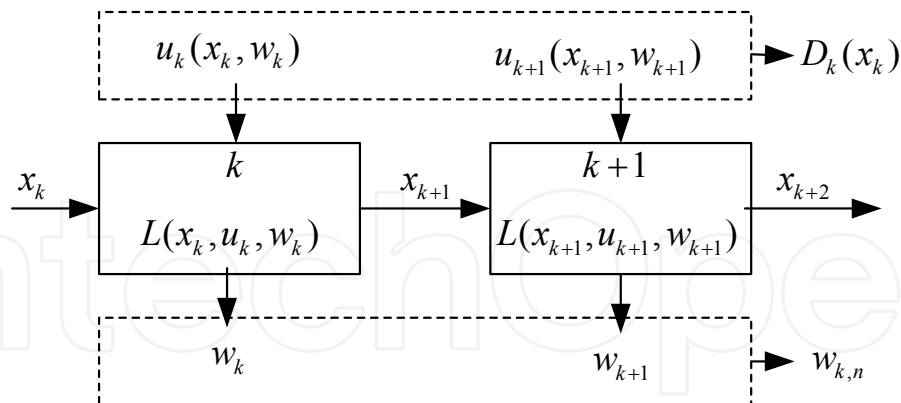


Fig. 3. The relation of proximate emergency stages based on dynamic programming.

For the $(k+1)$ th stage, the dynamic system has

$$x_{k+1} = f(x_k, u_k, w_k) (k = 0, 1, 2, \dots, N-1) \quad (12)$$

Where, N is the number of emergency zones in the emergency process.

The decision function sequence composed of the decision $u_k(x_k)$ ($k = 1, 2, \dots, N$) at each stage is called the whole process strategy, strategy for short. Strategy refers to the set of all emergency resource allocation decisions established at any emergency stage, which is only related to the stage and state in that stage process, and is expressed as $p(x_k)$

$$p(x_k) = (u_1(x_1), u_2(x_2), \dots, u_N(x_N)) \quad (13)$$

For the objective function J with given state and decisions, it can be expressed as

$$J = J(x(0), x(1), \dots, x(N); u(0), u(1), \dots, u(N)) \quad (14)$$

An appropriate u value (namely, appropriate decision sequence) is selected, so as to minimize J (or use other evaluation standards of J , such as the maximization of J), and optimize the objective function. Function J is called the criterion function.

3.3.2.2 Establishment of an optimized resource allocation model

The decision-making process at the N th stage is determined using the following factors.

$$(x(0), x(1), \dots, x(N); u(0), u(1), \dots, u(N)) \quad (15)$$

$x_{k+1} = f(x_k, u_k, w_k)$ ($k = 0, 1, 2, \dots, N-1$), and $x(0)$ is the known initial state, suppose that all $x(k)$ ($k = 1, 2, \dots, N$) can be expressed as $x(0)$ and $u(k)$ ($k = 0, 1, \dots, N-1$), so the criterion function

$$J = J(x(0), u(0), u(1), \dots, u(N)) \quad (16)$$

$x(0)$ is the given initial state, decision $u(k)$ ($k = 0, 1, \dots, N$) is free variables, so the simultaneous nonlinear equation

$$\frac{\partial J}{\partial u(k)} = 0, (k = 0, 1, \dots, N) \quad (17)$$

To solve practical problems, it is necessary to analyze and calculate the form of limit criterion function J in multistage decision process. In the present model

$$u(k) = u(x(k), w(k), k) \quad (18)$$

i.e., the existing decision is only the function of existing state and stochastic disturbance.

The criterion function of emergency resource allocation has Markov properties, i.e., the objective function has the following attributes

$$J = \sum_{k=0}^N L(x(k), u(k), w(k)) \quad (19)$$

Where, $L(x(k), u(k), w(k))$ is the objective function at each stage of the emergency process. In this model, L is a nonnegative function depending on the state and sum of decision items at a single stage. J is the objective function of the whole emergency process, equivalent to the sum of objective functions at all stages.

In general, it is known that a group of states $x(k) \in X$, and X is available emergency resources, then a new group of states $x(k+1)$ can be obtained according to $x(k)$ with the computing formula as

$$x(k+1) = f(x(k), u(k), w(k)) \quad (20)$$

At the same time, $J(x(k+1), k+1)$ can also be calculated

$$J(x(k+1), k+1) = L(x(k+1), u(k+1), w(k+1)) + J(x(k), k) \quad (21)$$

So the total cost function of the emergency process of any systematic sample can be expressed as

$$\begin{cases} J_{k+1}(x_{k+1}) = \min \sum_{k=1}^{N-1} L_k = \min(L_{k+1}(x_{k+1}, u_{k+1}, w_{k+1}) + J_k(x_k)) \\ \text{s.t. } u_k \in p_k(x_k) \\ L_0(x_1) = 0 \\ \frac{\partial J}{\partial u(k)} = 0 \end{cases} \quad (22)$$

3.4 Optimal dispatching of emergency resources

3.4.1 Research background

It is necessary for the emergency command department to make the emergency resource scheduling decisions after the occurrence of sudden public events. It is necessary for

emergency decision-makers to determine future resource scheduling according to the emergency resource demand situation at the present stage, and multi-stage emergency resource scheduling with the event development and changes and according to the emergency effect at the last stage and present situation. Therefore, the emergency resource scheduling is a dynamic process. Under the situation that the emergency resource site layout and allocation is known, emergency managers are concerned about the problems of how to formulate optimized scheduling scheme, guarantee the timeliness of emergency resource scheduling, and minimize the resource arrival time [43-44]. As a result, it is necessary to formulate beforehand the optimized scheme of emergency resource scheduling in the light of the specific scene of sudden public events, so as to start the emergency resource scheduling scheme as early as possible and guarantee the timeliness of emergency rescue action.

The Markov decision process can select an action from the available action set to make a decision according to the observed state at each moment. Meanwhile, the decision makers can make another new decision according to the newly observed state, and repeat such process [45]. Therefore, this section plans to study the dynamic optimization of emergency resource scheduling of sudden public events using the Markov decision process, so as to provide a basis for optimized emergency resource scheduling under sudden public events

3.4.2 Dynamic Markov decision of emergency resource scheduling

Due to a series of characteristics of sudden public events, such as nonrepeatedness, uniqueness, gradual evolution and so on, the decision-making problems for emergency resource scheduling have three main characteristics: sudden public event is dynamically changing; information about the event development is from fuzziness to clearness and from incompleteness to completeness, namely the future state is uncertain; the scheme formulated under incomplete information can be easily adjusted in time under complete information.

The optimized emergency resource scheduling can be more scientifically and reasonably realized by referring to the Markov decision analysis method, but sudden public events are not evolved and developed according to the pre-established direction. Therefore, emergency measures can be only taken according to previous experience, emergency plan and real-time information at the scene of accident (usually incomplete), and be adjusted according to unceasing improvement of the information in the emergency process.

The application of Markov decision analysis method in the optimized emergency resource scheduling process of sudden public events is shown in Figure 4. The whole decision-making process is how to select a scheme to cope with the uncertainty development state of the sudden public event, until the sudden public event is completely under control.

Basic thought of the Markov process is to infer the future state distribution according to the probability distribution of current state, and make judgment and decisions accordingly.

$X(t)$ is used to express the system state, the state sequence $\{X(t); t \in T\}$ is a stochastic process, $U_{(i)}^m$ is the decision set of the state i at the n th stage. Suppose that P_{ij} is the one-step state transition probability, $f_n(i, \pi_n)$ represents the expected total reward when the system state shifts from $X(n)=i$ at the n th stage to the process end; r_{ij} represents the

corresponding reward when the state shifts from $X(n)=i$ to the next state $X(n+1)=j$, then there is

$$f_n(i,\pi_n)=q(i)+\sum_{j=1}^np_{ij}f_{n+1}(i,\pi_{n+1}),i=1,2,\cdots,m;n=1,2,\cdots$$

(23)

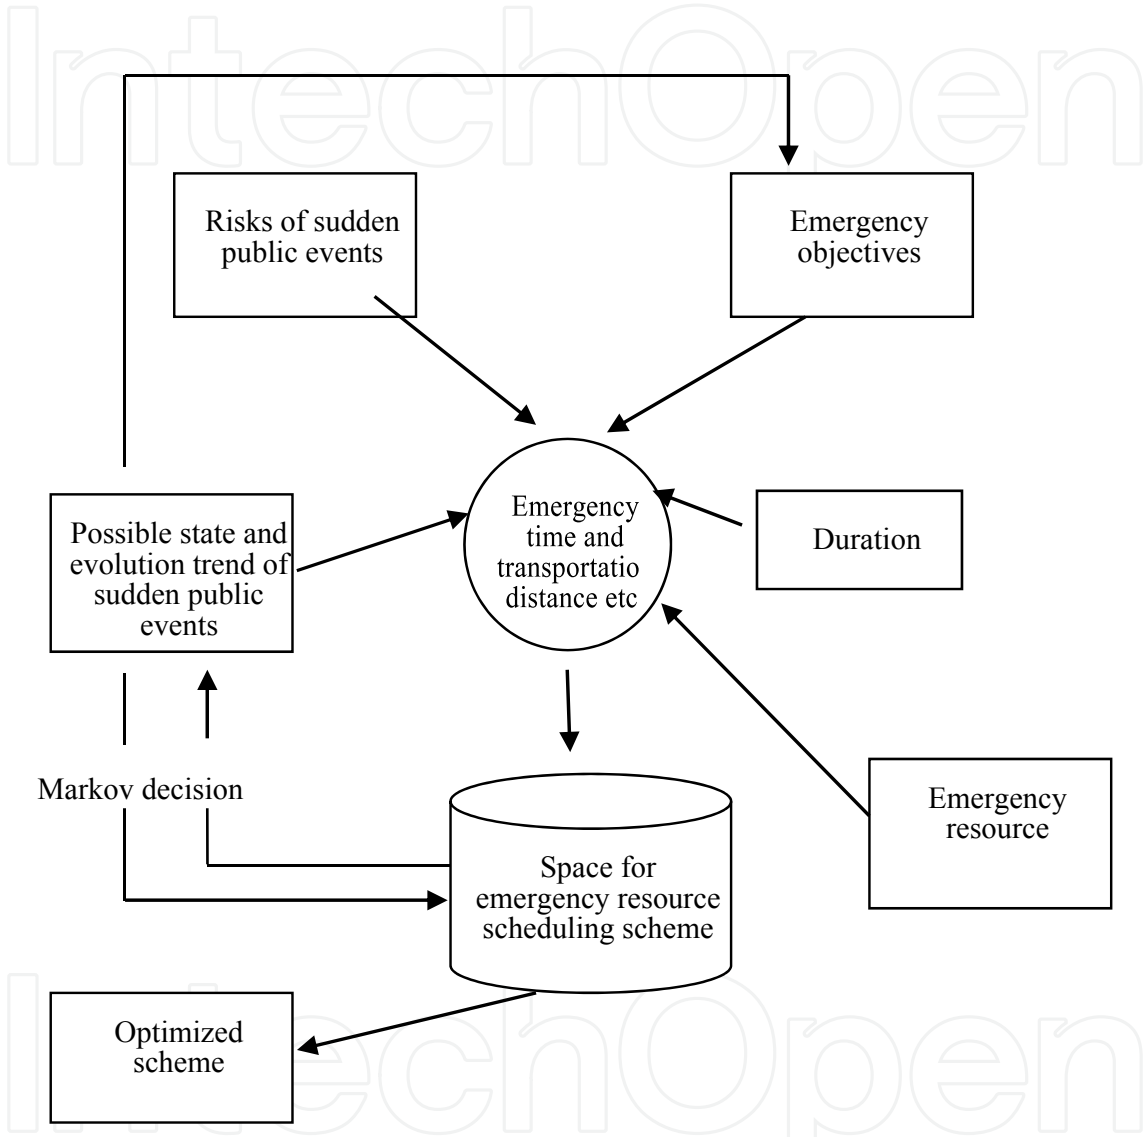


Fig. 4. Diagram of Markov decision processes in the emergency resources scheduling of the sudden public events.

π_n represents the sequence $\{\delta_n,\delta_{n+1},\cdots\}$, $\pi_n=(\delta_n,\pi_{n+1})$ of the decision regulation δ from the n th stage to the process end, where δ_n is the decision regulation at the n th stage.

If $q(i)+\sum_{j=1}^np_{ij}r_{ij},i=1,2,\cdots,m$, $q(i)$ represents the expected reward when the state i shifts once, namely the real-time expected reward of the state, then the above formula can be rewritten as

$$f_n(i, \pi_n) = \sum_{j=1}^n p_{ij} r_{ij} + \sum_{j=1}^n p_{ij} f_{n+1}(i, \pi_{n+1}), i = 1, 2, \dots, m; n = 1, 2, \dots \quad (24)$$

This formula is the basic equation for Markov decision problems.

To research the transient state behavior the ergodic Markov chain, it is necessary to obtain its basic equations set using z transform analysis method. z transform can transform the difference equation to corresponding generalized equation. There is one-to-one correspondence between the function and its z transform, and meanwhile the primary function can be mutually converted with its z transform. Therefore, the following formulae can be obtained through z transform

$$\begin{aligned} nv + f_i &= q_i + \sum_{j=1}^m p_{ij} [(n-1)v + f_j] \quad i = 1, 2, \dots, m \\ nv + f_i &= q_i + \sum_{j=1}^n p_{ij} f_j \quad i = 1, 2, \dots, m \end{aligned} \quad (25)$$

This is the basic equations set for Markov decision problems, which can be obtained through the following algorithms.

- An initial strategy π_n is selected, a decision regulation δ_n is selected for each state $i (i = 1, 2, \dots, m)$, so that its decision $u_{(i)}^k = \delta_n(i)$, and let $n = 0$;
- For the known strategy π_n , let $f_m^{(n)} = 0$, the corresponding strategy profit $v^{(n)}$ and corresponding value $f^{(n)} (i = 1, 2, \dots, m; n = 0, 1, 2, \dots)$ can be obtained through solving the basic equations set for Markov decision problems;
- A new strategy regulation δ_{n+1} is sought using the $f_m^{(n)}$ obtained from the last strategy, so that for each state i ,

$$q_i^{\delta_{n+1}(i)} + \sum_{j=1}^n p_{ij}^{\delta_{n+1}(i)} f_j^{(n)} - f_i \quad (26)$$

achieves its maximal value, and a new strategy π_{n+1} is obtained accordingly;

- If the obtained strategy π_{n+1} is completely equal to the strategy π_n obtained through the last iteration, namely $\pi_{n+1} = \pi_n$, then the iteration is stopped, and the optimized strategy is obtained. Otherwise, return to step 2 and let $n = n+1$.

4. Case study

4.1 Case study – Emergency resources demand prediction using case-based reasoning

The prediction process above can be applied not only in the prediction on emergency resource demand for the public emergencies that have not yet happen, but also in the prediction on emergency resource demand for occurred public emergencies.

Given that the city T plans to conduct a prediction on the demand of emergency resource when the earthquake occurs, and there are four cases for this type of Emergency response in the case library, expressing as $C=(C_1, C_2, C_3, C_4)$, and each case includes the demand information of quantity, quality and type of corresponding emergency resource, as shown in Table 2.

| Case | Emergency resource type | Emergency resource quantity | Emergency resource quality |
|----------------|-------------------------|-----------------------------|----------------------------|
| C ₁ | Tent | 100,000 | Excellent |
| | Clean water | 150,000kg | Excellent |
| | Blood plasma | 2000 ml | Excellent |
| C ₂ | Instant noodle | 140,000 | Excellent |
| | Quilt | 100,000 | Excellent |
| | Cotton dress | 100,000 | Excellent |
| C ₃ | Stretcher | 5000 | Excellent |
| | Tent | 150,000 | Excellent |
| | Food | 200,000 kg | Excellent |
| C ₄ | Cloth | 120,000 | Excellent |
| | Drinking water | 200,000 kg | Excellent |
| | Fresh vegetables | 150,000 kg | Excellent |

Table 2. Simplified Instance of Case Information Library.

Given that the emergency rescue plans for this type of Emergency response are the same. Through the risk analysis, five characteristic factors reflecting the characteristics of Emergency response are selected, meaning that the characteristic factor set B is composed of hazard intensity, disaster-affected population, direct economic losses, stricken area and duration time of disaster, and the membership function of four cases to five characteristic factors is as follows respectively:

$$\begin{aligned}n_{C_1}(b) &= \frac{0.8}{b_1} + \frac{0.7}{b_2} + \frac{0.4}{b_3} + \frac{0.3}{b_4} + \frac{0.6}{b_5} \\n_{C_2}(b) &= \frac{0.6}{b_1} + \frac{0.6}{b_2} + \frac{0.8}{b_3} + \frac{0.9}{b_4} + \frac{0.7}{b_5} \\n_{C_3}(b) &= \frac{0.4}{b_1} + \frac{0.6}{b_2} + \frac{0.8}{b_3} + \frac{0.8}{b_4} + \frac{0.6}{b_5} \\n_{C_4}(b) &= \frac{0.9}{b_1} + \frac{0.8}{b_2} + \frac{0.8}{b_3} + \frac{0.8}{b_4} + \frac{0.7}{b_5}\end{aligned}\tag{27}$$

Given that an Emergency response occurs now, and it needs to conduct a prediction on its emergency resource demands. Given that the emergency resource demand prediction plan for this Emergency response expressed as T, and its membership function can expressed as the formula below:

$$n_T(b) = \frac{0.5}{b_1} + \frac{0.7}{b_2} + \frac{0.7}{b_3} + \frac{0.8}{b_4} + \frac{0.6}{b_5}$$

(28)

It can be calculated that $\bar{n}(b_1)=0.68$, $\bar{n}(b_2)=0.68$, $\bar{n}(b_3)=0.7$, $\bar{n}(b_4)=0.65$ and $\bar{n}(b_5)=0.65$, further it can be obtained that $\delta(b_1)=0.192$, $\delta(b_2)=0.083$, $\delta(b_3)=0.173$, $\delta(b_4)=0.05$ and $\delta(b_5)=0.05$.

Therefore, the weight value of each characteristic factor can be calculated as follows: $w_1=0.35$, $w_2=0.15$, $w_3=0.32$, $w_4=0.09$ and $w_5=0.09$. According to the similarity calculation method, the similarity of each case is calculated as follows: $sim(T, C_1)=0.36$, $sim(T, C_2)=0.66$, $sim(T, C_3)=0.86$ and $sim(T, C_4)=0.66$. All above are shown in Table 2, and the similarity of each case is ordered as follows:

$$sim(T, C_1) < sim(T, C_2) = sim(T, C_4) < sim(T, C_3)$$

(29)

It can be seen from the calculations above that this Emergency response is similar to the case C_3 in the case library, so that the emergency resource demand prediction results of this Emergency response are similar to that of the case C_3 . Consequently, the conclusions of prediction on this emergency resource demand can be drawn by correcting and adjusting the emergency resource demand analysis results of the case C_3 .

| Attribute No. | Weight of each attribute | Case 1 | Case 2 | Case 3 | Case 4 |
|---|--------------------------|-------------|--------|--------|--------|
| Disaster intensity | 0.35 | Extra large | Large | Large | Large |
| Disaster-affected population (10,000 peoples) | 0.15 | 0.8 | 0.5 | 0.4 | 0.6 |
| Direct economic losses (10,000 yuan) | 0.32 | 100 | 11 | 10.6 | 9 |
| Stricken area (km ²) | 0.09 | 5 | 3 | 2 | 2 |
| Duration time of disaster (day) | 0.09 | 10 | 6 | 6 | 5 |
| Similarity with current case | | 0.36 | 0.66 | 0.86 | 0.66 |

Table 3. Characteristic Factor Information of each Case.

4.2 Case study – Application of multi-stage location planning model in optimizing location of emergency resource base stations

In this section, the author makes an optimization of location planning of emergency resource base stations in City T according to the specific circumstances of City T. City T has jurisdiction over 15districts including Heping, Hedong, Nankai, Hexi, Hebei, Hongqiao, Tanggu, Hangu, Dagang, Dongli, Xiqing, Jinnan, Beichen, Wuqing, Baodi, and 3 counties such as Jinghai, Ninghe and Jixian.. The distribution of major districts and counties (the six districts including Heping, Hedong, Nankai, Hexi, Hebei, Hongqiao are called as a unified urban) is shown in Figure 5.

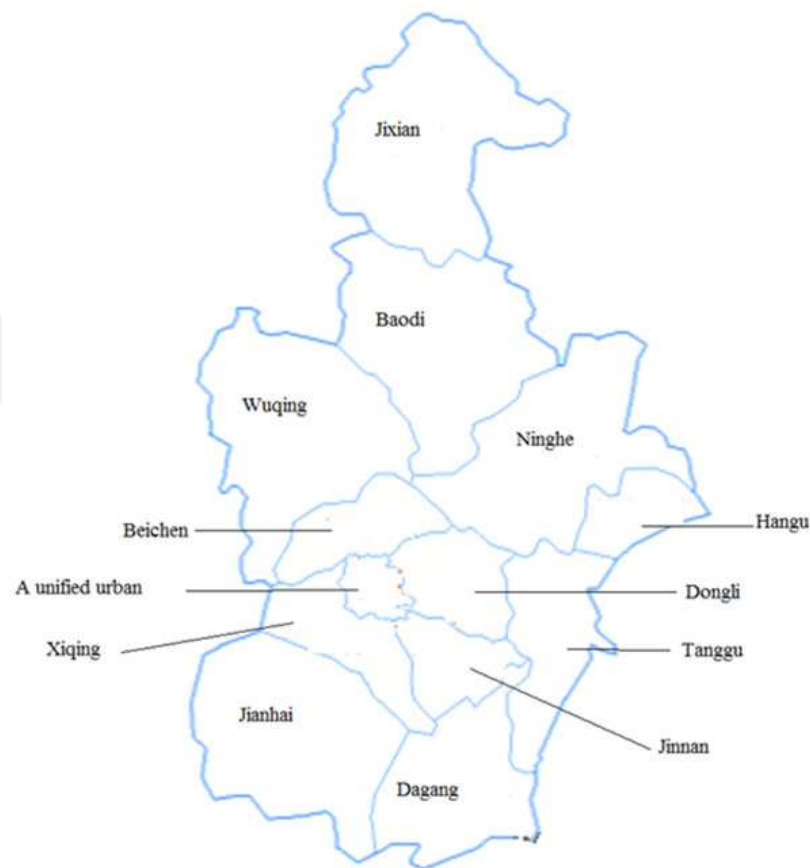


Fig. 5. Administrative Map of City T.

For the sake of computational convenience, and the visual presentation method, in this paper, distances between these administrative districts are presented with straight-line distances, and the central areas of these administrative districts with high concentration of population are determined as the ends of distance calculations, Table 4 shows the straight-line distances between these districts and the population distribution of various administrative districts.

| Distance (km) | Urban district | Tanggu | Hangu | Dagang | Dongli | Xiqing | Jinnan | Beichen | Wuqing | Baodi | Jixian | Ninghe | Jinghai |
|--------------------|----------------|--------|-------|--------|--------|--------|--------|---------|--------|-------|--------|--------|---------|
| Urban district | 0 | 39.3 | 53 | 36.3 | 9.7 | 17.3 | 20.3 | 13.3 | 32.3 | 67 | 104.3 | 57 | 31.7 |
| Tanggu | 39.3 | 0 | 27.7 | 26 | 30 | 56.7 | 23.3 | 49.3 | 65.3 | 81.7 | 115.3 | 36 | 63.3 |
| Hangu | 53 | 27.7 | 0 | 60.7 | 50.7 | 69.3 | 45.7 | 58 | 67.3 | 61 | 95 | 8.7 | 83.3 |
| Dagang | 36.3 | 26 | 60.7 | 0 | 28.7 | 49.3 | 17.3 | 49.3 | 68.3 | 96.7 | 132.7 | 61.3 | 46.7 |
| Dongli | 9.7 | 30 | 46 | 28.7 | 0 | 26.7 | 12 | 21.7 | 40 | 70 | 106.7 | 50.7 | 37.3 |
| Xiqing | 17.3 | 56.7 | 69.3 | 49.3 | 26.7 | 0 | 36 | 13.3 | 26.7 | 68.7 | 106 | 72 | 24 |
| Jinnan | 20.3 | 23.3 | 45.7 | 17.3 | 12 | 36 | 0 | 32.7 | 51.7 | 80 | 116.7 | 52 | 40 |
| Beichen | 13.3 | 49.3 | 58 | 49.3 | 21.7 | 13.3 | 32.7 | 0 | 19.3 | 54 | 94.7 | 60 | 36 |
| Wuqing | 32.3 | 65.3 | 67.3 | 68.3 | 40 | 26.7 | 51.7 | 19.3 | 0 | 44 | 80 | 66.7 | 50 |
| Baodi | 67 | 81.7 | 67.3 | 96.7 | 70 | 68.7 | 80 | 54 | 44 | 0 | 37.3 | 61 | 92.7 |
| Jixian | 104.3 | 115.3 | 95 | 132.7 | 106.7 | 106 | 116.7 | 94.7 | 80 | 37.3 | 0 | 87.3 | 130 |
| Ninghe | 57 | 36 | 8.7 | 61.3 | 50.7 | 72 | 52 | 60 | 66.7 | 61 | 87.3 | 0 | 88 |
| Jinghai | 31.7 | 63.3 | 83.3 | 46.7 | 37.3 | 24 | 40 | 36 | 50 | 92.7 | 130 | 88 | 0 |
| Population (10000) | 389 | 45 | 17 | 32 | 30.4 | 31 | 42 | 34 | 82 | 65 | 78 | 36 | 50 |

Table 4. The straight-line distances between centers of various administrative districts.

The 15 administrative districts are respectively defined in Table 5. To divide the distances by the speed of 80km / h, the travel times are listed in Table 6.

| Urban district | Tanggu | Hangu | Dagang | Dongli | Xiqing | Jinnan | Beichen | Wuqing | Baodi | Jixian | Ninghe | Jinghai |
|----------------|--------|-------|--------|--------|--------|--------|---------|--------|-------|--------|--------|---------|
| A1 | A2 | A3 | A4 | A5 | A6 | A7 | A8 | A9 | A10 | A11 | A12 | A13 |

Table 5. Signs of various administrative districts.

| Time (min) | Urban | Tanggu | Hangu | Dagang | Dongli | Xiqing | Jinnan | Beichen | Wuqing | Baodi | Jixian | Ninghe | Jinghai |
|------------|-------|--------|-------|--------|--------|--------|--------|---------|--------|-------|--------|--------|---------|
| Urban | 0 | 29.48 | 39.75 | 27.23 | 7.28 | 12.98 | 15.23 | 9.98 | 24.23 | 50.25 | 78.23 | 42.75 | 23.78 |
| Tanggu | 29.48 | 0 | 20.78 | 19.50 | 22.50 | 42.53 | 17.48 | 36.98 | 48.98 | 61.28 | 86.48 | 27.00 | 47.48 |
| Hangu | 39.75 | 20.78 | 0 | 45.53 | 38.03 | 51.98 | 34.28 | 43.50 | 50.48 | 45.75 | 71.25 | 6.53 | 62.48 |
| Dagang | 27.23 | 19.50 | 45.53 | 0 | 21.53 | 36.98 | 12.98 | 36.98 | 51.23 | 72.53 | 99.53 | 45.98 | 35.03 |
| Dongli | 7.28 | 22.50 | 34.50 | 21.53 | 0 | 20.03 | 9.00 | 16.28 | 30.00 | 52.50 | 80.03 | 38.03 | 27.98 |
| Xiqing | 12.98 | 42.53 | 51.98 | 36.98 | 20.03 | 0 | 27.00 | 9.98 | 20.03 | 51.53 | 79.50 | 54.00 | 18.00 |
| Jinnan | 15.23 | 17.48 | 34.28 | 12.98 | 9.00 | 27.00 | 0 | 24.53 | 38.78 | 60.00 | 87.53 | 39.00 | 30.00 |
| Beichen | 9.98 | 36.98 | 43.50 | 36.98 | 16.28 | 9.98 | 24.53 | 0 | 14.48 | 40.50 | 71.03 | 45.00 | 27.00 |
| Wuqing | 24.23 | 48.98 | 50.48 | 51.23 | 30.00 | 20.03 | 38.78 | 14.48 | 0 | 33.00 | 60.00 | 50.03 | 37.50 |
| Baodi | 50.25 | 61.28 | 50.48 | 72.53 | 52.50 | 51.53 | 60.00 | 40.50 | 33.00 | 0 | 27.98 | 45.75 | 69.53 |
| Jixian | 78.23 | 86.48 | 71.25 | 99.53 | 80.03 | 79.50 | 87.53 | 71.03 | 60.00 | 27.98 | 0 | 65.48 | 97.50 |
| Ninghe | 42.75 | 27.00 | 6.53 | 45.98 | 38.03 | 54.00 | 39.00 | 45.00 | 50.03 | 45.75 | 65.48 | 0 | 66.00 |
| Jinghai | 23.78 | 47.48 | 62.48 | 35.03 | 27.98 | 18.00 | 30.00 | 27.00 | 37.50 | 69.53 | 97.50 | 66.00 | 0 |

Table 6. The travel times between centers of various administrative districts.

Table 7-9 show the minimum numbers of emergency resource base stations covering all the administrative districts and specific sites, in the case of that emergency response time standards are 30min, 45min and 60min respectively.

1. When the emergency response time standard is set as 30min

| District | Districts within a 30-min drive |
|----------|---------------------------------|
| A1 | A2,A4,A5,A6,A7,A8,A9,A13 |
| A2 | A1,A3,A4,A5,A7,A12 |
| A3 | A2,A12 |
| A4 | A1,A2,A5,A7 |
| A5 | A1,A2,A4,A6,A7,A8,A9,A13 |
| A6 | A1,A5,A7,A8,A9,A13 |
| A7 | A1,A2,A4,A5,A6,A8,A13 |
| A8 | A1,A5,A6,A7,A9,A13 |
| A9 | A1,A5,A6,A8, |
| A10 | A11 |
| A11 | A10 |
| A12 | A2,A3 |

Table 7. The coverage for different administrative districts in T=30min.

Using WinQSB to find the solution of set covering model, the optimal solution of $z = 4$ is obtained, that is, to cover all demand sites, four emergency resource base stations are

necessary. Then using MCLP model, and having the p-value increase continuously from 1 to 4, using WinQSB, solution of the model can be obtained as follows:

When $p = 1$, the solution is: $A_5 = 1, Y_1 = Y_2 = Y_4 = Y_6 = Y_7 = Y_8 = Y_9 = Y_{13} = 1, z = 705$, it means that if an emergency resource base station is built in the Dongli District, it can cover the urban district, Tanggu, Dagang, Xiqing, Jinnan, Beichen, Wuqing and Jinghai in 30 minutes, the total number of the population in these districts is 7.05 million.

When $p = 2$, the solution is: $A_1 = A_2 = 1, Y_1 = Y_2 = Y_3 = Y_4 = Y_5 = Y_6 = Y_7 = Y_8 = Y_9 = Y_{12} = Y_{13} = 1, z = 788.4$, it means that if two emergency resource base stations are built in the urban district and Tanggu respectively, they can cover the urban district, Tanggu, Hangu, Dagang,Dongli, Xiqing, Jinnan, Beichen, Wuqing, Ninghe and Jinghai in 30 minutes, the total number of the population in these districts is 7.884 million.

When $p = 3$, the solution is $A_1 = A_2 = A_{10} = 1, Y_1 = Y_2 = Y_3 = Y_4 = Y_5 = Y_6 = Y_7 = Y_8 = Y_9 = Y_{11} = Y_{12} = Y_{13} = 1, z = 866.4$, it means that if two emergency resource base stations are built in the urban district, Tanggu and Baidi respectively, they can cover the urban district, Tanggu, Hangu, Dagang, Dongli, Xiqing, Jinnan, Beichen, Wuqing, Jixian County, Ninghe and Jinghai in 30 minutes, the total number of the population in these districts is 8.664 million.

When $p = 4$, the solution is $A_2 = A_5 = A_{10} = A_{11} = 1, Y_1 = Y_2 = Y_3 = Y_4 = Y_5 = Y_6 = Y_7 = Y_8 = Y_9 = Y_{10} = Y_{11} = Y_{12} = Y_{13} = 1, z = 931.4$, it means that if four emergency resource base stations are built in Tanggu,Dongli, Baidi and Jixian County respectively, they can cover all administrative districts in 30min, the total number of the population in these districts is 9.314 million.

2. When the emergency response time standard is set as 45min

| District | Districts within a 45-min drive |
|----------|-------------------------------------|
| A1 | A2,A3,A4,A5,A6,A7,A8,A9,A12,A13 |
| A2 | A1,A3,A4,A5,A6,A7,A8,A12 |
| A3 | A1,A2,A5,A7,A8,A12 |
| A4 | A1,A2,A5,A6,A7,A8,A13 |
| A5 | A1,A2,A3,A4,A6,A7,A8,A9,A12,A13 |
| A6 | A1,A2,A4,A5,A7,A8,A9,A13 |
| A7 | A1,A2,A3,A4,A5,A6,A8,A9,A12,A13 |
| A8 | A1,A2,A3,A4,A5,A6,A7,A9,A10,A12,A13 |
| A9 | A1,A5,A6,A7,A8,A10,A13 |
| A10 | A8,A9,A11,A13 |
| A11 | A10 |
| A12 | A1,A2,A3,A5,A7,A8 |

Table 8. The coverage for different administrative districts in T=45min.

Through the same calculation process as above, the optimal solution of $z = 2$ is obtained, that is, to cover all demand sites, two emergency resource base stations are necessary. Then using MCLP model and having the p-value increase continuously from 1 to 2, using WinQSB, solution of the model can be obtained as follows:

When $p = 1$, the solution is $A_8 = 1$, $Y_1 = Y_2 = Y_3 = Y_4 = Y_5 = Y_6 = Y_7 = Y_9 = Y_{10} = Y_{12} = Y_{13} = 1$, $z = 819.4$, it means that if a emergency resource base station is build in Beichen, it can cover the urban district, Tanggu, Hangu and Dagang, Dongli, Xiqing, Jinnan, Wuqing, Baodi, Ninghe and Jinghai within 45min, the total number of the population in these districts is 8.194 million.

When $p = 2$, the solution is $A_8 = A_{10} = 1$, $Y_1 = Y_2 = Y_3 = Y_4 = Y_5 = Y_6 = Y_7 = Y_8 = Y_9 = Y_{10} = Y_{11} = Y_{12} = Y_{13} = 1$, $z = 931.4$, it means that if two emergency resource base stations are built in Beichen and Baodi respectively, they can cover all the administrative regions in 45-min, the total number of the population in these districts is 9.314 million.

3. When the emergency response time standard is set as 60 min

| District | Districts within a 60-min drive |
|----------|---|
| A1 | A2,A3,A4,A5,A6,A7,A8,A9,A10,A12,A13 |
| A2 | A1,A3,A4,A5,A6,A7,A8,A9,A12,A13 |
| A3 | A1,A2,A4,A5,A6,A7,A8,A9,A10,A12 |
| A4 | A1,A2,A3,A5,A6,A7,A8,A9,A12,A13 |
| A5 | A1,A2,A3,A4,A6,A7,A8,A9,A10,A12,A13 |
| A6 | A1,A2,A3,A4,A5,A7,A8,A9,A10,A12,A13 |
| A7 | A1,A2,A3,A4,A5,A6,A8,A9,A10,A12,A13 |
| A8 | A1,A2,A3,A4,A5,A6,A7,A9,A10,A12,A13 |
| A9 | A1,A2,A3,A4,A5,A6,A7,A8,A10,A11,A12,A13 |
| A10 | A1,A3,A5,A6,A7,A8,A9,A11,A12 |
| A11 | A9,A10 |
| A12 | A1,A2,A3,A4,A5,A6,A7,A8,A9,A10 |

Table 9. The coverage for different administrative districts in T=60min.

Through the same calculation process as above, the optimal solution of $z = 2$ is obtained, that is, to cover all demand sites, two emergency resource base stations are necessary. Then using MCLP model and having the p -value increase continuously from 1 to 2, using WinQSB, solution of the model can be obtained as follows:

When $p = 1$, the solution is $A_9 = 1$, $Y_1 = Y_2 = Y_3 = Y_4 = Y_5 = Y_6 = Y_7 = Y_8 = Y_{10} = Y_{11} = Y_{12} = Y_{13} = 1$, $z = 849.4$, it means that if a emergency resource base station is build in Wuqing, it can cover the urban district, Tanggu, Hangu, Dagang, Dongli, Xiqing, Jinnan, Beichen, Baodi, Jixian County, Ninghe and Jinghai within 60min, the total number of the population in these districts is 8.494 million.

When $p = 2$, the solution is $A_2 = A_9 = 1$, $Y_1 = Y_2 = Y_3 = Y_4 = Y_5 = Y_6 = Y_7 = Y_8 = Y_9 = Y_{10} = Y_{11} = Y_{12} = Y_{13} = 1$, $z = 931.4$, it means that if two emergency resource base stations are built in Tanggu and Wuqing respectively, they can cover all the administrative regions in 60 min, the total number of the population in these districts is 9.314 million.

4. Analysis of the result

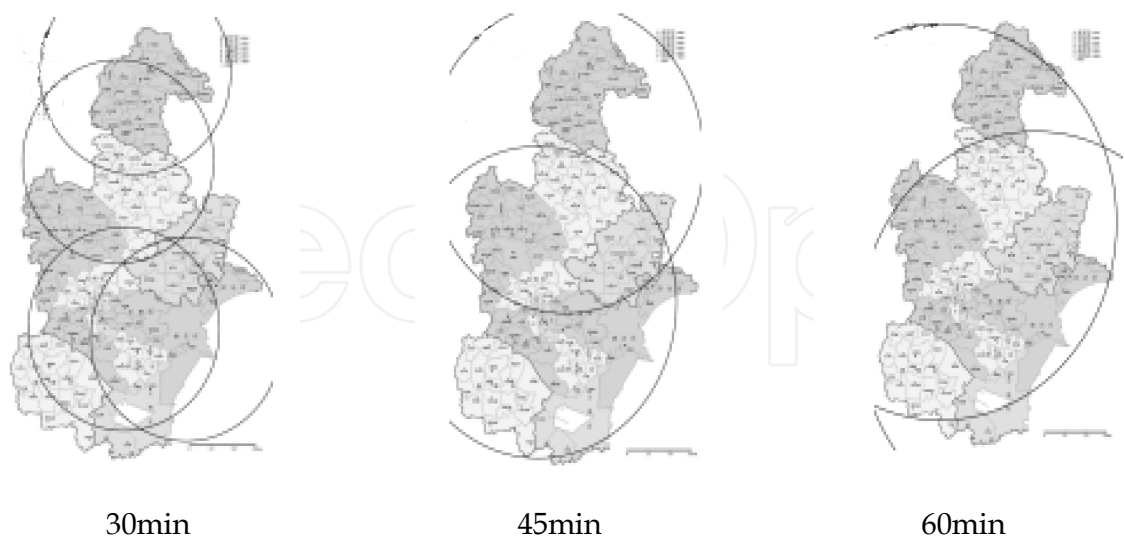


Fig. 6. Results Map of City T.

Comparing the above results under the three emergency response time standards, we can find that:

1. Though the solutions of set covering model and maximum coverage model, it is found that within the area of a 30-min drive (response time standard) , four emergency resource base stations are the most reasonable and can meet the demand, and when the number of base stations is less than 4, the emergency demand can not be met, and when the number is more than 4, unnecessary waste and redundant coverage will be made, and through MCLP model, the construction site of the four base stations can be determined as Tanggu, Dongli, Baodi and Jixian.
2. When the emergency response time standards are set as 45min and 60min, the result shows a maximum of two emergency resources is enough to cover all administrative regions of City T, but for different time standards, the base stations should be built in different districts, when the time standard is 45min, they should be built in Beichen and Baodi, and when the time standard is 60min, they should be built in Tanggu and Wuqing.
3. Because this result is obtained through simplifying the actual problems appropriately, can provide a reference for the actual decision-making, but there may be some errors, so the research of planning method more precise and close to the actual is required.

4.3 Case study – Appropriate allocation of emergency resources

It is supposed that there are 4 dangerous emergency zones in the emergency process, namely $N = 4$; total available amount of emergency resources is 12, namely $X = 12$, and X represents the total amount of available resources. Risk value when each scene is allocated with different amounts of emergency resources is listed in Table 10.

Emergency resources are dispatched according to the emergency resource allocation model, so as to achieve the optimization objective of minimizing the sum of risk values at various emergency zones in the following processing steps:

- 1. Suppose that the emergency response process can be divided into 4 stages, namely 4 emergency zones, i.e. $k = 1, 2, 3, 4$;
- 2. The emergency resource allocation objective at each stage is L_k , and the total emergency objective is expressed as formula (7) when the emergency stage reaches $k + 1$;
- 3. There is only one state variable $x(k)$ in the example, and $\sum_{k=1}^N x(k) = 12$;

| Emergency resource amount | Risk value of zones | | | |
|---------------------------|---------------------|----|----|----|
| | A | B | C | D |
| 2 | 20 | 31 | 27 | 38 |
| 3 | 16 | 26 | 25 | 35 |
| 4 | 11 | 21 | 23 | 33 |

Table 10. Emergency resource amount and the risk value of zones.

- 4. Suppose that in the available allocation scheme, the emergency resource amount provided for each emergency zone changes from 2 to 4, namely $2 \leq u_k \leq 4$;
- 5. In that case, formula $x(k + 1) = f(x(k), u(k), w(k))$ can be written as $x_{k+1} = u_k + x_k$;
- 6. Parameters are substituted into formula (8) to obtain

$$\begin{cases} J_{k+1}(x_{k+1}) = \min_{2 \leq u_k \leq 4} \sum_{k=1}^{N-1} L_k = \\ \min_{2 \leq u_k \leq 4} (L_{k+1}(x_{k+1}, u_{k+1}, w_{k+1}) + J_k(x_k)) \\ J_0(x_1) = 0 \end{cases}$$

The optimized emergency resource allocation is calculated under the supposed scene of accidents with the mathematical mode of optimized emergency resource allocation, so as to obtain the optimized allocation result.

For the risk zone A, alternative resource allocation decision is 2-4, corresponding total risk value is from 20 to 11, so risks can be minimized to 11 with the decision 4 in the risk zone A (Table 11). The optimized decision scheme of zones B, C and D can be obtained with the same method (Table 12-14). Under 4 dangerous scenes, optimized allocation of limited resources is 4 in zone A, 4 in zone B, 2 in zone C and 2 in zone D, thus the total risk value is reduced to 97.

| x_1 | Corresponding risk value of zone A at the first stage of the resource allocation strategy u_1 | | | $\min \sum L_1$ |
|-------|---|------|------|-----------------|
| | 2 | 3 | 4 | |
| 2 | 20+0 | - | - | 20 |
| 3 | 20+0 | 16+0 | - | 16 |
| 4 | 20+0 | 16+0 | 11+0 | 11 |

Note: x_1 is the corresponding amount of resource demand under each resource allocation decision at the first stage; $\min \sum L_1$ is the minimum risk value corresponding to different decisions at the first stage.

Table 11. Resource allocation strategies and corresponding risk value of zone A (the first stage).

| x_2 | Corresponding risk value of zone B at the second stage of the resource allocation strategy u_2 | | | $\min \sum L_2$ |
|-------|--|---------|-------|-----------------|
| | 2 | 3 | 4 | |
| 4 | 31+20 | - | - | 51 |
| 5 | 31+16 | 26 + 20 | - | 46 |
| 6 | 31+11 | 26 + 16 | 21+20 | 42 |
| 7 | 31+11 | 26 + 11 | 21+16 | 37 |
| 8 | 31+11 | 26+ 11 | 21+11 | 32 |

Note: x_2 is the corresponding amount of resource demand under each resource allocation decision at the second stage; $\min \sum L_2$ is the minimum risk value corresponding to different decisions at the second stage.

Table 12. Resource allocation strategies and corresponding risk value of zone B (the second stage).

| x_3 | Corresponding risk value of zone C at the third stage of the resource allocation strategy u_3 | | | $\min \sum L_3$ |
|-------|---|---------|---------|-----------------|
| | 2 | 3 | 4 | |
| 8 | 27 + 42 | 25 + 46 | 23 + 51 | 69 |
| 9 | 27 + 37 | 25 + 42 | 23+46 | 64 |
| 10 | 27 + 32 | 25 + 37 | 23+42 | 59 |

Note: x_3 is the corresponding amount of resource demand under each resource allocation decision at the third stage; $\min \sum L_3$ is the minimum risk value corresponding to different decisions at the third stage.

Table 13. Resource allocation strategies and corresponding risk value of zone C (the third stage).

| x_4 | Corresponding risk value of zone D at the fourth stage of the resource allocation strategy u_4 | | | $\min \sum L_4$ |
|-------|--|---------|---------|-----------------|
| | 2 | 3 | 4 | |
| 12 | 38 + 59 | 35 + 64 | 33 + 69 | 97 |

Note: x_4 is the corresponding amount of resource demand under each resource allocation decision at the fourth stage; $\min \sum L_4$ is the minimum risk value corresponding to different decisions at the fourth stage.

Table 14. Resource allocation strategies and corresponding risk value of zone D (the fourth stage).

4.4 Case study – Optimal dispatching of emergency resources

In order to validate the dynamic optimization process of emergency resource scheduling of sudden public events with the Markov decision process, here the rationality and practicability of dynamic optimization method of emergency resource scheduling based on the Markov decision process is proved through analysis and explanation by examples.

Now it is supposed that an earthquake disaster takes place in a city, which is likely to cause two secondary disasters S_1 and S_2 , namely the state space of this earthquake disaster is $S = \{S_1, S_2\}$. where, S_1 and S_2 represent the initial event S , namely secondary accidents are likely to be obtained from evolution of the earthquake disasters.

Then it is supposed that only one emergency resource R is required in emergency of this sudden public event, and the emergency time standard T is 2 time units. So long as enough amounts of emergency resources is transported to sudden public event sites within the standard time under the state of an event, then the sudden public event can be under control. If the amount of resource R transported to the scene of accident is insufficient, then the sudden public event can only be partially controlled (expressed as the availability of the emergency resources a), and the range of values of a is 0%~100%. It is also supposed that the relationship between the demand and the availability of the emergency resource R is shown in Table 15.

| State S | Demand of the emergency resource R | Availability $a/\%$ |
|-----------|--------------------------------------|---------------------|
| S_1 | 120 | 100 |
| | 80 | 80 |
| | 200 | 100 |
| S_2 | 120 | 80 |
| | 80 | 40 |

Table 15. Relationship between the demand and the availability of the resources under different states of S .

It is supposed that 4 emergency resource sites around the sudden public events can cover this event site in 2 time units, as shown in Figure 7. As can be seen from the Figure 7, only the site A is in 1 time unit, while the site B is in the space of 1.5 time units, and both the site C and site D are in 2 time units. The amount of stored emergency resources at each site is also shown in the Figure 7.

Now it is stipulated that the emergency satisfaction is defined as the emergency success. Under the circumstances, the emergency resource site A is closest to the scene of accident X , therefore it is necessary to choose the site A, so as to satisfy the shortest emergency time. When the accident is under the state of S_1 , 80 units of emergency resource R are transported from the emergency resource site A to the event site X , so the availability of the resources is only 80% under the state of S_1 , which is unable to completely satisfy the emergency demand. Under the circumstances, it is necessary to be supported by the sites B, C and D. When the sudden public event is under the state of S_1 , 40 units of emergency resources can be transported from the emergency resource sites B, C and D to the site X , so that the total

accumulated amount achieves 120 units, and the amount of resources achieves the availability of 100%; but it is necessary to transport 120 units of resources from the sites B, C and D to the site X under the state of S_2 , so that the total accumulated amount achieves 200 units, and the availability achieves 100%.

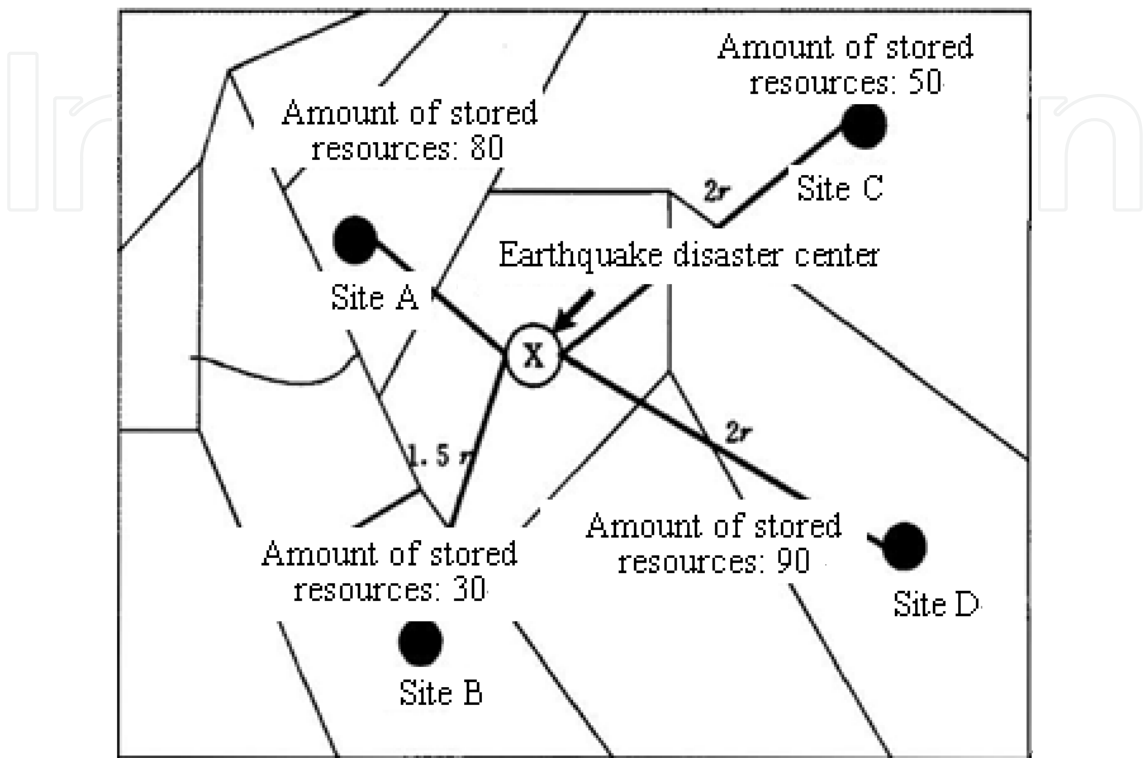


Fig. 7. Distribution map of the emergency resources sites.

Therefore, the state space in this example is $S = \{S_1, S_2\}$, the decision space can be expressed as the scheduling scheme, and the reward can be expressed as the cost or scheduling duration, as shown in Table 16.

| | | | Site A | Site B | Site C | Site D | Total | Availability |
|---|------------|-------------------------|--------|--------|--------|--------|-------|--------------|
| Amount of stored emergency resources at each site | | | 80 | 30 | 50 | 90 | 250 | |
| State S_1 | Scheme I | Transportation quantity | 80 | 30 | 0 | 10 | 120 | 100% |
| | | Cost | 10 | 30 | 0 | 30 | 70 | |
| | Scheme II | Transportation quantity | 80 | 30 | 10 | 0 | 120 | 100% |
| | | Cost | 10 | 30 | 20 | 0 | 60 | |
| State S_2 | Scheme III | Transportation quantity | 80 | 30 | 20 | 70 | 200 | 100% |
| | | Cost | 10 | 30 | 40 | 150 | 230 | |
| | Scheme IV | Transportation quantity | 80 | 30 | 50 | 40 | 200 | 100% |
| | | Cost | 10 | 30 | 80 | 100 | 220 | |

Table 16. Statistical table of the transportation quantity and cost.

The state transition probability of sudden public events can be obtained using the Domino effect analysis method, as shown in Table 17. This process is complex, so it is unnecessary to go into details in this section.

| State i | Decision | Transition probability | | Reward | | Expected timely reward |
|-----------|-------------------------|------------------------|----------------------|----------------------|----------------------|------------------------|
| | $V_{(i)}^K = \delta(i)$ | $p_{i1}^{\delta(i)}$ | $p_{i2}^{\delta(i)}$ | $r_{i1}^{\delta(i)}$ | $r_{i2}^{\delta(i)}$ | $q_i^{\delta(i)}$ |
| S_1 | Scheme I | 0.3 | 0.7 | -10 | -3 | -5.1 |
| | Scheme II | 0.8 | 0.2 | -12 | -11 | -11.8 |
| S_2 | Scheme III | 0.6 | 0.4 | -9 | -8 | -8.6 |
| | Scheme IV | 0.5 | 0.5 | -4 | -5 | -4.5 |

Note: The reward uses emergency consumption time, and is negative as a consequence.

Table 17. The transition probability and reward.

The solution process is as follows:

There are two states in this case, and two decisions under each state, namely the scheduling schemes. $u_{(1)}^1$ represents selecting the scheduling scheme I when the event is under the state of S_1 ; $u_{(1)}^2$ represents selecting the scheduling scheme II when the event is under the state of S_2 ; $u_{(2)}^1$ represents selecting the scheduling scheme III when the event is under the state of S_2 ; $u_{(2)}^2$ represents selecting the scheduling scheme IV when the event is under the state of S_2 .

Expected timely reward: $q_1^1 = \sum_{j=1}^m p_{ij}r_{ij} = 0.3 \times (-10) + 0.7 \times (-3) = -5.1$, likewise $q_1^2 = -11.8$, $q_2^1 = -8.6$, $q_2^2 = -4.5$.

In the first step, select the initial strategy π_0 ; let $\delta_0(1) = u_{(1)}^1$, $\delta_0(2) = u_{(2)}^1$, that is, select the scheduling scheme I under the state of S_1 , and select the scheduling scheme II under the state of S_2 , then there is $P = \begin{bmatrix} 0.3 & 0.7 \\ 0.6 & 0.4 \end{bmatrix}$, $Q = \begin{bmatrix} -5.1 \\ -8.6 \end{bmatrix}$.

In the second step, calculate the fixed value, and estimate the initial strategy

$$\begin{cases} v+f_1=-5.1+0.3f_1+0.7f_2 \\ v+f_2=-8.6+0.6f_1+0.4f_2 \end{cases},$$

let $f_2 = 0$, $v^{(0)} = -6.99$, $f_1^{(0)} = 2.69$, $f_2^{(0)} = 0$ is obtained through solving the equations set.

The third step is the strategy improvement program, in which the improvement strategy π_1 is obtained.

For the state S_1 , select a strategy $u_1^{(k)}$, so as to maximize $q_1^k + p_{11}^k f_1^{(0)} + p_{12}^k f_1^{(0)}$, that is

$$\begin{cases} -5.1+0.3 \times 2.69+0.7 \times 0-2.69=-6.99 \\ -11.8+0.8 \times 2.69+0.2 \times 0-2.69=-12.388 \end{cases}$$

Select the strategy $u_{(1)}^1$. Scheme I is used for emergency resource scheduling under the state of S_1 .

For the state S_2 , select a strategy $u_2^{(k)}$, so as to maximize $q_2^k + p_{21}^k f_1^{(0)} + p_{22}^k f_2^{(0)}$, that is

$$\begin{cases} -8.6+0.6 \times 2.69+0.4 \times 0-0=-6.99 \\ -4.5+0.5 \times 2.69+0.5 \times 0=-3.15 \end{cases}$$

Select the strategy $u_{(2)}^2$. Scheme IV is used for emergency resource scheduling under the state of S_2 .

The improvement strategy is obtained as $\delta_1(1)=u_{(1)}^1$, $\delta_1(2)=u_{(2)}^2$ from the above computing results. The strategy π_1 is different from π_0 , so no optimized strategy is obtained and it is necessary to go on iteration.

The fourth step is fixed value operation for the purpose of obtaining $v^{(1)}$, $f_1^{(1)}$, $f_2^{(1)}$

$$\begin{cases} v^{(1)}+f_1^{(1)}=-5.1+0.3f_1^{(1)}+0.7f_2^{(1)} \\ v^{(1)}+f_2^{(1)}=-4.5+0.5f_1^{(1)}+0.5f_2^{(1)} \end{cases}$$

Let $f_2^{(1)}=0$, then $v^{(1)}=-4.75$, $f_1^{(1)}=-0.5$, $f_2^{(1)}=0$ is obtained through solving the equations set.

In the fifth step, seek the improvement strategy π_2 .

For the state S_1 , there is

$$\begin{cases} -5.1+0.3 \times (-0.5)+0.7 \times 0+0.5=-4.75 \\ -11.8+0.8 \times (-0.5)+0.2 \times 0+0.5=-11.7 \end{cases}$$

So the strategy $u_{(1)}^1$ is still taken.

For the state S_2 , there is

$$\begin{cases} -8.6+0.6 \times (-0.5)+0.4 \times 0-0=-8.9 \\ -4.5+0.5 \times (-0.5)+0.5 \times 0-0=-4.75 \end{cases}$$

So the strategy $u_{(2)}^2$ is still taken.

As a result, $\delta_1(1)=u_{(1)}^1$, $\delta_1(2)=u_{(2)}^2$ is obtained, which is exactly the same as the previous iteration results, so the optimized strategy is obtained as π_1 . That is, take the scheduling scheme I when the sudden event is under the state of S_1 , and take the scheduling scheme IV when the sudden event is under the state of S_2 .

5. Conclusion and future researches

When we design an emergency rescue system, we need to coordinate the manpower with the financial, material resources. It is a complicated process to optimally allocate various elements within a system. It involves a wide range of contents. Repeated researches should be made on several theories and methods. Designing of an emergency rescue system covers the following four aspects which have been cross-linked each other essentially, that are 1) Demand Forecasting of Emergency Resources; 2) Optimal Site Selection for the Base Station of Emergency Resources; 3) Appropriate Allocation of Emergency Resources; 4) Optimal Dispatching of Emergency Resources. Here, it proposed the overall and detailed methods to fulfill these four aspects.

In the future it is necessary to develop a computer system, so that these methods can adapt to the dynamic optimization process of emergency resource scheduling scheme under complex conditions such as many times of derivation and many kinds of resources etc., and it can more greatly satisfy the actual need.

6. Acknowledgments

The authors appreciate the support of No.47 China's Postdoc Foundation(NO:20100470305) and the national science foundation for the youth (NO:41105099).

7. References

- [1] Clancey, W.J., (1985). Heuristic Classification. *Artificial Intelligence*, 27: pp289-350.
- [2] Bachant, J., & McDermott, J., (1984). R1 Revisited: Four years in the Trenches. *The AI Magazine*, 5(iii).
- [3] Coenen, F. & Bench-Capon, T.J.M. (1992). Maintenance and Maintainability in Regulation Based Systems. *ICL Technical Journal*, May 1992, pp.76-84.
- [4] Watson, I.D., Basden, A. & Brandon, P.S. (1992a). The Client Centered Approach: Expert System Development. *Expert Systems* 9(iv): pp.181-88.
- [5] Watson, I.D., Basden, A. & Brandon, P.S. (1992b). The Client Centered Approach: Expert System Maintenance. *Expert Systems* 9(iv): pp189-96..
- [6] Watson, I.D., & Abdullah, S. (1994). Developing Case-Based Reasoning Systems: A Case Study in Diagnosing Building Defects. In, *Proc. IEE Colloquium on Case-Based Reasoning: Prospects for Applications*, Digest No: 1994/057, pp.1/1-1/3.
- [7] Schank, R.C. & Abelson, R.P. (1977). *Scripts, Plans, Goals and Understanding*. Erlbaum, Hillsdale, New Jersey, US.
- [8] Schank, R. (1982). *Dynamic memory: a theory of reminding and learning in computers and people*. Cambridge University Press, Cambridge, UK.
- [9] Kolodner, J. L. (1983a). Maintaining Organization in a Dynamic Long-Term Memory. *Cognitive Science*, 7(iv): pp.243-80.
- [10] Kolodner, J. L. (1983b). Reconstructive Memory: A Computer Model. *Cognitive Science*, 7(iv): pp.281-28.
- [11] Kolodner, J. L. (1993). *Case-Based Reasoning*. Morgan Kaufmann.

- [12] Porter, B.W. & Bareiss, E.R. (1986). PROTON: An experiment in knowledge acquisition for heuristic classification tasks. In *Proceedings of the First International Meeting on Advances in Learning (IMAL)*, Les Arcs, France, pp.159-74.
- [13] Bareiss, E. R.,(1988). *PROTON: A Unified Approach to Concept Representation, Classification, and learning*. Ph.D. thesis, Department. of Computer Science, University of Texas.
- [14] Ashley, K.D. (1988). Arguing by Analogy in Law: A Case-Based Model. In D.H. Helman (Ed.), *Analogical Reasoning: Perspectives of Artificial Intelligence, Cognitive Science, and Philosophy*. D. Reidel.
- [15] Rissland, E.L., & Skala , D.B. (1989). Combining case-based and rule-based reasoning: A heuristic approach. In, *Eleventh International Joint Conference on Artificial Intelligence, IJCAI-89*: pp. 524-30, Detroit, Michigan.
- [16] Sharma, S. & Sleeman, D. (1988). REFINER: A Case-Based Differential Diagnosis Aide for Knowledge Acquisition and Knowledge Refinement. In, *EWSL 88; Proc. European Working Session on Learning*: pp201-10.
- [17] Keane, M., (1988). Where's the Beef? The absence of pragmatic factors in theories of analogy. In, *ECAI-88*: pp.327-32.
- [18] Althoff, K.D. (1989). Knowledge acquisition in the domain of CBC machine centres: the MOLTKE approach. In, *EKAU-89, Third European Workshop on Knowledge-Based Systems*, Boos, J., Gaines, B. & Ganascia, J.G. (eds.), pp.180-95. Paris, July 1989.
- [19] Richter, A.M. & Weiss, S. (1991). Similarity, uncertainty and case-based reasoning in PATDEX. In, *Automated reasoning, essays in honor of Woody Bledsoe*. Kluwer R.S. Boyer (ed.): pp249-265.
- [20] Aamodt, A., (1989). Towards robust expert systems that learn from experience - an architectural framework. In, *EKAU-89: Third European Knowledge Acquisition for Knowledge-Based Systems Workshop*, Boose, J., Gaines, B. & Ganascia J.-G. (eds.), pp.311-326. Paris, July 1989.
- [21] Aamodt, A. (1991). A Knowledge intensive approach to problem solving and sustained learning, PhD. dissertation, University of Trondheim, Norwegian Institute of Technology, May 1991. University Microfilms PUB 92-08460.
- [22] Watson, I.D., & Abdullah, S. (1994). Developing Case-Based Reasoning Systems: A Case Study in Diagnosing Building Defects. In, *Proc. IEE Colloquium on Case-Based Reasoning: Prospects for Applications*, Digest No: 1994/057, pp.1/1-1/3.
- [23] Yang, S., & Robertson, D. (1994). A case-based reasoning system for regulatory information. In, *Proc. IEE Colloquium on Case-Based Reasoning: Prospects for Applications*, Digest No: 1994/057, pp.3/1-3/3.
- [24] Moore, C.J., Lehane, M.S. & Proce, C.J. (1994). Case-Based Reasoning for Decision Support in Engineering Design. In, *Proc. IEE Colloquium on Case-Based Reasoning: Prospects for Applications*, Digest No: 1994/057, pp.4/1-4/4.
- [25] Oxman, R.E., (1993a). PRECEDENTS: Memory structure in design case libraries. In *CAAD Futures 93*, Elsevier Science Publishers.

- [26] Oxman, R.E., (1993b). Case-based design support: Supporting architectural composition through precedent libraries. *Journal of Architectural Planning Research*.
- [27] Venkatamaran, S., Krishnan, R. & Rao, K.K. (1993). A rule-case based system for image analysis. In, *Proc. 1st. European Workshop on Case-Based Reasoning, Posters & Presentations*, 2: pp.410-15.
- [28] Kitano, H. (1993). Challenges for massive parallelism. In, *Proc. 13th. Int. Conference on Artificial Intelligence, IJCAI-93*: pp813-34.
- [29] Roger. C. S · David. B. L · *Creativity and Learning in a Case-based Explainer* · AI · 1989 · 40 : 353~385
- [30] Sun Mingxi, Wu Junqing, Ai Guoqiang, et.,al. *Practical Prediction Method and Instance Analysis*. Beijing: Science and Technology Document Press, 1993.
- [31] Liu Mao, Wu Zongzhi, *Introduction to Emergency Rescue - Emergency Rescue System and Programs*. BeiJixianng: Chemical Industry Press, 2004
- [32] Xiong wei, *Operational Research*. BeiJixianng: Mechanical Industry Press, 2005
- [33] Wayne L. Winston, *Operations Research Application and Algorithms*. BeiJixianng: Tsinghua University Press, 2006
- [34] Donald Waters. *Logistics: An Introduction to Supply Chain Management*. BeiJixianng: Electronic Industry Press, 2006
- [35] He Jixiananmin, Liu Chunlin, Cao Jixianedeng et al., *Emergency Management and Emergency Response System - Location, Scheduling and Algorithms*. BeiJixianng: Science and Technology Press, 2007
- [36] Zhu Tan, Liu Mao and Zhao Guomin. *Study of points of urban public security planning and developing*. China's Development 2003 (4) pp.10-12
- [37] Liu Mao, Zhu Tan and Zhao Guomin. *Study of urban public security emergency systems*. China's development 2003 (4) pp.13-16
- [38] Chen Zhizong and You Jixiananxin. *Modeling of hierarchy location for urban disaster prevention and mitigation facilities*. *Journal of Natural Disasters*, 2005 Volume 14 (2) pp.131-135
- [39] Sun Ying, Chi Hong, Jixiana Chuanliang. *Non-linear mixed integer planning model of multipath emergency resource scheduling*. in *Operations Research and Management*, 2007, pp.16.
- [40] Zhou Xiaomeng, Jixianang Lizhen, Zhang Yunlong. *Study of emergency resource optimal allocation quantitative model for unforeseen accidents*. *Journal of Safety and Environment*, 2007, pp.6.
- [41] Larson R E, Carstea J L. *Dynamic programming principle* [M]. Chen Weiji, Wang Yongxian, Yang Jiaben. Trans, Beijing:Tsinghua University Press, 1984.
- [42] Bertsekas D P. *Dynamic programming: deterministic and stochastic models*[M].Trans. Xi'an: Xi'an Jiaotong University Press, 1990.
- [43] Feinberg E A, Shwartzz A. *Markov decision models with weighted discounted criteria* [J]. *Math O R*, 1994, 19:152-168.
- [44] Bouakiz M, Kebir Y. *Target-level criterion in Markov decision processes*[J]. *J Optim Theory Appl*, 1995, 86:1-15.

- [45] Chen M, Filar J A, Liu K. *Semi-infinite Markov decision processes*[J]. Mathematical Methods of Operations Research, 2000, 51:115-117.

IntechOpen

IntechOpen



Novel Approaches and Their Applications in Risk Assessment

Edited by Dr. Yuzhou Luo

ISBN 978-953-51-0519-0

Hard cover, 344 pages

Publisher InTech

Published online 20, April, 2012

Published in print edition April, 2012

Risk assessment is a critical component in the evaluation and protection of natural or anthropogenic systems. Conventionally, risk assessment is involved with some essential steps such as the identification of problem, risk evaluation, and assessment review. Other novel approaches are also discussed in the book chapters. This book is compiled to communicate the latest information on risk assessment approaches and their effectiveness. Presented materials cover subjects from environmental quality to human health protection.

How to reference

In order to correctly reference this scholarly work, feel free to copy and paste the following:

Jianfeng Li, Wenmao Liu and Bin Zhang (2012). Theories and Methods for the Emergency Rescue System, Novel Approaches and Their Applications in Risk Assessment, Dr. Yuzhou Luo (Ed.), ISBN: 978-953-51-0519-0, InTech, Available from: <http://www.intechopen.com/books/novel-approaches-and-their-applications-in-risk-assessment/theories-and-methods-for-the-emergency-rescue-system>

INTECH
open science | open minds

InTech Europe

University Campus STeP Ri
Slavka Krautzeka 83/A
51000 Rijeka, Croatia
Phone: +385 (51) 770 447
Fax: +385 (51) 686 166
www.intechopen.com

InTech China

Unit 405, Office Block, Hotel Equatorial Shanghai
No.65, Yan An Road (West), Shanghai, 200040, China
中国上海市延安西路65号上海国际贵都大饭店办公楼405单元
Phone: +86-21-62489820
Fax: +86-21-62489821

© 2012 The Author(s). Licensee IntechOpen. This is an open access article distributed under the terms of the [Creative Commons Attribution 3.0 License](https://creativecommons.org/licenses/by/3.0/), which permits unrestricted use, distribution, and reproduction in any medium, provided the original work is properly cited.

IntechOpen

IntechOpen