

# We are IntechOpen, the world's leading publisher of Open Access books Built by scientists, for scientists

6,900

Open access books available

186,000

International authors and editors

200M

Downloads

Our authors are among the

154

Countries delivered to

TOP 1%

most cited scientists

12.2%

Contributors from top 500 universities



WEB OF SCIENCE™

Selection of our books indexed in the Book Citation Index  
in Web of Science™ Core Collection (BKCI)

Interested in publishing with us?  
Contact [book.department@intechopen.com](mailto:book.department@intechopen.com)

Numbers displayed above are based on latest data collected.  
For more information visit [www.intechopen.com](http://www.intechopen.com)



# Introductory Chapter: Electromagnetic Propagation and Waveguides in Photonics and Microwave Engineering

*Patrick Steglich*

## 1. Introduction

Waves can propagate as spherical waves in open space. In this case, the power of the wave decreases with the distance from the source as the square of the distance. In contrast, a waveguide can confine the propagating wave in such a way that the wave propagates only in one dimension. Assuming ideal conditions, the wave is not losing power while it propagates inside the waveguide.


Waveguides play a major role for applications in communications and sensing technologies. The theoretical understanding and practical investments are crucial to develop future innovations.

In photonics, two major types of waveguides can be distinguished, namely optical fibers and integrated waveguides. Waveguides in photonics operate typically in the visible and infrared light spectra.


Optical fibers are used for data transmission, as fiber lasers, for flexible transmission of laser radiation or for lighting, for sensor applications or decoration purposes [1]. The main application of optical fibers, however, is their use in telecommunication systems, making our daily life easier by a fast internet connection [2]. Other important technical applications of optical fibers are lasers [3], interferometers [4, 5], amplifier [6], and sensors [7]. The latter is important since it allows the detection of magnetic fields [8], humidity [9], temperature [10], and biological molecules [11, 12]. Massive research investments in the field of optical fibers [13–15] have led to novel applications. One important example is the use of optical for endoscopic applications [16, 17]. Also the fiber core has been modified (**Figure 1**), so that novel applications such as gas sensor can be addressed.

Integrated waveguides confine light in submicrometer structures on chip. Such waveguide structures are made either by doping the substrate material or by structuring it with etching procedures. Mostly, such waveguides are formed by patterning semiconductor materials like silicon, which is known as photonic integrated circuit technology [18]. The dimension of those waveguides in single mode operation is typically about 220 nm in width and 500 nm in height. **Figure 2** shows three different types of waveguides based on silicon.

The main applications are electro-optical modulators in telecommunications [19] and integrated sensors [20, 21] for point-of-care-diagnostics, environmental monitoring, or food analysis [22, 23]. A relatively novel approach is the silicon-organic hybrid technology [24–26]. Here, the silicon-based waveguide is covered with organic materials [27–29] leading to highly energy-efficient modulators [30] with large 3-dB

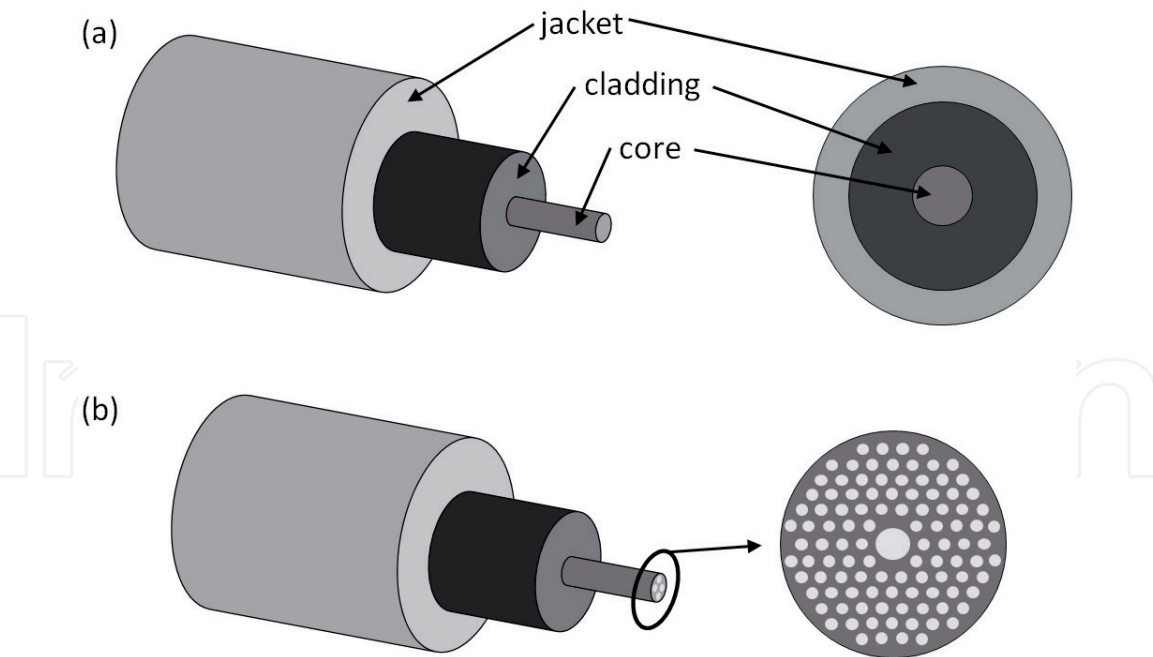

**Figure 1.** Optical fiber with simple homogeneous fiber core (a) and with photonic crystals, also known as hollow core fiber (b).

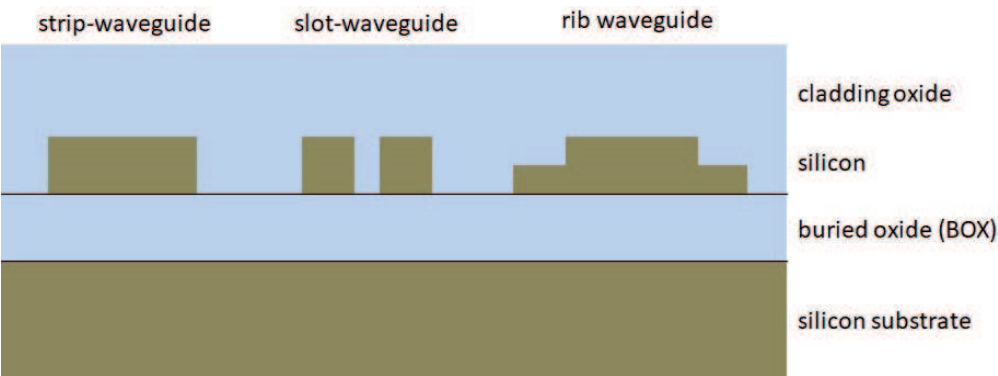

**Figure 2.** Integrated optical waveguides based on silicon used in photonic integrated circuits.

modulation bandwidth [31]. This technology mainly uses slot waveguides because they provide a large overlap of optical and electrical field. Novel waveguide structures like slot waveguides [32–35] allow also the use of the quadratic electro-optical effect [36–38] and the electric field-induced linear electro-optical effect [39–40]. This gives perspective to novel modulation schemes and applications in programmable photonics.

Before optical waveguides were integrated into semiconductor chips, metal lines were already implemented several years ago, forming microwave waveguides [41]. These waveguides are used in microwave engineering. The short wavelengths distinguish microwave engineering from electronics. One particular example of microwave waveguides is the so called hollow metal pipe. A hollow metal pipe is a waveguide for electromagnetic waves, typically in the frequency range from 1 to 200 GHz [42]. Such waveguides are metal tubes with a generally rectangular, circular, or elliptical cross section. They have been studied and applied to industrial applications since almost one century [43]. New fabrication methods like 3D printing led to a renewed attention on this type of waveguide [44]. For example, practical work on microwaves concentrated on the low frequency end of the radio spectrum because it allows a long-range communication [45].

IntechOpen

## Author details

Patrick Steglich<sup>1,2</sup>

1 IHP—Leibniz-Institut für Innovative Mikroelektronik, Frankfurt (Oder),  
Germany

2 Technische Hochschule Wildau, Wildau,

\*Address all correspondence to: [patrick.steglich@th-wildau.de](mailto:patrick.steglich@th-wildau.de)

## IntechOpen

© 2020 The Author(s). Licensee IntechOpen. This chapter is distributed under the terms of the Creative Commons Attribution License (<http://creativecommons.org/licenses/by/3.0>), which permits unrestricted use, distribution, and reproduction in any medium, provided the original work is properly cited. 

## References

- [1] Steglich P, De Matteis F. Introductory chapter: Fiber optics. In: *Fiber Optics - from Fundamentals to Industrial Applications*. Rijeka: IntechOpen; 2019
- [2] Steglich P, Heise K. *Photonik einfach erklärt: Wie Licht die Industrie revolutioniert*. Heidelberg: Springer-Verlag; 2019
- [3] Duval S et al. Femtosecond fiber lasers reach the mid-infrared. *Optica*. 2015;**2**(7):623-626
- [4] Zhou J et al. Intensity modulated refractive index sensor based on optical fiber Michelson interferometer. *Sensors and Actuators B: Chemical*. 2015;**208**:315-319
- [5] Lee, Ha B, et al. Interferometric fiber optic sensors. *Sensors*. 2012;**12**.3:2467-2486
- [6] Firstov SV et al. A 23-dB bismuth-doped optical fiber amplifier for a 1700-nm band. *Scientific Reports*. 2016;**6**:28939
- [7] Hernaez M, Zamarreño CR, Melendi-Espina S, Bird LR, Mayes AG, Arregui FJ. Optical fibre sensors using graphene-based materials: A review. *Sensors*. 2017;**17**:155
- [8] Zheng Y et al. Optical fiber magnetic field sensor based on magnetic fluid and microfiber mode interferometer. *Optics Communications*. 2015;**336**:5-8
- [9] Gao R et al. Humidity sensor based on power leakage at resonance wavelengths of a hollow core fiber coated with reduced graphene oxide. *Sensors and Actuators B: Chemical*. 2016;**222**:618-624
- [10] Hernández-Romano I et al. Optical fiber temperature sensor based on a microcavity with polymer overlay. *Optics Express*. 2016;**24**(5):5654-5661
- [11] Ricciardi A et al. Lab-on-fiber technology: A new vision for chemical and biological sensing. *Analyst*. 2015;**140**(24):8068-8079
- [12] Liu X, Zhang Y. Optical fiber probe-based manipulation of cells. In: *Fiber Optics - from Fundamentals to Industrial Applications*, Patrick Steglich and Fabio De Matteis. Rijeka: IntechOpen; 2018
- [13] Shuto Y. Cavity generation modeling of fiber fuse in single-mode optical fibers. In: *Fiber Optics—From Fundamentals to Industrial Applications*, Patrick Steglich and Fabio De Matteis. Rijeka: IntechOpen; 2018
- [14] Michel YP, Lucci M, Casalboni M, Steglich P, Schrader S. Mechanical characterisation of the four most used coating materials for optical fibres. In: *2015 International Conference on Photonics, Optics and Laser Technology (PHOTOPTICS)*. Berlin: IEEE; 2015. pp. 91-95
- [15] Bahl M. Structured light fields in optical fibers. In: *Fiber Optics—From Fundamentals to Industrial Applications*, Patrick Steglich and Fabio De Matteis. Rijeka: IntechOpen; 2019
- [16] Pulwer S, Fiebelkorn R, Zesch C, Steglich P, Villringer C, Villasmunta F, et al. Endoscopic orientation by multimodal data fusion. In: *Proceeding SPIE 10931, MOEMS and Miniaturized Systems XVIII*, 1093114. 4 March 2019. DOI: 10.1117/12.2508470
- [17] Pulwer s, Steglich P, Villringer C, Bauer J, Burger M, Franz M, et al. Triangulation-based 3D surveying borescope. In: *Proceeding SPIE 9890, Optical Micro- and Nanometrology VI*, 989009. 26 April 2016. DOI: 10.1117/12.2225203
- [18] Mai A, Steglich P, Mai C, Simon S, Scholz R. Electronic-photonic



wafer-level technologies for fast prototyping and application specific solutions. In: 2019 PhotonIcs & Electromagnetics Research Symposium—Spring (PIERS-Spring). Rome, Italy: IEEE; 2019. pp. 249-255

[19] Alimonti G et al. Use of silicon photonics wavelength multiplexing techniques for fast parallel readout in high energy physics. Nuclear Instruments and Methods in Physics Research Section A: Accelerators, Spectrometers, Detectors and Associated Equipment. 2019;936:601-603

[20] Steglich P et al. Hybrid-waveguide ring resonator for biochemical sensing. IEEE Sensors Journal. 2017;17(15):4781-4790

[21] Mai A, Bondarenko S, Mai C, Steglich P. Photonic thermal sensor integration towards electronic-photonic-IC technologies. In: ESSDERC 2019—49th European Solid-State Device Research Conference (ESSDERC). Cracow, Poland: IEEE; 2019. pp. 254-257

[22] Steglich P, Villringer C, Pulwer S, Casalboni M, Schrader S. Design optimization of silicon-on-insulator slot-waveguides for electro-optical modulators and biosensors. In: Ribeiro P, Raposo M, editors. Photoptics 2015. Springer Proceedings in Physics. Vol. 181. Cham: Springer; 2016

[23] Steglich P, Hülsemann M, Dietzel B, Mai A. Optical biosensors based on silicon-on-insulator ring resonators: A review. Molecules. 2019;24:519

[24] Steglich P, Mai C, Mai A. Silicon-organic hybrid photonic devices in a photonic integrated circuit technology. ECS Journal of Solid State Science and Technology. 2019;8(11):Q217

[25] Mai C, Steglich P, Mai A. Adjustment of the BEOL for back side module integration on wafer level in a silicon photonic technology. In:

MikroSystemTechnik 2019. Berlin, Germany: Congress; 2019. pp. 1-4

[26] Steglich P et al. (keynote) silicon-organic hybrid photonics: Integration of electro-optical polymers in a photonic integrated circuit technology. ECS Transactions. 2019;92.4:187

[27] Steglich P, Mai C, Stolarek D, Lischke S, Kupijai S, Villringer C, et al. Partially slotted silicon ring resonator covered with electro-optical polymer. In: Proceeding SPIE 9891, Silicon Photonics and Photonic Integrated Circuits V, 98910R. 13 May 2016. DOI: 10.1117/12.2217725

[28] Steglich P et al. Functionalized materials for integrated photonics: Hybrid integration of organic materials in silicon-based photonic integrated circuits for advanced optical modulators and light-sources. In: 2019 PhotonIcs & Electromagnetics Research Symposium—Spring (PIERS-Spring). Rome, Italy: IEEE; 2019. pp. 3019-3027

[29] Steglich P et al. Novel ring resonator combining strong field confinement with high optical quality factor. IEEE Photonics Technology Letters. 2015;27(20):2197-2200

[30] Koeber S et al. Femtojoule electro-optic modulation using a silicon-organic hybrid device. Light: Science & Applications. 2015;4(2):e255-e255

[31] Alloatti L et al. 100 GHz silicon-organic hybrid modulator. Light: Science & Applications. 2014;3(5):e173-e173

[32] Steglich P, You KY. Silicon-on-insulator slot waveguides: Theory and applications in electro-optics and optical sensing. In: Emerging Waveguide Technology. Rijeka: IntechOpen; 2018. pp. 187-210

[33] Steglich P, Villringer C, Dümecke S, Michel YP, Casalboni M, Schrader S. Silicon-on-insulator slot-waveguide

design trade-offs. In: 2015 International Conference on Photonics, Optics and Laser Technology (PHOTOPTICS). Berlin: IEEE; 2015. pp. 47-52

[34] Bondarenko S, Villringer C, Steglich P. Comparative study of nano-slot silicon waveguides covered by dye doped and undoped polymer cladding. *Applied Sciences*. 2019;**9**:89

[35] Bondarenko S, Steglich P, Schrader S, Mai A. Simulation study of released silicon-on-insulator slot waveguides in a photonic integrated circuit technology. In: 2019 Photonics & Electromagnetics Research Symposium—Spring (PIERS-Spring). Rome, Italy: IEEE; 2019. pp. 3334-3337. DOI: 10.1109/PIERS-Spring46901.2019.9017643

[36] Steglich P, Mai C, Villringer C, Pulwer S, Casalboni M, Schrader S, et al. Quadratic electro-optic effect in silicon-organic hybrid slot-waveguides. *Optics Letters*. 2018;**43**:3598-3601

[37] Steglich P et al. On-chip dispersion measurement of the quadratic electro-optic effect in nonlinear optical polymers using a photonic integrated circuit technology. *IEEE Photonics Journal*. June 2019;**11**(3):1-10

[38] Steglich P et al. Quadratic electro-optical silicon-organic hybrid RF modulator in a photonic integrated circuit technology. In: 2018 IEEE International Electron Devices Meeting (IEDM). San Francisco, CA: IEEE; 2018. pp. 23.3.1-23.3.4

[39] Steglich P et al. Electric field-induced linear electro-optic effect observed in silicon-organic hybrid ring resonator. *IEEE Photonics Technology Letters*. 2020;**32**(9):526-529

[40] Steglich P et al. Direct observation and simultaneous use of linear and quadratic electro-optical effects.

*Journal of Physics D: Applied Physics*. 2020;**53**(12):125106

[41] Davidson DB. *Computational Electromagnetics for RF and Microwave Engineering*. Cambridge: Cambridge University Press; 2010

[42] Pozar DM. *Microwave Engineering*. 4th Ed. New Jersey: Wiley; 2011

[43] Chu LJ. Electromagnetic waves in elliptic hollow pipes of metal. *Journal of Applied Physics*. 1938;**9**(9):583-591

[44] D'Auria M, Otter WJ, Hazell J, Gillatt BT, Long-Collins C, Ridler NM, et al. 3-D printed metal-pipe rectangular waveguides. *IEEE Transactions on Components, Packaging and Manufacturing Technology*. 2015;**5**(9):1339-1349

[45] Packard KS. The origin of waveguides: A case of multiple rediscovery. *IEEE Transactions on Microwave Theory and Techniques*. 1984;**32**(9):961-969