

We are IntechOpen, the world's leading publisher of Open Access books Built by scientists, for scientists

6,900

Open access books available

186,000

International authors and editors

200M

Downloads

Our authors are among the

154

Countries delivered to

TOP 1%

most cited scientists

12.2%

Contributors from top 500 universities



WEB OF SCIENCE™

Selection of our books indexed in the Book Citation Index
in Web of Science™ Core Collection (BKCI)

Interested in publishing with us?
Contact book.department@intechopen.com

Numbers displayed above are based on latest data collected.
For more information visit www.intechopen.com



Scheduling with Communication Delays

R. Giroudeau and J.C. König
LIRMM
France

1.1 Introduction

More and more parallel and distributed systems (cluster, grid and global computing) are both becoming available all over the world, and opening new perspectives for developers of a large range of applications including data mining, multimedia, and bio-computing. However, this very large potential of computing power remains largely unexploited this being, mainly due to the lack of adequate and efficient software tools for managing this resource.

Scheduling theory is concerned with the *optimal allocation of scarce resources to activities over time*. Of obvious practical importance, it has been the subject of extensive research since the early 1950's and an impressive amount of literature now exists. The *theory* dealing with the design of algorithms dedicated to scheduling is much younger, but still has a significant history.

An application which will be scheduled on a parallel architecture may be represented by an acyclic graph $G = (V, E)$ (or precedence graph) where V designates the set of tasks, which will be executed on a set of m processors, and where E represents the set of precedence constraints. A processing time is allotted to each task $i \in V$.

From the very beginning of the study about scheduling problems, models kept up with changing and improving technology. Indeed,

- In the **PRAM' s model**, in which communication is considered instantaneous, the critical path (the longest path from a source to a sink) gives the length of the schedule. So the aim, in this model, is to find a partial order on the tasks, in order to minimize an objective function.
- In the **homogeneous scheduling delay model**, each arc $(i, j) \in E$ represents the potential data transfer between task i and task j provided that i and j are processed on two different processors. So the aim, in this model, is to find a compromise between a sequential execution and a parallel execution.

These two models have been extensively studied over the last few years from both the complexity and the (non)-approximability points of view (see (Graham et al., 1979) and (Chen et al., 1998)).

With the increasing importance of parallel computing, the question of how to schedule a set of tasks on a given architecture becomes critical, and has received much attention. More precisely, scheduling problems involving precedence constraints are among the most difficult problems in the area of machine scheduling and they are part of the most studied problems in the domain. In this chapter, we adopt the *hierarchical communication model* (Bampis et al., 2003) in which we assume that the communication delays are not homogeneous anymore; the processors are connected into *clusters* and the communications

inside a same cluster are much faster than those between processors belonging to different ones.

This model incorporates the hierarchical nature of the communications using today's parallel computers, as shown by many PCs or workstations networks (NOWs) (Pfister, 1995; Anderson et al., 1995). The use of networks (clusters) of workstations as a parallel computer (Pfister, 1995; Anderson et al., 1995) has not only renewed the user's interest in the domain of parallelism, but it has also brought forth many new challenging problems related to the exploitation of the potential power of computation offered by such a system.

Several approaches meant to try and model these systems were proposed taking into account this technological development:

- One approach concerning the form of programming system, we can quote work (Rosenberg, 1999; Rosenberg, 2000; Blumafe and Park, 1994; Bhatt et al., 1997).
- In abstract model approach, we can quote work (Turek et al., 1992; Ludwig, 1995; Mounié, 2000; Decker and Krandick, 1999; Blayo et al., 1999; Mounié et al., 1999; Dutot and Trystram, 2001) on malleable tasks introduced by (Blayo et al., 1999; Decker and Krandick, 1999). A malleable task is a task which can be computed on several processors and of which the execution time depends on the number of processors used for its execution.

As stated above, the model we adopt here is the *hierarchical communication model* which addresses one of the major problems that arises in the efficient use of such architectures: the *task scheduling problem*. The proposed model includes one of the basic architectural features of NOWs: the hierarchical communication assumption i.e., a level-based hierarchy of communication delays with successively higher latencies. In a formal context where both a set of clusters of identical processors, and a precedence graph $G = (V, E)$ are given, we consider that if two communicating tasks are executed on the same processor (resp. on different processors of the same cluster) then the corresponding communication delay is negligible (resp. is equal to what we call *inter-processor communication delay*). On the contrary, if these tasks are executed on different clusters, then the communication delay is more significant and is called *inter-cluster communication delay*.

We are given m multiprocessor machines (or clusters denoted by Π^i) that are used to process n precedence-constrained tasks. Each machine Π^i (cluster) comprises several identical parallel processors (denoted by π_k^i). A couple (c_{ij}, ϵ_{ij}) of communication delays is associated to each arc (i, j) between two tasks in the precedence graph. In what follows, c_{ij} (resp. ϵ_{ij}) is called inter-cluster (resp. inter-processor) communication, and we consider that $c_{ij} \geq \epsilon_{ij}$. If tasks i and j are allotted on different machines Π^i and Π^j , then j must be processed at least c_{ij} time units after the completion of i . Similarly, if i and j are processed on the same machine Π^i but on different processors $\pi_{k'}^i$ and $\pi_{k''}^i$ (with $k' \neq k''$) then j can only start ϵ_{ij} units of time after the completion of i . However, if i and j are executed on the same processor, then j can start immediately after the end of i . The communication overhead (inter-cluster or inter-processor delay) does not interfere with the availability of processors and any processor may execute any task. Our goal is to find a feasible schedule of tasks minimizing the *makespan*, i.e., the time needed to process all tasks subject to the precedence graph.

Formally, in the **hierarchical scheduling delay model** a hierarchical couple of values (c_{ij}, ϵ_{ij}) will be associated with $(c_{ij}, \epsilon_{ij}) \leq c_{ij} - \forall (i, j) \in E$ such that:

- if $\Pi^i = \Pi^j$ and if $\pi_{k'}^i = \pi_{k''}^j$ then $t_i + p_i \leq t_j$

- else if $\Pi^i = \Pi^j$ and if $\pi_k^i \neq \pi_{k'}^j$, with $k \neq k'$ then $t_i + p_i + \epsilon_{ij} \leq t_j$
- $\Pi^i \neq \Pi^j$ $t_i + p_i + c_{ij} \leq t_j$

where t_i denotes the starting time of the task i and p_i its duration. The objective is to find a schedule, i.e., an allocation of each task to a time interval on one processor, such that communication delays are taken into account and that completion time (makespan) is minimized (the makespan is denoted by C_{max} and it corresponds to $\max_{i \in V} \{t_i + p_i\}$). In what follows, we consider the simplest case $\forall i \in V, p_i = 1, c_{ij} = c \geq 2, \epsilon_{ij} = c' \geq 1$ with $c \geq c'$.

Note that the hierarchical model that we consider here is a generalization of classical scheduling model with communication delays ((Chen et al., 1998), (Chrétienne and Picouleau, 1995)). Consider, for instance, that for every arc (i, j) of the precedence graph we have $c_{ij} = \epsilon_{ij}$. In such a case, the hierarchical model is exactly the classical scheduling communication delays model.

Note that the values c and l are considered as constant in the following. The chapter is organized as follow: In the next section, some results for *UET-UCT* model will be presented. In the section 1.3, a lower and upper bound for large communication delays scheduling problem will be presented. In the section 1.4, the principal results in hierarchical communication delay model will be presented. In the section 1.5, an influence of an introduction of the duplication on the complexity of scheduling problem is presented. In the section 1.6, some results non-approximability results are given for the total sum of completion time minimization. In the section 1.7, we will conclude on the complexity and approximation scheduling problem in presence of communication delays. In Appendix section, some classical \mathcal{NP} -complete problems are listed which are used in this chapter for the polynomial-time transformations.

1.2 Some results for the *UET-UCT* model

In the **homogeneous scheduling delay model**, each arc $(i, j) \in E$ represents the potential data transfer between task i and task j provided that i and j are processed on two different processors. So the aim, in this model, is to find a compromise between a sequential execution and a parallel execution. These two models have been extensively studied over the last few years from both the complexity and the (non)-approximability points of view (see (Graham et al., 1979) and (Chen et al., 1998)).

1. at any time, a processor executes at most one task;
2. $\forall (i, j) \in E$, if $\pi_i = \pi_j$ then $t_j \geq t_i + p_i$, otherwise $t_j \geq t_i + p_i + c_{ij}$.

The *makespan* of schedule σ is: $C_{max}^\sigma = \max_{i \in V} (t_i + p_i)$

In the *UET-UCT* model, we have $\forall i, p_i = 1$ and $\forall (i, j) \in E, c_{ij} = 1$.

1.2.1 Unbounded number of processors

In the case of there is no communication delays, the problem becomes polynomial (even if we consider that $\forall i, p_i \neq 1$). In fact, the Bellman algorithm can be used.

Theorem 1.2.1 *The problem of deciding whether an instance of $\bar{P}|prec, p_i = 1, c_{ij} = 1|C_{max}$ problem has a schedule of length 5 is polynomial, see (Veltman, 1993).*

Proof

The proof is based on the notion of total unimodularity matrix, see (Veltman, 1993) and see (Schrijver, 1998).

Theorem 1.2.2 *The problem of deciding whether an instance of $\bar{P}|prec, p_i = 1, c_{ij} = 1|C_{max}$ problem has a schedule of length 6 is \mathcal{NP} -complete see (Veltman, 1993).*

Proof

The proof is based on the following reduction $3SAT \propto \bar{P}|prec, p_i = 1, c_{ij} = 1|C_{max} = 6$.

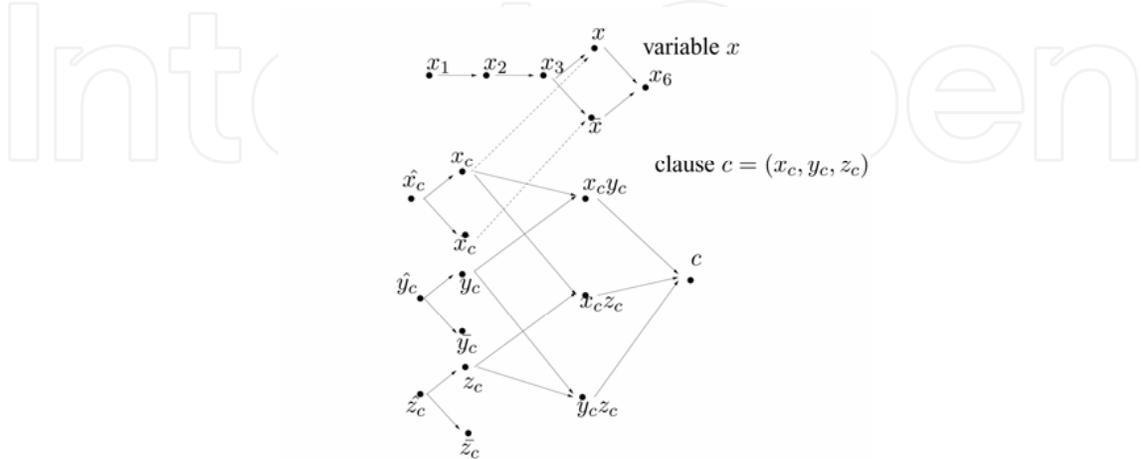


Figure 1.1. The variables-tasks and the clauses-tasks

It is clear that the problem is in \mathcal{NP} .

Let be π^* an instance of 3SAT problem, we construct an instance π of the problem $\bar{P}|prec, p_i = 1, c_{ij} = 1|C_{max}$ in the following way:

- For each variable x , six tasks are introduced: $x_1, x_2, x_3, x, \bar{x}$ and x_6 ; the precedence constraints are given by Figure 1.1.
- For each clause $c = (x_c, y_c, z_c)$, where the literals x_c, y_c and z_c are occurrences of negated or unnegated, 3 variables are introduced:
 $\hat{x}_c, \hat{y}_c, \hat{z}_c, x_c, \bar{x}_c, y_c, \bar{y}_c, z_c, \bar{z}_c, x_c y_c, y_c z_c, x_c z_c$ and c ; precedence constraints between these tasks are also given by Figure 1.1.
- If the occurrence of variable x in the clause c is unnegated then we add $x_c \rightarrow x$ and $\bar{x}_c \rightarrow \bar{x}$.
- If the occurrence of variable x in the clause c is negated, then we add $x_c \rightarrow \bar{x}$ and $\bar{x}_c \rightarrow x$.

Clearly, x_c represents the occurrence of variable x in the clause c ; it precedes the corresponding variable tasks. This is a polynomial-time transformation illustrated by Figure 1.1.

It can be proved that, there exists a schedule of length at most six if and only if there is a truth assignment $I : \mathcal{V} \rightarrow \{0,1\}$ such that each clause in \mathcal{C} has at least one true literal.

Corollary 1.2.1 *There is no polynomial-time algorithm for the problem $\bar{P}|prec, p_i = 1, c_{ij} = 1|C_{max}$ with performance bound smaller than 7/6 unless $\mathcal{P} = \mathcal{NP}$, see (Veltman, 1993).*

Proof

The proof of Corollary 1.2.1 is an immediate consequence of the Impossibility Theorem, (see (Chrétienne and Picouleau, 1995), (Garey and Johnson, 1979)).

1.2.2 Approximate solutions with guaranteed performance

Good approximation algorithms seem to be very difficult to design, since the compromise between parallelism and communication delays is not easy to handle. In this

section, we will present a approximation algorithm with a performance ratio bounded by $4/3$ for the problem $\bar{P}|prec, p_i = 1, c_{ij} = 1|C_{max}$. This algorithm is based on a formulation on a integer linear program. A feasible schedule is obtained by a relaxation and rounding procedure. Notice that it exists a trivial 2-approximation algorithm: the tasks without predecessors are executed at $t = 0$, the tasks admitting predecessors scheduled at $t = 0$ are executed at $t = 2$ and so on.

Given a precedence graph $G = (V, E)$ a *predecessor* (resp. *successor*) of a task i is a task j such that (j, i) (resp. (i, j)) is an arc of G . For every task $i \in V$, $\Gamma^+(i)$ (resp. $\Gamma^-(i)$) denotes the set of immediate successors (resp. predecessors) of i . We denote the tasks without predecessor (resp. successor) by Z (resp. U). We call *source* every task belonging to Z .

The integer linear program The aim of this section is to model the problem $\bar{P}|prec, p_i = 1, c_{ij} = 1|C_{max}$ by an integer linear program (ILP) denoted, in what follows, by Π .

We model the scheduling problem by a set of equations defined on the starting times vector (t_1, \dots, t_n) :

For every arc $(i, j) \in E$, we introduce a variable $x_{ij} \in \{0, 1\}$ which indicates the presence or not of an communication delay, and the following constraints: $\forall (i, j) \in E, t_i + p_i + x_{ij} \leq t_j$.

In every feasible schedule, every task $i \in V - U$ has at most one successor, w.l.o.g. call them $j \in \Gamma^+(i)$, that can be performed by the same processor as i at time $t_j = t_i + p_i$. The other successors of i , if any, satisfy: $\forall k \in \Gamma^+(i) - \{j\}, t_k \geq t_i + p_i + 1$. Consequently, we add the

constraints: $\sum_{j \in \Gamma^+(i)} x_{ij} \geq |\Gamma^+(i)| - 1$.

Similarly, every task i of $V - Z$ has at most one predecessor, w.l.o.g. call them $j \in \Gamma^-(i)$, that can be performed by the same processor as i at times t_j satisfying $t_i - (t_j + p_j) \leq 1$. So, we add

the following constraints: $\sum_{j \in \Gamma^-(i)} x_{ji} \geq |\Gamma^-(i)| - 1$.

If we denote by C_{max} the makespan of the schedule, $\forall i \in V, t_i + p_i < C_{max}$. Thus, in what follows, the following ILP will be considered:

$$(\Pi) \quad \begin{cases} \min C_{max} \\ \forall (i, j) \in E, & x_{ij} \in \{0, 1\} \\ \forall i \in V, & t_i \geq 0 \\ \forall (i, j) \in E, & t_i + p_i + x_{ij} \leq t_j \\ \forall i \in V - U, & \sum_{j \in \Gamma^+(i)} x_{ij} \geq |\Gamma^+(i)| - 1 \\ \forall i \in V - Z, & \sum_{j \in \Gamma^-(i)} x_{ji} \geq |\Gamma^-(i)| - 1 \\ \forall i \in V, & t_i + p_i \leq C_{max} \end{cases}$$

Let Π^{inf} denote the linear program corresponding to Π in which we relax the integrity constraints $x_{ij} \in \{0, 1\}$ by setting $x_{ij} \in [0, 1]$. Given that the number of variables and the number of constraints are polynomially bounded, this linear program can be solved in polynomial time. The solution of Π^{inf} will assign to every arc $(i, j) \in E$ a value $x_{ij} = e_{ij}$ with $0 \leq e_{ij} \leq 1$ and will determine a lower bound of the value of C_{max} that we denote by Θ^{inf} .

Lemma 1.2.1 Θ^{inf} is a lower bound on the value of an optimal solution for $\bar{P}|prec, p_i = 1, c_{ij} = 1|C_{max}$.

Proof This is true since any optimal feasible solution of the scheduling problem must satisfy all the constraints of the integer linear program Π .

Algorithm 1 *Rounding Algorithm and construction of the schedule*

Step 1 [Rounding]

Let be e_{ij} the value of an arc $(i, j) \in E$ given by PL_I^{inf}

$$\begin{cases} \text{if } e_{ij} < 0.5 & \implies x_{ij} = 0 \\ \text{if } e_{ij} \geq 0.5 & \implies x_{ij} = 1 \end{cases}$$

Step 1 [Computation of starting time]

if $i \in Z$ then

$$t_i = 0$$

else

$$t_i = \max \{t_j + 1 + x_{ji}\} \text{ with } j \in \Gamma^-(i) \text{ and } (j, i) \in A_i$$

end if

Step 2

[Construction of the schedule]

Let be $G' = (V; E')$ where $E' = E \setminus \{(i, j) \in E \mid x_{ij} = 1\}$ $\{G'$ is generated by the 0-arcs.

Allotted each connected component of G' on a different processor. Each task is executed at its starting time.

In the following, we call an arc $(i, j) \in E$ a 0-arc (resp. 1-arc) if $x_{ij} = 0$ (resp. $x_{ij} = 1$).

Lemma 1.2.2 *Every job $i \in V$ has at most one successor (resp. predecessors) such that $e_{ij} < 0.5$ (resp. $e_{ji} < 0.5$).*

Proof We consider a task $i \in V$ and his successors j_1, \dots, j_k such that $e_{i,j_1} \leq e_{i,j_2} \leq \dots \leq e_{i,j_k}$. We know that $\sum_{l=1}^k e_{i,j_l} \geq k - 1$, then $2e_{i,j_2} \geq e_{i,j_2} + e_{i,j_1} \geq k - 1 - \sum_{l=3}^k e_{i,j_l}$. Since that $e_{i,j_l} \in [0, 1]$, $\sum_{l=3}^k e_{i,j_l} \leq k - 2$. Then, $2e_{i,j_2} \geq 1$. Therefore $\forall l \in \{2, \dots, k\}$ we have $e_{ij} \geq 0.5$. We use the same arguments for the predecessors.

Lemma 1.2.3 *The scheduling algorithm described above provides a feasible schedule.*

Proof It is clear that each task i admits at most one incoming (resp. outgoing) 0-arcs.

Theorem 1.2.3 *The relative performance ρ^h of our heuristic is bounded above by $\frac{4}{3}$ (Munier and König, 1997).*

Proof Let be a path $x_1 \rightarrow x_2 \rightarrow \dots \rightarrow x_{k+1}$ constituted by $(k + 1)$ tasks such that x (resp. $(k - x)$) arcs values, given by linear programming, between two tasks are less (resp. least) than $1/2$. So the length of this path is less than $k+1+1/2(k-x) = 3/2k - 1/2x + 1$. Moreover, by the rounding procedure, the length of this path at most $2k - x + 1$. Thus, we obtain $\frac{2k-x+1}{3/2k-1/2x+1} < 4/3, \forall x$. Thus, for a given path, of value p^* (resp. p) before (resp. after) the rounding, admitting x arcs values less than $1/2$, we have $\frac{p}{p^*} \leq \frac{2k-x+1}{3/2k-1/2x+1} < 4/3$. A critical path before the rounding phase is denoted by s^* . It is true for the critical path after the rounding procedure $p = s$ then, $\frac{p}{p^*} < \frac{p}{s^*} = \frac{s}{s^*} < 4/3$.

In fact, the bound is tight (see (Munier and König, 1997)).

1.2.3 Bounded number of processors

In this section, a lower and upper bound will be presented,

Theorem 1.2.4 The problem of deciding whether an instance of $P|prec, p_i = 1, c_{ij} = 1|C_{max}$ problem has a schedule of length 3 is polynomial, see (Picouleau, 1995).

Theorem 1.2.5 The problem of deciding whether an instance of $P|prec, p_i = 1, c_{ij} = 1|C_{max}$ problem has a schedule of length 4 is \mathcal{NP} -complete, see (Veltman, 1993).

Proof

The proof is based on the ATP-complete problem **Clique**.

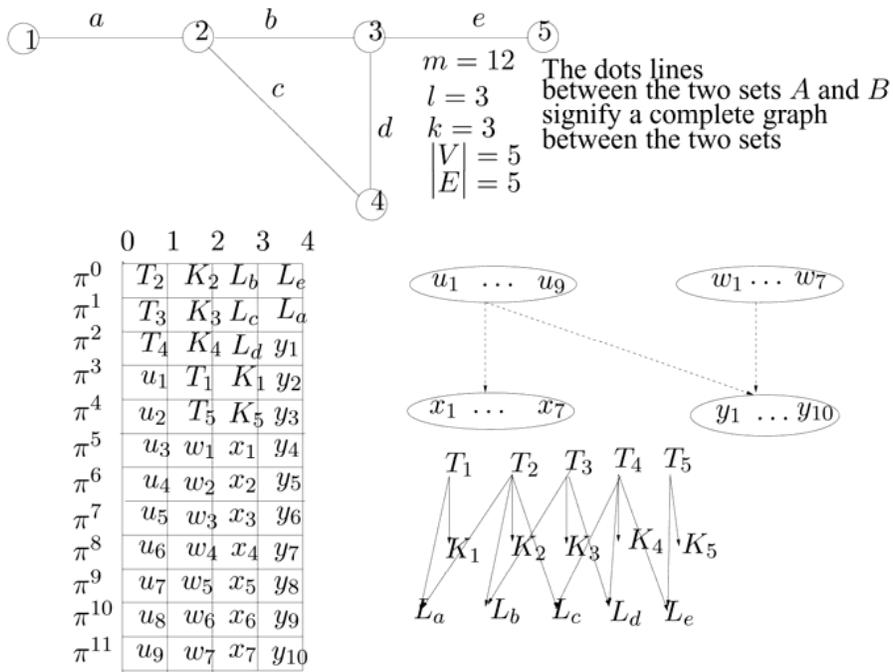


Figure 1.2. Example of polynomial-time reduction clique $\propto P|prec, p_i = 1, c_{ij} = 1|C_{max}$

Let be $l = \frac{k(k-1)}{2}$ the number of edges of a clique of size k . Let be $m' = \max\{|V|+l-k, |E|-l\}$, the number of processors of an instance is $m = 2(m'+1)$. It is clear that the problem is in \mathcal{NP} . The proof is based on the polynomial-time reduction clique $\propto P|prec, p_i = 1, c_{ij} = 1|C_{max}$. Let be π^* a instance of the clique problem. An instance π of $P|prec, p_i = 1, c_{ij} = 1|C_{max}$ problem is constructed in the following way:

- $\forall v \in V$ the tasks T_v, K_v are introduced,
- $\forall e \in E$ a task L_e is created.
 - We add the following precedence constraints: $T_v \rightarrow K_v, \forall v \in V$ and $T_v \rightarrow L_e$ if v is an endpoint of e .
- Four sets of tasks are introduced:
 - $X_x = \{x = 1, \dots, x = m - l - |V| + k\}$,
 - $Y_y = \{y = 1, \dots, y = m - |E| + l\}$,
 - $U_u = \{u = 1, \dots, u = m - k\}$,
 - $W_w = \{w = 1, \dots, w = m - |V|\}$.

the precedence constraints are added: $U_u \rightarrow X_x, U_u \rightarrow Y_y, W_w \rightarrow Y_y$.

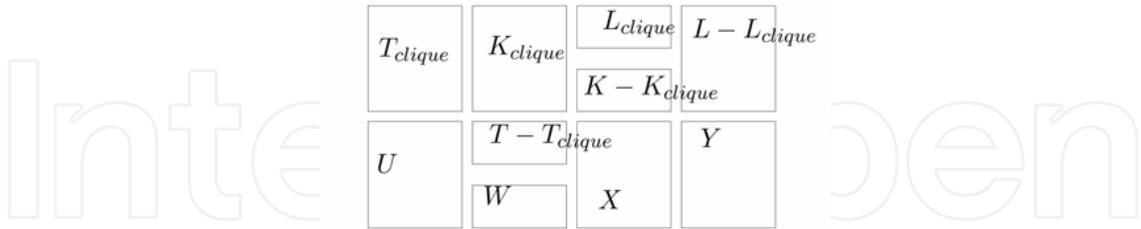


Figure 1.3. Example of construction in order to illustrate the proof of theorem 1.2.5

It easy to see that the graph G admits a clique of size k if only if it exists a schedule of length 4.

1.2.4 Approximation algorithm

In this section, we will present a simple algorithm which gives a schedule σ^m on m machines from a schedule σ^∞ on unbounded number of processors for the $\bar{P}|prec, p_i = 1, c_{ij} = 1|C_{max}$. The validity of this algorithm is based on the fact there is at most a matching between the tasks executed at t_i and the tasks processed at $t_i + 1$.

Theorem 1.2.6 *From all polynomial-time algorithm h^* with performance guarantee ρ for the problem $\bar{P}|prec, p_i = 1, c_{ij} = 1|C_{max}$, we may obtain a polynomial-time algorithm with performance guarantee $(1 + \rho)$ for the problem $P|prec, p_i = 1, c_{ij} = 1|C_{max}$.*

Proof

$$\begin{aligned} C_{max}^{m,A} &\leq \sum_{i=0}^{C_{max}^\infty - 1} \lceil \frac{|X_i|}{m} \rceil \leq \sum_{i=0}^{C_{max}^\infty - 1} (\lfloor \frac{|X_i|}{m} \rfloor + 1) \leq \sum_{i=0}^{C_{max}^\infty - 1} (\lfloor \frac{|X_i|}{m} \rfloor) + C_{max}^\infty \\ &\leq \sum_{i=0}^{C_{max}^\infty - 1} (\frac{|X_i|}{m}) + C_{max}^\infty \leq C_{max}^{opt,m} + C_{max}^{\infty,h^*} \leq C_{max}^{opt,m} + \rho C_{max}^{opt,m} \end{aligned}$$

For example, the 4/3-approximation algorithm gives a 7/3-approximation algorithm. Munier et al. (Munier and Hanen, 1996) propose a $(7/3 - 4/3m)$ -approximation algorithm for the same problem.

Algorithm 2 Scheduling on m machines from a schedule σ^∞ on unbounded number of processors

for $i = 0$ **à** $C_{max}^\infty - 1$ **do**

 Let be X_i the set of tasks executed at ij in σ^∞ using a heuristic h^* .

 The X_i tasks are executed in $\lceil \frac{|X_i|}{m} \rceil$ units of time.

end for

1.3 Large communications delays

Scheduling in presence of large communication delays, is one most difficult problem in scheduling theory, since the starting time of tasks and the communication delay are not be synchronized.

If we consider the problem of scheduling a precedence graph with large communication delays and unit execution time (UET-LCT), on a restricted number of processors, Bampis et

al. in (Bampis et al., 1996) proved that the decision problem denoted by $P|prec, c_{ij} = c \geq 2, p_i = 1|C_{max}$; for $C_{max} = c + 3$ is an \mathcal{NP} -complete problem, and for $C_{max} = c + 2$ (for the special case $c = 2$), they develop a polynomial-time algorithm. This algorithm can not be extended for $c \geq 3$. Their proof is based on a reduction from the \mathcal{NP} -complete problem *Balanced Bipartite Complete Graph, BBCG* (Garey and Johnson, 1979; Saad, 1995). Thus, Bampis et al. (Bampis et al., 1996) proved that the $P|prec, c_{ij} = c \geq 2, p_i = 1|C_{max}$ problem does not possess a polynomial-time approximation algorithm with ratio guarantee better than $(1 + \frac{1}{c+3})$, unless $\mathcal{P} = \mathcal{NP}$.

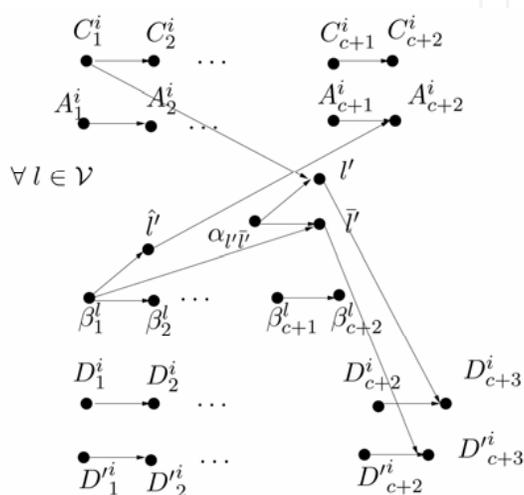


Figure 1.4. A partial precedence graph for the NT1-completeness of the scheduling problem $P|prec, c_{ij} = c \geq 3, p_i = 1|C_{max}$

Theorem 1.3.1 *The problem of deciding whether an instance of $\bar{P}|prec, c_{ij} = c; p_i = 1|C_{max}$ has a schedule of length equal or less than $(c+4)$ is \mathcal{NP} -complete with $c \geq 3$ (see (Giroudeau et al., 2005)).*

Proof

It is easy to see that $\bar{P}|prec, c_{ij} = c; p_i = 1|C_{max} = c + 4 \in \mathcal{NP}$.

The proof is based on a reduction from Π_1 . Given an instance π^* of Π_1 , we construct an instance π of the problem $\bar{P}|prec, c_{ij} = c; p_i = 1|C_{max} = c + 4$, in the following way (Figure 1.4 helps understanding of the reduction):

n denotes the number of variables of π^* .

1. For all $l \in \mathcal{V}$, we introduce $(c + 6)$ variable-tasks: $\alpha_{l\bar{y}}, l', \bar{l}', \hat{l}', \beta_j^l$ with $j \in \{1, 2, \dots, c + 2\}$. We add the precedence constraints: $\alpha_{l\bar{y}} \rightarrow l', \alpha_{l\bar{y}} \rightarrow \bar{l}', \beta_1^l \rightarrow \hat{l}', \beta_1^l \rightarrow \bar{l}', \beta_j^l \rightarrow \beta_{j+1}^l$ with $j \in \{1, 2, \dots, c + 1\}$.
2. For all clauses of length three denoted by $C_i = (y \vee z \vee t)$, we introduce $2 \times (2 + c)$ clause-tasks C_j^i and $A_j^i, j \in \{1, 2, \dots, c + 2\}$, with precedence constraints: $C_j^i \rightarrow C_{j+1}^i$ and $A_j^i \rightarrow A_{j+1}^i, j \in \{1, 2, \dots, c + 1\}$. We add the constraints $C_1^i \rightarrow l$ with $l \in \{y', z', t'\}$ and $l \rightarrow A_{c+2}^i$ with $l \in \{\hat{y}', \hat{z}', \hat{t}'\}$.
3. For all clauses of length two denoted by $C_i = (x \vee \bar{y})$, we introduce $(c + 3)$ clause-tasks $D_j^i, j \in \{1, 2, \dots, c + 3\}$ with precedence constraints: $D_j^i \rightarrow D_j^i$ with $j \in \{1, 2, \dots, c + 2\}$ and $l' \rightarrow D_{c+3}^i$ with $l \in \{x, \bar{y}\}$.

The above construction is illustrated in Figure 1.4. This transformation can be clearly computed in polynomial time.

Remark: \bar{l}^i is in the clause C^i of length two associated with the path $D_1^i \rightarrow D_2^i \rightarrow \dots \rightarrow D_{c+2}^i \rightarrow D_{c+3}^i$.

It is easy to see that there is a schedule of length equal or less than $(c + 4)$ if and only if there is a truth assignment $I : \mathcal{V} \rightarrow \{0, 1\}$ such that each clause in \mathcal{C} has exactly one true literal (i.e. one literal equal to 1), see (Giroudeau et al., 2005).

For the special case $c = 2$, by using another polynomial-time transformation, we state:

Theorem 1.3.2 *The problem of deciding whether an instance of $\bar{P}|prec, c_{ij} = 2; p_i = 1|C_{max}$ has a schedule of length equal or less than six is \mathcal{NP} -complete (see (Giroudeau et al., 2005)).*

Corollary 1.3.1 *There is no polynomial-time algorithm for the problem $\bar{P}|prec, c_{ij} \geq 2; p_i = 1|C_{max}$ with performance bound smaller than $1 + \frac{1}{c+4}$ unless $\mathcal{P} = \mathcal{NP}$ (see (Giroudeau et al., 2005)).*

The limit between the \mathcal{NP} -completeness and the polynomial-time algorithm is given by the following Theorem.

Theorem 1.3.3 *The problem of deciding whether an instance of $\bar{P}|prec, c_{ij} = c; p_i = 1|C_{max}$ with $c \in \{2, 3\}$ has a schedule of length at most $(c + 2)$ is solvable in polynomial time (see (Giroudeau et al., 2005)).*

1.3.1 Approximation by expansion

In this section, a new polynomial-time approximation algorithm with performance guarantee non-trivial for the problem $\bar{P}|prec, c_{ij} \geq 2; p_i = 1|C_{max}$ will be proposed.

Notation: We denote by σ^∞ , the UET-UCT schedule, and by σ_c^∞ the UET-LCT schedule. Moreover, we denote by t_i (resp. t_i^c) the starting time of the task i in the schedule σ^∞ (resp. in the schedule σ_c^∞).

Principle: We keep an assignment for the tasks given by a "good" feasible schedule on an unrestricted number of processors σ^∞ . We proceed to an expansion of the makespan, while preserving communication delays ($t_j^c \geq t_i^c + 1 + c$) for two tasks, i and j with $(i, j) \in E$, processed on two different processors. Consider a precedence graph $G = (V, E)$, we determine a feasible schedule σ^∞ , for the model UET-UCT, using a $(4/3)$ -approximation algorithm proposed by Munier and König (Munier and König, 1997). This algorithm gives a couple $\forall i \in V, (t_i, \pi)$ on the schedule σ^∞ corresponding to: t_i the starting time of the task i for the schedule σ^∞ and π the processor on which the task i is processed at t_i . Now, we determine a couple $\forall i \in V, (t_i^c, \pi^c)$ on schedule σ_c^∞ in the following way: The starting time $t_i^c = d \times t_i = \frac{(c+1)}{2} t_i$ and, $\pi^c = \pi$. The justification of the expansion coefficient is given below. An illustration of the expansion is given in Figure 1.5.

Lemma 1.3.1 *The coefficient of an expansion is $d = \frac{(c+1)}{2}$.*

Proof Consider two tasks i and j such that $(i, j) \in E$, which are processed on two different processors in the feasible schedule σ^∞ . Let be d a coefficient d such that $t_i^c = d \times t_i$ and $t_j^c = d \times t_j$. After an expansion, in order to respect the precedence constraints and the communication delays we must have $t_j^c \geq t_i^c + 1 + c$, and so

$$d \times t_i - d \times t_j \geq c + 1, \quad d \geq \frac{c+1}{t_i - t_j}, \quad d \geq \frac{c+1}{2}. \quad \text{It is sufficient to choose } d = \frac{(c+1)}{2}.$$

Lemma 1.3.2 *An expansion algorithm gives a feasible schedule for the problem denoted by $\bar{P}|prec, c_{ij} = c \geq 2; p_i = 1|C_{max}$.*

Proof It is sufficient to check that the solution given by an expansion algorithm produces a feasible schedule for the model UET-LCT. Consider two tasks i and j such that $(i, j) \in E$. We

denote by π_i , (resp. π_j) the processor on which the task i (resp. the task j) is executed in the schedule σ^∞ . Moreover, we denote by π'_i (resp. π'_j) the processor on which the task i (resp. the task j) is executed in the schedule σ_c^∞ . Thus,

- If $\pi_i = \pi_j$ then $\pi'_i = \pi'_j$. Since the solution given by Munier and König (Munier and König, 1997) gives a feasible schedule on the model UET-UCT, then we have $t_i + 1 \leq t_j$, $\frac{2}{c+1}t_i^c + 1 \leq \frac{2}{c+1}t_j^c$; $t_i^c + 1 \leq t_i^c + \frac{c+1}{2} \leq t_j^c$
- If $\pi_i \neq \pi_j$ then $\pi'_i \neq \pi'_j$. We have $t_i + 1 + 1 \leq t_j$, $\frac{2}{c+1}t_i^c + 2 \leq \frac{2}{c+1}t_j^c$; $t_i^c + (c+1) \leq t_j^c$

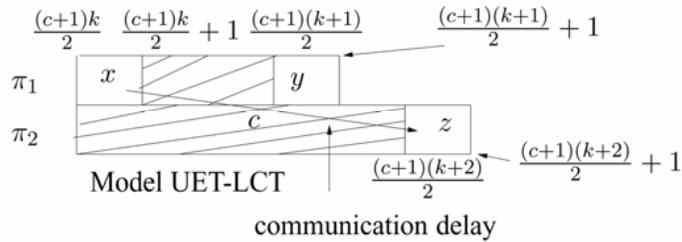



Figure 1.5. Illustration of notion of an expansion

Theorem 1.3.4 An expansion algorithm gives a $\frac{2(c+1)}{3}$ -approximation algorithm for the problem $\bar{P}|prec, c_{ij} = c \geq 2; p_i = 1|C_{max}$.

Proof

We denote by C_{max}^h (resp. C_{max}^{opt}) the makespan of the schedule computed by the Munier and König (resp. the optimal value of a schedule σ^∞). In the same way we denote by C_{max}^{h*} (resp. $C_{max}^{opt,c}$) the makespan of the schedule computed by our algorithm (resp. the optimal value of a schedule σ_c^∞).

We know that $C_{max}^h \leq \frac{4}{3}C_{max}^{opt}$. Thus, we obtain

$$\frac{C_{max}^{h*}}{C_{max}^{opt,c}} = \frac{\frac{(c+1)}{2}C_{max}^h}{C_{max}^{opt,c}} \leq \frac{\frac{(c+1)}{2}C_{max}^h}{C_{max}^{opt}} \leq \frac{\frac{(c+1)}{2} \cdot \frac{4}{3}C_{max}^{opt}}{C_{max}^{opt}} \leq \frac{2(c+1)}{3}.$$

This expansion method can be used for other scheduling problems.

1.4 Complexity and approximation of hierarchical scheduling model

On negative side, Bampis et al. in (Bampis et al., 2002) studied the impact of the hierarchical communications on the complexity of the associated problem. They considered the simplest case, i.e., the problem $\bar{P}(P2)|prec; (c_{ij}, \epsilon_{ij}) = (1, 0); p_i = 1|C_{max}$, and they showed that this problem did not possess a polynomial-time approximation algorithm with a ratio guarantee better than $5/4$ (unless $\bar{P} = \mathcal{NP}$).

	Lower bound	
(c_{ij}, ϵ_{ij})	C_{max}	References
(1, 0)	$\rho \geq 5/4$	see (Bampis et al., 2002)
(2, 1)	$\rho \geq 6/5$	see (Giroudeau, 2005)
(c, c')	$\rho \geq 1 + \frac{1}{c+3}$	see (Giroudeau and König, 2004)

Table 1.1: Previous complexity results for unbounded number of machines for hierarchical communication delay model

Recently, (Giroudeau, 2005) Giroudeau proved that there is no hope to find a ρ -approximation with $\rho < 6/5$ for the couple of communication delays $(c_{ij}, \epsilon_{ij}) = (2, 1)$. If duplication is allowed, Bampis et al. (Bampis et al., 2000a) extended the result of (Chrétienne and Colin, 1991) in the case of hierarchical communications, providing an optimal algorithm for $\bar{P}(P2)|prec; (c_{ij}, \epsilon_{ij}) = (1, 0); p_i = 1; dup|C_{max}$. These complexity results are given in Table 1.1.

On positive side, the authors presented in (Bampis et al., 2000b) a $8/5$ -approximation algorithm for the problem $\bar{P}(P2)|prec; (c_{ij}, \epsilon_{ij}) = (1, 0); p_i = 1|C_{max}$ which is based on an integer linear programming formulation. They relax the integrity constraints and they produce a feasible schedule by rounding. This result is extended to the problem $\bar{P}(P2)|prec; (c_{ij}, \epsilon_{ij}) = (1, 0); p_i = 1|C_{max}$ leading to a $\frac{4l}{2l+1}$ -approximation algorithm (see below).

The challenge is to determinate a threshold for the approximation algorithm concerning the two more general problems: $\bar{P}(Pl \geq 4)|prec; (c_{ij}, \epsilon_{ij}) = (c, 1); p_i = 1|C_{max}$ and $\bar{P}(Pl \geq 4)|prec; (c_{ij}, \epsilon_{ij}) = (c, c'); p_i = 1|C_{max}$ with $c' < c$.

Recently, in (Giroudeau et al., 2005), the authors proved that there is no possibility of finding a p -approximation with $p < 1 + 1/(c + 4)$ (unless $\mathcal{P} = \mathcal{NP}$) for the case where all tasks of the precedence graph have unit execution times, where the multiprocessor is composed of an unrestricted number of machines, and where c denotes the communication delay between two tasks i and j both submitted to a precedence constraint and which have to be processed by two different machines (this problem is denoted in the following UET-LCT (Unit Execution Time Large Communication Time) homogeneous scheduling communication delays problem). The problem becomes polynomial whenever the makespan is at most $(c + 1)$. The case of $(c + 2)$ is still partially opened. In the same way as for the hierarchical communication delay model, for the couple of communication delay values $(1, 0)$, the authors proved in (Bampis et al., 2002) that there is no possibility of finding a ρ -approximation with $\rho < 5/4$ (this problem is detailed in following the UET-UCT hierarchical scheduling communication delay problem).

Theorem 1.4.1 *The problem of deciding whether an instance of $\bar{P}(Pl \geq 4)|prec; (c_{ij}, \epsilon_{ij}) = (c, c'); p_i = 1|C_{max}$ having a schedule of length at most $(c + 3)$ is \mathcal{NP} -complete, see (Giroudeau and König, 2004).*

Corollary 1.4.1 *There is no polynomial-time algorithm for the problem $\bar{P}(Pl \geq 4)|prec; (c_{ij}, \epsilon_{ij}) = (c, c'); p_i = 1|C_{max}$ with $c > d$ performance bound smaller than $1 + \frac{1}{c+3}$ unless $\mathcal{P} = \mathcal{NP}$, see (Giroudeau and König, 2004).*

The problem of deciding whether an instance of $\bar{P}(Pl)|prec; (c_{ij}, \epsilon_{ij}) = (c > 0, c'); p_i = 1|C_{max}$ having a schedule of length at most $(c + 1)$ is solvable in polynomial time since l and c are constant.

In the same way as the section 1.2.2, the aim is to model the problem

$\bar{P}(P2)|prec; (c_{ij}, \epsilon_{ij}) = (1, 0); p_i \geq 1|C_{max}$ by an integer linear program (ILP) denoted, in what follows, by Π .

In this section, we will precise only the difference between the ILP given for the problem $\bar{P}|prec; c_{ij} = 1; p_i = 1|C_{max}$ and $\bar{P}(P2)|prec; (c_{ij}, \epsilon_{ij}) = (1, 0); p_i \geq 1|C_{max}$.

In every feasible schedule, every task $i \in V - U$ has at most two successors, w.l.o.g. call them j_1 and $j_2 \in \Gamma^+(i)$, that can be performed by the same cluster as i at time $t_{j_1} = t_{j_2} = t_i + p_i$. The other successors of i , if any, satisfy: $\forall k \in \Gamma^+(i) - \{j_1, j_2\}, t_k \geq t_i + p_i + 1$. Consequently, the constraints: $\sum_{j \in \Gamma^+(i)} x_{ij} \geq |\Gamma^+(i)| - 2$ are added.

Similarly, every task i of $V - Z$ has at most two predecessors, w.l.o.g. call them j_1 and $j_2 \in \Gamma^-(i)$, that can be performed by the same cluster as i at times t_{j_1}, t_{j_2} satisfying $t_i - (t_{j_1} + p_{j_1}) < 1$ and $t_i - (t_{j_2} + p_{j_2}) < 1$. So, the following constraints: $\sum_{j \in \Gamma^-(i)} x_{ji} \geq |\Gamma^-(i)| - 2$ are added.

The above constraints are necessary but not sufficient conditions in order to get a feasible schedule for the problem. For instance, a solution minimizing C_{max} for the graph of case (a) in Figure 1.6 will assign to every arc the value 0. However, since every cluster has two processors, and so at most two tasks can be processed on the same cluster simultaneously, the obtained solution is clearly not feasible. Thus, the relaxation of the integer constraints, by considering $0 \leq x_{ij} \leq 1$, and the resolution of the resulting linear program with objective function the minimization of C_{max} , gives just a lower bound of the value of C_{max} .

In order to improve this lower bound, we consider every sub-graph of G that is isomorphic to the graphs given in Figure 1.6 -cases (a) and (b). It is easy to see that in any feasible schedule of G , at least one of the variables associated to the arcs of each one of these graphs must be set to one. So, the following constraints are added:

- For the case (a):

$$\forall i, j, k, l, m \in V, \text{ such that } (j, i), (j, k), (l, k), (l, m) \in E, x_{ji} + x_{jk} + x_{lk} + x_{lm} \geq 1.$$

- For the case (b):

$$\forall i, j, k, l, m \in V, \text{ such that } (i, j), (k, j), (k, l), (m, l) \in E, x_{ij} + x_{kj} + x_{kl} + x_{ml} \geq 1.$$

Thus, in what follows, the following ILP will be considered:

$$(\Pi) \begin{cases} \forall (i, j) \in E, & \min C_{max} \\ \forall i \in V, & x_{ij} \in \{0, 1\} \\ \forall (i, j) \in E, & t_i \geq 0 \\ \forall i \in V - U, & t_i + p_i + x_{ij} \leq t_j \\ & \sum_{j \in \Gamma^+(i)} x_{ij} \geq |\Gamma^+(i)| - 2 \\ \forall i \in V - Z, & \sum_{j \in \Gamma^-(i)} x_{ji} \geq |\Gamma^-(i)| - 2 \\ \forall i, j, k, l, m \in V, \setminus (j, i), (j, k), (l, k), (l, m) \in E, & x_{ji} + x_{jk} + x_{lk} + x_{lm} \geq 1 \\ \forall i, j, k, l, m \in V, \setminus (i, j), (k, j), (k, l), (m, l) \in E, & x_{ij} + x_{kj} + x_{kl} + x_{ml} \geq 1 \\ \forall i \in V, & t_i + p_i \leq C_{max} \end{cases}$$

Once again the integer linear program given above does not always imply a feasible solution for the scheduling problem. For instance, if the precedence graph given in Figure 1.7 is considered, the optimal solution of the integer linear program will set all the arcs to 0. Clearly, this is not a feasible solution for our scheduling problem. However, the goal in this step is to get a good lower bound of the makespan and a solution -eventually not feasible- that we will transform to a feasible one.

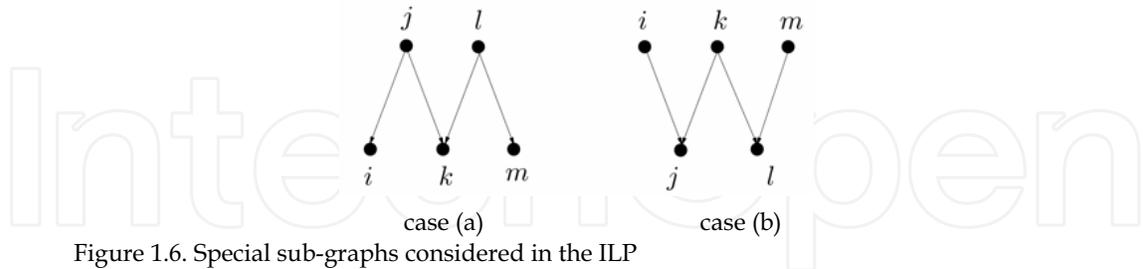



Figure 1.6. Special sub-graphs considered in the ILP

Figure 1.7 An optimal solution of the ILP Π does not always imply a feasible solution

Let Π^{inf} denote the linear program corresponding to Π in which we relax the integrability constraints $x_{ij} \in \{0,1\}$ by setting $x_{ij} \in [0,1]$. Given that the number of variables and the number of constraints are polynomially bounded, this linear program can be solved in polynomial time. The solution of Π^{inf} will assign to every arc $(i, j) \in E$ a value $x_{ij} = e_{ij}$ with $0 \leq e_{ij} \leq 1$ and will determine a lower bound of the value of C_{max} that we denote by Θ^{inf} .

Lemma 1.4.1 Θ^{inf} is a lower bound on the value of an optimal solution for $\bar{P}(P2)|prec; (c_{ij}, \epsilon_{ij}) = (1, 0); p_i \geq 1|C_{max}$.

Proof

See the proof of Theorem 1.2.1.

We use the algorithm 1 for the rounding algorithm by changing the value rounded: $e_{ij} < 0.25$ instead $e_{ij} < 0.5$. The solution given by Step 1 is not necessarily a feasible solution (take for instance the precedence graph of Figure 1.7), so we must transform it to a feasible one. Notice that the cases given in Figure 1.6 are eliminated by the linear program. In the next step we need the following definition.

Definition 1.4.1 A critical path with terminal vertex $i \in V$ is the longest path from an arbitrary source of G to task i . The length of a path is defined as the sum of the processing times of the tasks belonging to this path and of the values x_{ij} for every arc in the path.

1. Step 2 [Feasible Rounding]: We change the integer solution as follows:

- a) If i is a source then we keep unchanged the values of x_{ij} obtained in Step 1.
- b) Let i be a task such that all predecessors are already examined. Let A_i be the subset of incoming arcs of i belonging to a critical path with terminal vertex the task i .
 - i) If the set A_i contains a 0-arc, then all the outgoing arcs x_{ij} take the value 1.
 - ii) If the set A_i does not contain any 0-arc (all the critical incoming arcs are valued to 1), then the value of all the outgoing arcs x_{ij} remains the same as in Step 1, and all the incoming 0-arcs are transformed to 1-arcs.

In Step 1 b) ii) changing the value of an incoming 0-arc to 1 does not increase the length of any critical path having as terminal vertex i , because it exists at least one critical path with terminal vertex i such that an arc $(j, i) \in E$ is valued by the linear program to at least 0.25 ($e_{ji} \geq 0.25$), and so x_{ji} is already equal to 1.

Lemma 1.4.2 Every job $i \in V$ has at most two successors (resp. predecessors) such that $e_{ij} < 0.25$ (resp. $e_{ji} < 0.25$) and The scheduling algorithm described above provides a feasible schedule.

Theorem 1.4.2 The relative performance ρ^h of our heuristic is bounded above by $\frac{8}{5}$ and the bound is tight, see (Bampis et al, 2003).

Proof

See the proof of the Theorem 1.2.3.

1.5 Duplication

The duplication of the tasks has been introduced first by Papadimitriou and Yannakakis (Papadimitriou and Yannakakis, 1990) in order to reduce an influence of the communication delays on the schedule. In (Papadimitriou and Yannakakis, 1990), the authors develop a 2-approximation algorithm for the problem $\bar{P}|prec; c_{ij} = c \geq 2; p_i = 1; dup|C_{max}$. The problem $\bar{P}|prec; SCT|C_{max}$ (the problem $\bar{P}|prec; c_{ij} = 1; p_i = 1|C_{max}$ is a subproblem of $\bar{P}|prec; SCT|C_{max}$) becomes easy. In the following, we will describe the procedure. We may assume w.l.o.g. that all the copies of any task $i \in V$ start their execution at the same time, call it t_i .

1.5.1 Colin-Chrétienne Algorithm see (Chrétienne and Colin, 1991)

The algorithm uses two steps: the first step computes the release times, and the second step use a critical determined from the first step in order to produces a optimal schedule in which all the tasks and their copies are executed at their release times.

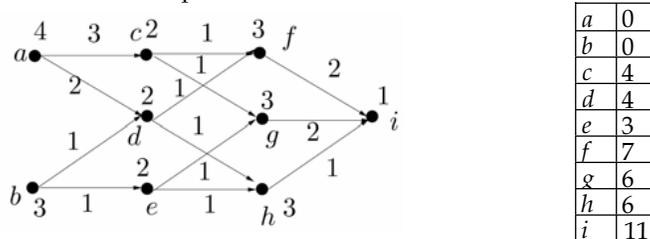


Figure 1.8. P_0 problem

The P_0 problem given by Figure 1.8 will be illustrated the algorithm. The algorithm which computes the release times is given next:

Algorithm 3 Release date algorithm and Earliest schedule

```

for  $i := 1$  to  $n$  do
  if  $PRED(i) = \emptyset$  then
     $b_i := 0$ 
  else
     $C := \max\{b_k + p_k + c_{ki} \mid k \in PRED(i)\};$ 
    Let be  $s$  such that :  $b_s + p_s + c_{si} = C$ ;
     $b_i := \max\{b_s + p_s : \max\{b_k + p_k + c_{ki} \mid k \in PRED(i) - \{s\}\}\}.$ 
  end if
end for

```

Each connected component $G_c = (V; E_c)$ on different processor;
 Each copy is executed at his release time.

Without loss of generality, all copies of the task i admit the same starting time, denoted by t_i , as the task i . An arc $(i, j) \in E$ is a critical arc if $b_i + p_i + c_{ij} > b_j$. From this definition, it is clear that if (i, j) is a critical arc, then in all as soon as possible schedule, each copy of a task j must be preceded by a copy of a task i on the same processor. In order to construct an earliest schedule, each critical path is allotted on a processor, and each copy is executed at his release date.

Theorem 1.5.1 Let b_i be the starting time computed by the procedure. For all feasible schedule for a graph G , the release date of a task i cannot be less than b_i . All sub-graph is spanning forest. The procedure gives a feasible schedule and the overall complexity is $O(n^2)$.

$\alpha (c_{ij}, \epsilon_{ij})$	Lower bound	References
$P (1, 1), dup$	$\rho \geq 5/4$	see (Bampis et al., 2000b)
$P (1, 1), dup$	poly	see (Chrétienne and Colin, 1991)
$P (c, c), dup$	$\rho \geq 1 + \frac{1}{c+3}$	see (Bampis et al., 1996)
$P (c, c), dup$	\mathcal{NP} -complete	see (Papadimitriou and Yannakakis, 1990)
$P(P2) (1, 0), dup$	$\rho \geq 4/3$	see (Angel et al., 2002)
$P(P2) (1, 0), dup$	poly	see (Bampis et al., 2000a)
$P(P2) (c, c), dup$	$\rho \geq 1 + \frac{1}{c+3}$	see (Giroudeau and König, 2004)
$P(P2) (c, c), dup$		

Table 1.2: Complexity results in presence of duplication




Figure 1.9 The critical sub-graph

An earliest schedule of the precedence graph P_0 is given by Figure 1.10.

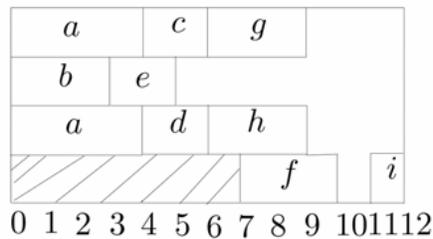


Figure 1.10: An earliest schedule of P_0

The study of duplication in presence of unbounded number of processors is theoretical. Indeed, the results on unbounded processors do not improved the results on limited number of processors. So, concerning the hierarchical model, since the number of processors per cluster is limited, the authors in (Bampis et al., 2000a) are investigate only on the theoretical aspect of associated scheduling problem.

$\alpha (c_{ij}, \epsilon_{ij})$	Upper bound	References
$P (1, 1), dup$	2-approx	(Munier and Hanen, 1997)
$\bar{P} (1, 1), dup$	poly	see (Chrétienne and Colin, 1991)
$P (c, c), dup$	3-approx	(Thurimella and Yesha, 1992)
$\bar{P} (c, c), dup$	2-approx	(Papadimitriou and Yannakakis, 1990)
$P(P2) (1, 0), dup$		
$\bar{P}(P2) (1, 0), dup$	poly	see (Bampis et al., 2000a)
$P(P2) (c, c), dup$		
$\bar{P}(P2) (c, c), dup$		

Table 1.3. Approximation results in presence of duplication

(c_{ij}, ϵ_{ij})	Lower bound	
	C_{max}	References
(1, 1)	$\rho \geq 9/8$	see (Hoogeveen et al., 1998)
(c, c)	$\rho \geq 1 + \frac{1}{2c+5}$	see (Giroudeau et al., 2005)
(1, 0)	$\rho \geq 7/6$	see (Giroudeau, 2000)
(2, 1)	$\rho \geq 9/8$	see (Giroudeau, 2005)
(c, c')	$\rho \geq 1 + \frac{1}{2c+4}$	see (Giroudeau and König, 2004)

Table 1.4. Threshold for the total sum of completion time minimization of unbounded number of machines

1.6 Total sum of completion time minimization

In this section, a threshold for total sum of completion time minimization problem is presented for some problems in the homogeneous and hierarchical model. The following table summarize all the results in the homogeneous communication delay model and the hierarchical communication delay model.

Theorem 1.6.1 *There is no polynomial-time algorithm for the problem $\bar{P}|prec; c_{ij} = 1; p_i = 1 | \sum_j C_j$ with performance bound smaller than $9/8$ unless $\mathcal{P} = \mathcal{NP}$ see (Hoogeveen et al, 1998).*

Proof

We suppose that there is a polynomial-time approximation algorithm denoted by A with performance guarantee bound smaller than $1 + \frac{1}{8}$. Let I be the instance of the problem $\bar{P}|prec; c_{ij} = 1; p_i = 1 | C_{max}$ obtained by a reduction (see Theorem 1.2.2).

Let I' be the instance of the problem $\bar{P}|prec; c_{ij} = 1; p_i = 1 | \sum_j C_j$ by adding x new tasks from an initial instance I . In the precedence constraints, each group of x (with $x > \frac{36+6\rho n}{9-8\rho}$) new tasks is a successor of the old tasks (old tasks are from the polynomial transformation used for the proof of Theorem 1.2.2). We obtain a complete directed graph from old tasks to new tasks.

Let $A(I')$ (resp. $A^*(I')$) be the result given by A (resp. an optimal result) on an instance I' .

1. If $A(I') < 8\rho x + 6\rho n$ then $A^*(I') < 8\rho x + 6\rho n$. So we can decide that there exists a scheduling of an instance I with $C_{max} \leq 6$. Indeed, we suppose that at most one (denoted by i) task of n old tasks is executed at $t = 6$. Among the x news tasks, at most one task may be executed on the same processor as i before $t = 9$. Then $A^*(I') > 9(x - 1)$. Thus, $x <$

$\frac{9+6\rho n}{9-8\rho}$. A contradiction with $x > \frac{36+6\rho n}{9-8\rho}$. Thus, it exists a schedule of length 6 on an old tasks.

2. . We suppose that $A(I') > 8\rho x + 6\rho n$. So, $A^*(I') \geq 8x + 6n$ because an algorithm A is a polynomial-time approximation algorithm with performance guarantee bound smaller than $\rho < 9/8$. There is no algorithm to decide whether the tasks from an instance I admit a schedule of length equal or less than 6.

Indeed, if there exists such an algorithm, by executing the x tasks at time $t = 8$, we obtain a schedule with a completion time strictly less than $8x + 6n$ (there is at least one task which is executed before the time $t = 6$). This is a contradiction since $A^*(I') \geq 8x + 6n$.

This concludes the proof of Theorem 1.6.1.

1.7 Conclusion

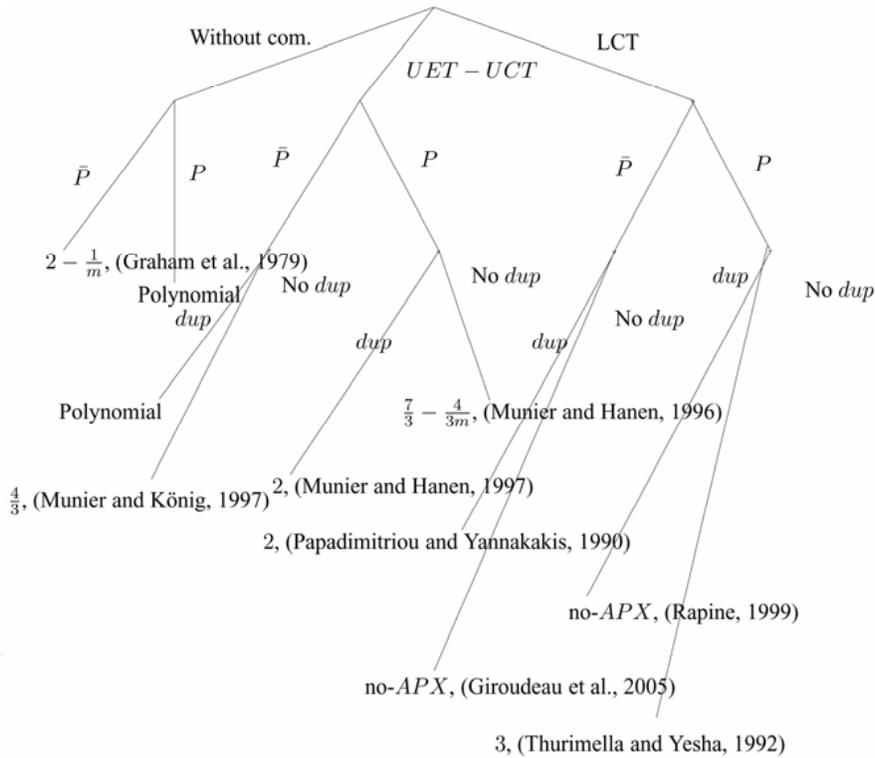


Figure 1.11. Principal results in UET-UCT model for the minimization of the length of the schedule

With the Figure 1.11, a question arises: "It exists a ρ -approximation algorithm with $\rho \in \text{INT}$ for the problems $\bar{P}[\text{prec}; c_{ij} = c; p_i = 1 | C_{max}]$ and $P[\text{prec}; c_{ij} = c; p_i = 1 | C_{max}]$?" Moreover, the hierarchical communication delays model is a model more complex as the homogeneous communication delays model. However, this model is not too complex since some analytical results were produced.

1.8 Appendix

In this section, we will give some fundamental results in theory of complexity and approximation with guaranteed performance. A classical method in order to obtain a lower for none approximation algorithm is given by the following results called "Impossibility theorem" (Chrétienne and Picouleau, 1995) and gap technic see (Ausiello et al., 1999).

Theorem 1.8.1 (Impossibility theorem) Consider a combinatorial optimization problem for which all feasible solutions have non-negative integer objective function value (in particular scheduling problem). Let c be a fixed positive integer. Suppose that the problem of deciding if there exists a feasible solution of value at most c is \mathcal{NP} -complete. Then, for any $\rho < (c + 1)/c$, there does not exist a polynomial-time ρ -approximation algorithm A unless $\mathcal{P} = \mathcal{NP}$, see ((Chrétienne and Picouleau, 1995), (Ausiello et al, 1999))

Theorem 1.8.2 (The gap technic) Let Q' be an \mathcal{NP} -complete decision problem and let Q be an NPO minimization problem. Let us suppose that there exist two polynomial-time computable functions $f : I_{Q'} \rightarrow I_Q$ and $d : I_{Q'} \rightarrow \mathbb{N}$ and a constant $gap > 0$ such that, for any instance x of Q' .

$$S^*(f(x)) = \begin{cases} d(x) \\ d(x)(1 + gap) \end{cases}$$

Then no polynomial-time r -approximate algorithm for Q with $r < 1 + gap$ can exist, unless $\mathcal{P} = \mathcal{NP}$, see (Ausiello et al, 1999).

1.8.1 List of \mathcal{NP} -complete problems

In this section, some classical \mathcal{NP} -complete problems are listed, which are used in this chapter for the polynomial-time transformation.

One-in-(2, 3)SAT(2, $\bar{1}$) problem

Instances: We consider a logic formula with clauses of size two or three, and each positive literal (resp. negative literal) occurs twice (resp. once). The aim is to find exactly one true literal per clause. Let n be a multiple of 3 and let \mathcal{C} be a set of clauses of size 2 or 3. There are n clauses of size 2 and $n/3$ clauses of size 3 so that:

- each clause of size 2 is equal to $(x \vee \bar{y})$ for some $x, y \in \mathcal{V}$ with $x \neq y$.
- each of the n literals x (resp. of the literals \bar{x}) for $x \in \mathcal{V}$ belongs to one of the n clauses of size 2, thus to only one of them.
- each of the n literals x belongs to one of the $n/3$ clauses of size 3, thus to only one of them.
- whenever $(x \vee \bar{y})$ is a clause of size 2 for some $x, y \in \mathcal{V}$, then x and y belong to different clauses of size 3.

We would insist on the fact that each clause of size three yields six clauses of size two.

Question:

Is there a truth assignment for $I: \mathcal{V} \rightarrow \{0,1\}$ such that every clause in \mathcal{C} has exactly one true literal?

Clique problem

Instances: Let be $G = (V, E)$ a graph and k a integer.

Question: There is a clique (a complete sub-graph) of size k in G ?

3 - SAT problem

Instances:

- Let be $\mathcal{V} = \{x_1, \dots, x_n\}$ a set of n logical variables.
- Let be $\mathcal{C} = \{C_1, \dots, C_m\}$ a set of clause of length three: $(x_{c_i} \vee y_{c_i} \vee z_{c_i})$.

Question: There is $I: \mathcal{V} \rightarrow \{0,1\}$ a assignment

1.8.2 Ratio of approximation algorithm

This value is defined as the maximum ratio, on all instances I , between maximum objective value given by algorithm h (denoted by $\mathcal{K}^h(I)$) and the optimal value (denoted by $\mathcal{K}^{opt}(I)$), i.e.

$$\rho^h = \max_I \frac{\mathcal{K}^h(I)}{\mathcal{K}^{opt}(I)}.$$

Clearly, we have $\rho^h \geq 1$.

1.8.3 Notations

The notations of this chapter will be precised by using the *three fields* notation scheme, proposed by Graham et al. (Graham et al., 1979):


- $\alpha \in \{P, \bar{P}, \bar{P}(P2)\}$
 - If $\alpha = P$ the number of processors is limited,
 - If $\alpha = \bar{P}$, then the number of processors is not limited,
 - If $\alpha = \bar{P}(P2)$, then we have unbounded number of clusters constituted by two processors each,
- $\beta = \beta_1\beta_2\beta_3\beta_4$ where:
 - If $\beta_1 = \text{prec}$ (the precedence graph unspecified)
 - $\beta_2 \in \{c\}$
 - If $\beta_2 = c$ (the communication delay between two tasks admitting a precedence constraint is equal to c)
 - $\beta_3 \in \{p_j\}$
 - If $\beta_3 = p_j = 1$ (the processing time of all the tasks is equal to one).
 - $\beta_4 \in \{\text{dup}, \cdot\}$
 - If $\beta_4 = \text{dup}$ (the duplication of task is allowed)
 - Si $\beta_4 = \cdot$ (the duplication of task is not allowed)
- γ is the objective function:
 - the minimization of the makespan, denoted by C_{max}
 - the minimization of the total sum of completion time, denoted by $\sum_j C_j$ where $C_j = t_j + p_j$

1.9 References

- Anderson, T., Culler, D., Patterson, D., and the NOW team (1995). A case for NOW(networks of workstations). *IEEE Micro*, 15:54–64.
- Angel, E., Bampis, E., and Giroudeau, R. (2002). Non-approximability results for the hierarchical communication problem with a bounded number of clusters. In B.Monien, R. F., editor, *EuroPar'02 Parallel Processing*, LNCS, No. 2400, pages 217–224. Springer-Verlag.
- Ausiello, G., Crescenzi, P., Gambosi, G., Kann, V., Marchetti-Spaccamela, A., and Protasi, M. (1999). *Complexity and Approximation*, chapter 3, pages 100–102. Springer.
- Bampis, E., Giannakos, A., and König, J. (1996). On the complexity of scheduling with large communication delays. *European Journal of Operation Research*, 94:252–260.
- Bampis, E., Giroudeau, R., and König, J. (2000a). Using duplication for multiprocessor scheduling problem with hierarchical communications. *Parallel Processing Letters*, 10(1):133–140.

- Bampis, E., Giroudeau, R., and König, J. (2002). On the hardness of approximating the precedence constrained multiprocessor scheduling problem with hierarchical communications. *RAIRO-RO*, 36(1):21–36.
- Bampis, E., Giroudeau, R., and König, J. (2003). An approximation algorithm for the precedence constrained scheduling problem with hierarchical communications. *Theoretical Computer Science*, 290(3):1883–1895.
- Bampis, E., Giroudeau, R., and König, J.-C. (2000b). A heuristic for the precedence constrained multiprocessor scheduling problem with hierarchical communications. In Reichel, H. and Tison, S., editors, *Proceedings of STACS*, LNCS No. 1770, pages 443–454. Springer-Verlag.
- Bhatt, S., Chung, F., Leighton, F., and Rosenberg, A. (1997). On optimal strategies for cycle-stealing in networks of workstations. *IEEE Trans. Comp.*, 46:545–557.
- Blayo, E., Debreu, L., Mounié, G., and Trystram, D. (1999). Dynamic load balancing for ocean circulation model adaptive meshing. In et al., P. A., editor, *Proceedings of Europar*, LNCS No. 1685, pages 303–312. Springer-Verlag.
- Blumafe, R. and Park, D. (1994). Scheduling on networks of workstations. In *3d Inter Symp. of High Performance Distr. Computing*, pages 96–105.
- Chen, B., Potts, C., and Woeginger, G. (1998). A review of machine scheduling: complexity, algorithms and approximability. Technical Report Woe-29, TU Graz.
- Chrétienne, P. and Colin, J. (1991). C.P.M. scheduling with small interprocessor communication delays. *Operations Research*, 39(3):680–684.
- Chrétienne, P. and Picouleau, C. (1995). *Scheduling Theory and its Applications*. John Wiley & Sons. Scheduling with Communication Delays: A Survey, Chapter 4.
- Decker, T. and Krandick, W. (1999). Parallel real root isolation using the descartes method. In *HiPC99*, volume 1745 of LNCS. Springer-Verlag.
- Dutot, P. and Trystram, D. (2001). Scheduling on hierarchical clusters using malleable tasks. In *13th ACM Symposium of Parallel Algorithms and Architecture*, pages 199–208.
- Garey, M. and Johnson, D. (1979). *Computers and Intractability, a Guide to the Theory of NP-Completeness*. Freeman.
- Giroudeau, R. (2000). *L'impact des délais de communications hiérarchiques sur la complexité et l'approximation des problèmes d'ordonnement*. PhD thesis, Université d'Évry Val d'Essonne.
- Giroudeau, R. (2005). Seuil d'approximation pour un problème d'ordonnement en présence de communications hiérarchiques. *Technique et Science Informatique*, 24(1):95–124.
- Giroudeau, R. and König, J. (2004). General non-approximability results in presence of hierarchical communications. In *Third International Workshop on Algorithms, Models and Tools for Parallel Computing on Heterogeneous Networks*, pages 312–319. IEEE.
- Giroudeau, R. and König, J. (accepted). General scheduling non-approximability results in presence of hierarchical communications. *European Journal of Operational Research*.
- Giroudeau, R., König, J., Moulai, F., and Palaysi, J. (2005). Complexity and approximation for the precedence constrained scheduling problem with large communications delays. In J.C. Cunha, P.M., editor, *Proceedings of Europar*, LNCS, No. 3648, pages 252–261. Springer-Verlag.

- Graham, R., Lawler, E., Lenstra, J., and Kan, A. R. (1979). Optimization and approximation in deterministic sequencing and scheduling theory: a survey. *Annals of Discrete Mathematics*, 5:287–326.
- Hoogeveen, H., Schuurman, P., and Woeginger, G. (1998). Non-approximability results for scheduling problems with minsum criteria. In Bixby, R., Boyd, E., and Ríos-Mercado, R., editors, *IPCO VI*, Lecture Notes in Computer Science, No. 1412, pages 353–366. Springer-Verlag.
- Hoogeveen, J., Lenstra, J., and Veltman, B. (1994). Three, four, five, six, or the complexity of scheduling with communication delays. *Operations Research Letters*, 16(3):129–137.
- Ludwig, W. T. (1995). *Algorithms for scheduling malleable and nonmalleable parallel tasks*. PhD thesis, University of Wisconsin-Madison, Department of Computer Sciences.
- Mounié, G. (2000). *Efficient scheduling of parallel application : the monotonic malleable tasks*. PhD thesis, Institut National Polytechnique de Grenoble.
- Mounié, G., Rapine, C., and Trystram, D. (1999). Efficient approximation algorithm for scheduling malleable tasks. In *11th ACM Symposium of Parallel Algorithms and Architecture*, pages 23–32.
- Munier, A. and Hanen, C. (1996). An approximation algorithm for scheduling unitary tasks on m processors with communication delays. Private communication.
- Munier, A. and Hanen, C. (1997). Using duplication for scheduling unitary tasks on m processors with communication delays. *Theoretical Computer Science*, 178:119–127.
- Munier, A. and König, J. (1997). A heuristic for a scheduling problem with communication delays. *Operations Research*, 45(1):145–148.
- Papadimitriou, C. and Yannakakis, M. (1990). Towards an architectureindependent analysis of parallel algorithms. *SIAM J. Comp.*, 19(2):322–328.
- Pfister, G. (1995). *In Search of Clusters*. Prentice-Hall.
- Picouleau, C. (1995). New complexity results on scheduling with small communication delays. *Discrete Applied Mathematics*, 60:331–342.
- Rapine, C. (1999). *Algorithmes d'approximation garantie pour l'ordonnancement de tâches, Application au domaine du calcul parallèle*. PhD thesis, Institut National Polytechnique de Grenoble.
- Rosenberg, A. (1999). Guidelines for data-parallel cycle-stealing in networks of workstations I: on maximizing expected output. *Journal of Parallel Distributing Computing*, 59(1):31–53.
- Rosenberg, A. (2000). Guidelines for data-parallel cycle-stealing in networks of workstations II: on maximizing guarantee output. *Intl. J. Foundations of Comp. Science*, 11:183–204.
- Saad, R. (1995). Scheduling with communication delays. *JCMCC*, 18:214–224.
- Schrijver, A. (1998). *Theory of Linear and Integer Programming*. John Wiley & Sons.
- Thurimella, R. and Yesha, Y. (1992). A scheduling principle for precedence graphs with communication delay. In *International Conference on Parallel Processing*, volume 3, pages 229–236.
- Turek, J., Wolf, J., and Yu, P. (1992). Approximate algorithms for scheduling parallelizable tasks. In *4th ACM Symposium of Parallel Algorithms and Architecture*, pages 323–332.
- Veltman, B. (1993). *Multiprocessor scheduling with communications delays*. PhD thesis, CWI-Amsterdam, Holland.

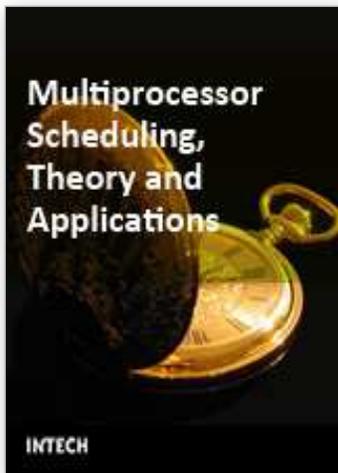

Multiprocessor Scheduling, Theory and Applications

Edited by Eugene Levner

ISBN 978-3-902613-02-8

Hard cover, 436 pages

Publisher I-Tech Education and Publishing

Published online 01, December, 2007

Published in print edition December, 2007

A major goal of the book is to continue a good tradition - to bring together reputable researchers from different countries in order to provide a comprehensive coverage of advanced and modern topics in scheduling not yet reflected by other books. The virtual consortium of the authors has been created by using electronic exchanges; it comprises 50 authors from 18 different countries who have submitted 23 contributions to this collective product. In this sense, the volume can be added to a bookshelf with similar collective publications in scheduling, started by Coffman (1976) and successfully continued by Chretienne et al. (1995), Gutin and Punnen (2002), and Leung (2004). This volume contains four major parts that cover the following directions: the state of the art in theory and algorithms for classical and non-standard scheduling problems; new exact optimization algorithms, approximation algorithms with performance guarantees, heuristics and metaheuristics; novel models and approaches to scheduling; and, last but not least, several real-life applications and case studies.

How to reference

In order to correctly reference this scholarly work, feel free to copy and paste the following:

R. Giroudeau and J.C. Koenig (2007). Scheduling with Communication Delays, Multiprocessor Scheduling, Theory and Applications, Eugene Levner (Ed.), ISBN: 978-3-902613-02-8, InTech, Available from: http://www.intechopen.com/books/multiprocessor_scheduling_theory_and_applications/scheduling_with_communication_delays

INTECH
open science | open minds

InTech Europe

University Campus STeP Ri
Slavka Krautzeka 83/A
51000 Rijeka, Croatia
Phone: +385 (51) 770 447
Fax: +385 (51) 686 166
www.intechopen.com

InTech China

Unit 405, Office Block, Hotel Equatorial Shanghai
No.65, Yan An Road (West), Shanghai, 200040, China
中国上海市延安西路65号上海国际贵都大饭店办公楼405单元
Phone: +86-21-62489820
Fax: +86-21-62489821

© 2007 The Author(s). Licensee IntechOpen. This chapter is distributed under the terms of the [Creative Commons Attribution-NonCommercial-ShareAlike-3.0 License](https://creativecommons.org/licenses/by-nc-sa/3.0/), which permits use, distribution and reproduction for non-commercial purposes, provided the original is properly cited and derivative works building on this content are distributed under the same license.

IntechOpen

IntechOpen